

NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output

bel
POWER PRODUCTS

xRPF-20A1A0

RoHS Compliant

- Non-Isolated
- Fixed Frequency (275 kHz)
- High Efficiency
- High Power Density
- Power Good Output Signal (open collector)
- Under-Voltage Lockout (UVLO)
- Wide Trim Range
- Converter Can Sink and Source Current
- OCP/SCP
- Remote On/Off
- Low Cost



Description

The Bel xRPF-20A1A0 is a new high density open frame non-isolated converter series for space sensitive applications. Each model has a wide input range (10.2V-13.8V) and offers a wide range of output voltage (0.9 V - 5.0 V) with a 20 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 V to any value up to the 5.0 V maximum. Typical efficiency is 92% at $V_o=5\text{ V}$, $V_{in}=12\text{ V}$ at full load. Typical features include remote on/off, under-voltage lockout, over-current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Vertical Mount	Model Number Horizontal Mount
0.9 V - 5.0 V	12 V	20 A	100 W	92%	VRPF-20A1A0	0RPF-20A1A0

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	13.8 V	
Output Enable Terminal Voltage	-0.3 V	-	13.8 V	
Ambient Temperature	0 °C	-	80 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10.2 V	-	13.8 V	
Input Current (Source)				
$V_o=5.0\text{ V}$	-	9.1 A	-	
$V_o=2.5\text{ V}$	-	4.9 A	-	
$V_o=0.9\text{ V}$	-	2.2 A	-	
Input Current (Sink)				
$V_o=2.5\text{ V}$	-	-3.44 A	-	Able to sink 20 A output current at any output voltage up to and including 2.5 V.
$V_o=0.9\text{ V}$	-	-0.97 A	-	
Input Current (No Load)	-	95 mA	-	
Remote Off Input Current	-	5 mA	10 mA	

NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current (pk-pk)				Tested with simulated source impedance of 1.5 uH 5Hz to 20 MHz, and 2 × 270 uF/16 V Oscon capacitors (ESR ≤ 20 mΩ) at the input
Vo=5.0 V	-	280 mA	350 mA	
Vo=3.3 V	-	250 mA	320 mA	
Vo=2.5 V	-	200 mA	280 mA	
Vo=0.9 V	-	150 mA	250 mA	
Input Reflected Ripple Current (rms)				
Vo=5.0 V	-	80 mA	120 mA	
Vo=3.3 V	-	70 mA	100 mA	
Vo=2.5 V	-	45 mA	80 mA	
Vo=0.9 V	-	40 mA	60 mA	
External Input Capacitance	-	540 uF	-	
Turn-on Voltage Threshold	8.5 V	9.0 V	9.5 V	
Turn-off Voltage Threshold	7.0 V	7.6 V	8.3 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	-2.5%Vo,set	-	2.5%Vo,set	Vin=12 V, Io=Iomax, full load	
Output Voltage Set Point	-3.5%Vo,set	-	3.5%Vo,set	Over all operating input voltage, resistive load, and temperature conditions	
Load Regulation				Io=Iomin to Iomax	
Vo=5.0 V	-	-	0.4%Vo,set		
Vo=3.3 V	-	-	0.4%Vo,set		
Vo=2.5 V	-	-	0.5%Vo,set		
Vo=0.9 V	-	-	1%Vo,set		
Line Regulation	-	-	0.5%Vo,set	Vin=Vinmin to Vinmax	
Output Ripple and Noise (pk-pk)				Tested at 0-20 MHz BW, with a 680 uF/6.3 V Oscon capacitor (ESR ≤ 12 mΩ), 10uF/16V Tantalum capacitor, and 10nF ceramic capacitor at the output.	
Vo=5.0 V	-	65 mV	80 mV		
Vo=3.3 V	-	60 mV	75 mV		
Vo=2.5 V	-	55 mV	70 mV		
Vo=0.9 V	-	45 mV	55 mV		
Output Ripple and Noise (rms)					
Vo=5.0 V	-	18 mV	25 mV		
Vo=3.3 V	-	15 mV	25 mV		
Vo=2.5 V	-	15 mV	20 mV		
Vo=0.9 V	-	10 mV	15 mV		
Output Current	0 A	-	20 A		
Current Limit Threshold	25 A	-	40 A		
Short Circuit Surge Transient	-	-	0.1 A ² s		
Turn on Time	-	5 mS	10 mS		
Overshoot at Turn on	-	0%Vo	3%Vo		
Output Capacitance					
Vo=5.0 V	680 uF	-	5080 uF		
Vo=2.5 V	680 uF	-	7840 uF		
Vo=0.9 V	680 uF	-	11000 uF		
Transient Response					
50% ~ 75% Max Load	Vo=0.9 V-5.0 V	-	100 mV	150 mV	Test conditions: di/dt=2.5 A/uS; Vin=12 V; with a 680 uF/6.3 V Oscon capacitor (ESR ≤ 12 mΩ), 10 uF/16 V Tantalum capacitor, and 10 nF ceramic capacitor at the output.
Settling Time		-	40 uS	80 uS	
75% ~ 50% Max Load		-	100 mV	150 mV	
Settling Time		-	40 uS	80 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency (Current Source)				Measured at Vin=12 V, full load.
Vo=5.0 V	89%	92%	-	
Vo=3.3 V	86%	89%	-	
Vo=2.5 V	83%	86%	-	
Efficiency (Current Sink)				
Vo=2.5 V	79%	82%	-	
Vo=0.9 V	60%	63%	-	
Switching Frequency	240 kHz	275 kHz	310 kHz	
Output Voltage Trim Range	0.9 V	-	5.0 V	Vo=0.9 V when the Trim pin is open.
MTBF	5,570,000 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				VRPF-20A1A0
Inches (L x W x H)	1.2 x 1.1 x 0.457			
Millimeters (L x W x H)	30.48 x 27.94 x 11.6			
Dimensions				ORPF-20A1A0
Inches (L x W x H)	1.2 x 1.1 x 0.508			
Millimeters (L x W x H)	30.48 x 27.94 x 12.91			
Weight	-	15 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin open, unit on.
Signal High (Unit On)	2.4 V	-	13.8 V	
Power Good				
Power Good Delay ¹	-	-	8 mS	


Note: All specifications are typical at 25 °C unless otherwise stated.

1. the power good signal is an open collector output. When the output of the module reaches 90% of the nominal set point, the power good pin is set high.

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground. Trim values should not be less than 280Ω.

$$R_{trim} = \frac{1.17}{V_{adj} - 0.9}$$

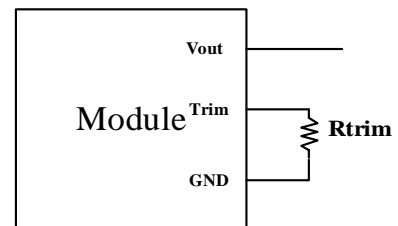

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$R_t = \frac{R_s \times (1.3V_t - 1.17)}{1.17 - R_s \times (V_{adj} - 0.9)}$$



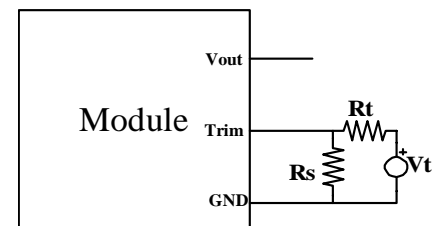


NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output



Efficiency Data

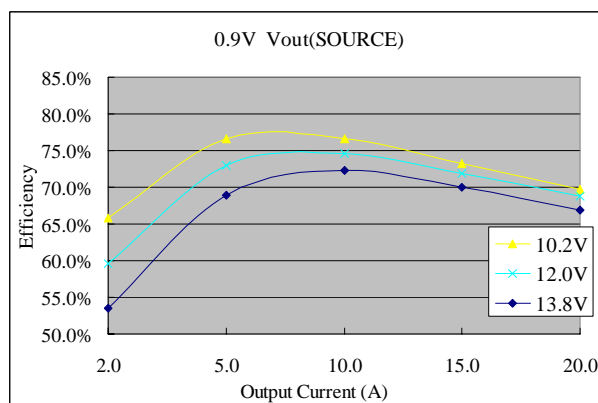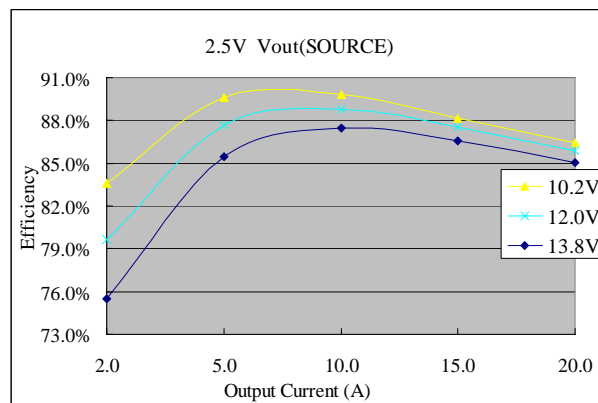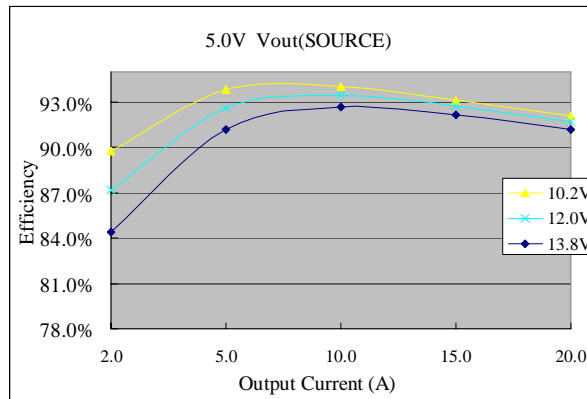


NON-ISOLATED DC/DC CONVERTERS


12 V Input 0.9 V-5.0 V/20 A Output




Thermal Derating Curves

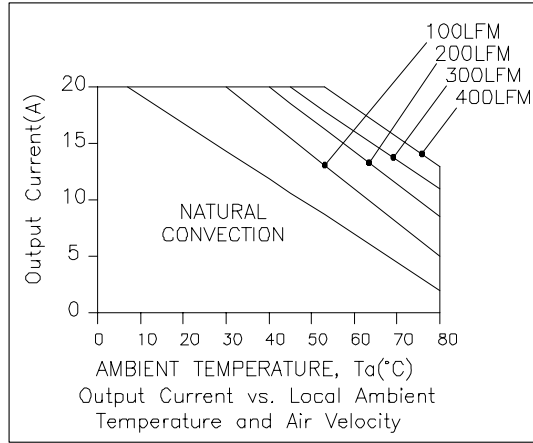

$V_o=5\text{ V}; V_{in}=12\text{ V}$

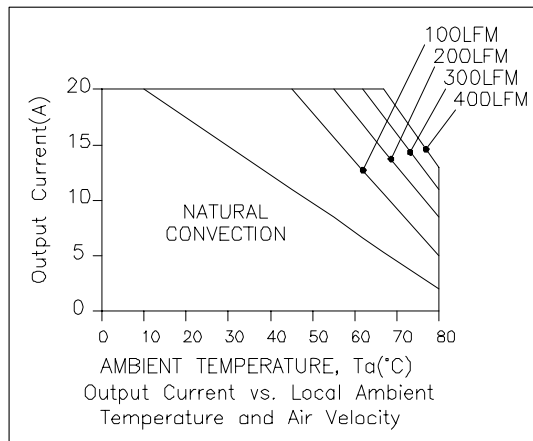

$V_o=2.5\text{ V}; V_{in}=12\text{ V}$

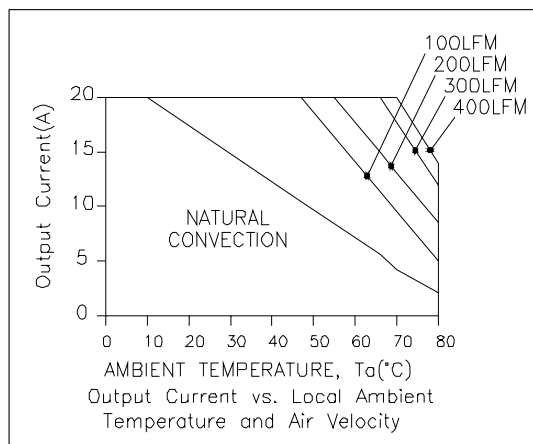



$V_o=0.9\text{ V}; V_{in}=12\text{ V}$

NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output




VRPF-20A1A0

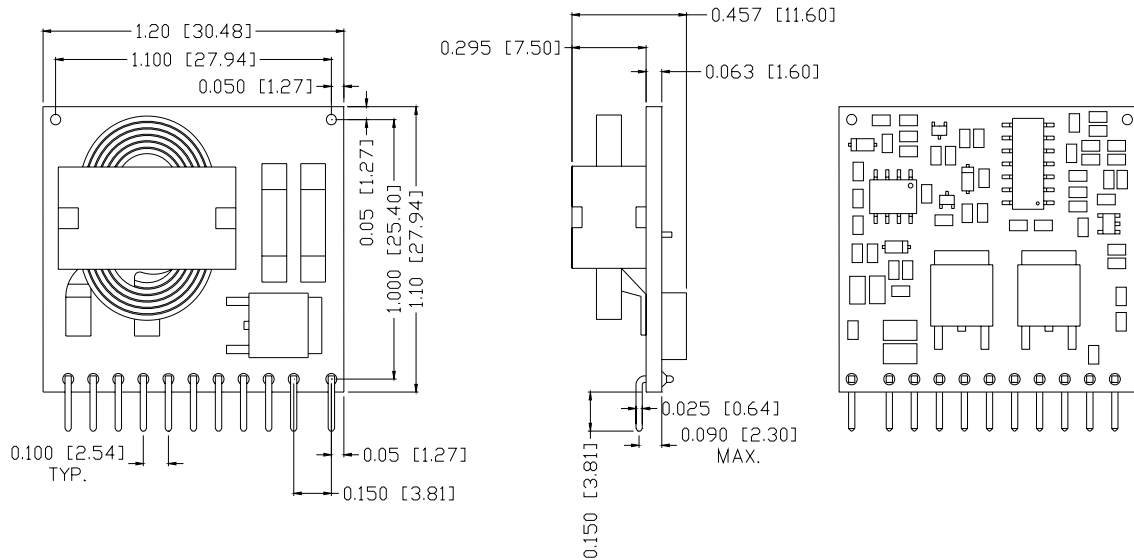

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Reserved
10	Vin
11	Vin


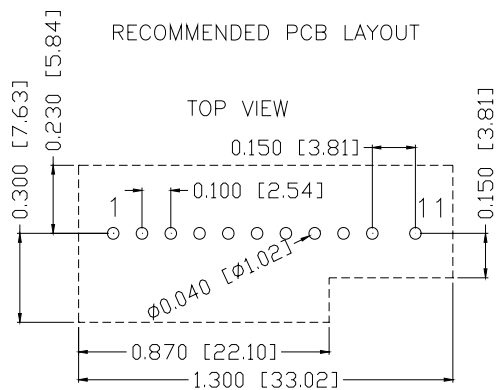


NON-ISOLATED DC/DC CONVERTERS

12 V Input 0.9 V-5.0 V/20 A Output



ORPF-20A1A0

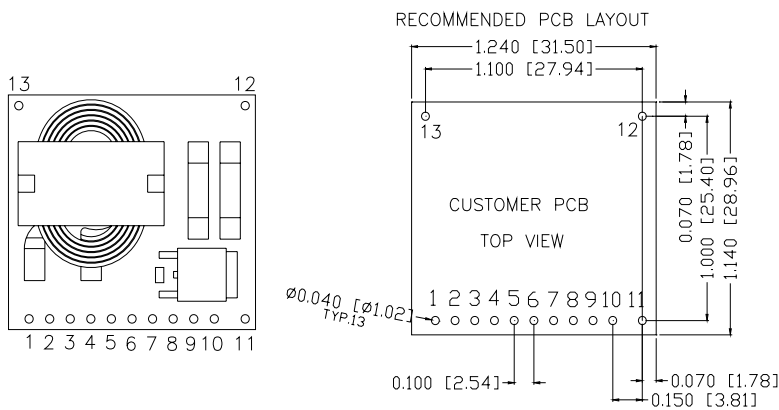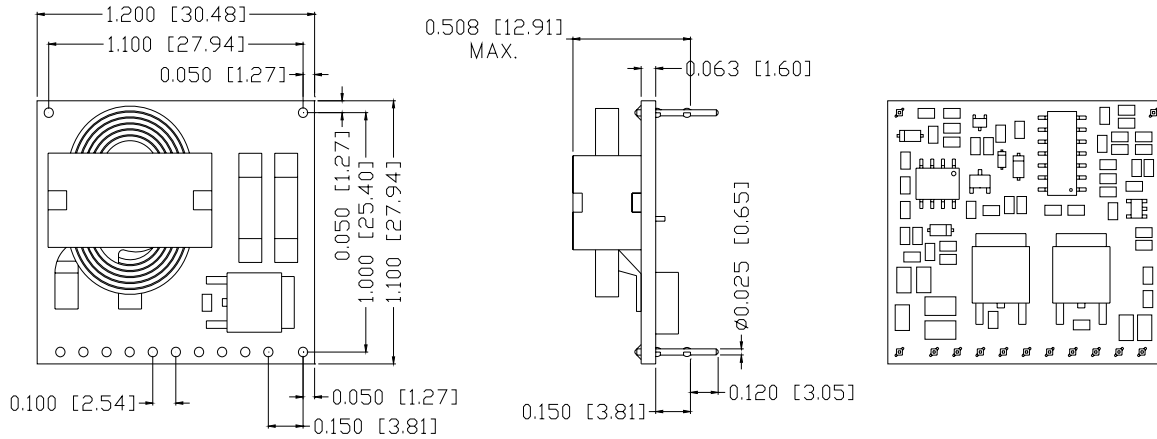

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Pwrqd_set
10	Vin
11	Vin
12	Support Pin
13	Support Pin

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2005 Bel Fuse Inc. Specifications subject to change without notice. 082405

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com