

# Energy Management Modular Smart Power Quality Transducer Type PQT-H



- Up to 12 optional digital inputs (sync function, remote digital input control)
- Up to 16 optional digital outputs (pulse, alarm, remote control)
- 16 freely configurable alarms with OR/AND logic linkable with up to 4 relay outputs and up to 16 open collector outputs
- Up to 8 optional analogue outputs (+20mA, +10VDC, +/- 5mA)
- Universal power supply: 18-60VAC/VDC, 90-260 VAC/VDC
- Protection degree: IP 20

- Class 0.2 (current/voltage)
- ARM<sup>®</sup> powered
- Measurement of single phase and system instantaneous variables: W, var, VA, PF, VLL, VLN, A<sub>L</sub>, A<sub>n</sub>, Hz, THD, ASY VLL, ASY VLN (for all measurements max, min, dmd/AVG and max dmd/AVG values)
- Measured energies (imported/exported): kWh and kvarh
- Current and voltage inputs with autoranging capability
- Instantaneous variable in IEEE-754 floating point format
- Total and partial energies unsigned 64bit data format
- Energy measurements according to ANSI C12.20, CA 0.5, EN62053-22 CL 0.5S and ANSI C12.1, EN62053-23 CL 2
- 4 total 3-phase, 48 partial 3-phase and 12 total single phase independent energy meters to be used as single, dual, multi-time tariff management
- Harmonic distortion analysis (FFT) up to the 63<sup>rd</sup> harmonic with numeric indication (current and voltage)
- Harmonics source detection
- Data stamping of up to 10,000 events: alarm, min, max, digital input status, digital output status as remote control, resets
- 3 independent communication ports: optional RS 422/485 serial port, optional RS232 + real time clock function (with back-up), optional Ethernet port
- MODBUS RTU and TCP, JBUS protocol, iFIX SCADA compatibility
- Real time clock function (without back-up)

## Product Description

3-phase utility grade power quality transducer. Particularly recommended for the measurement of the main electrical variables. Housing for DIN rail mounting. RS485/RS232 commu-

nication ports, Ethernet port, pulse and alarm outputs available on request. Parameters programming and data reading by means of PqtHSoft.

## How to order

PQT-H see next page

## How to order

PqtHSoft

Parameters programming and data reading by means of PqtHSoft.

## Modules Combination

| Description                        | Part N. | Slot A | Slot B | Slot C | Slot D | Slot E |
|------------------------------------|---------|--------|--------|--------|--------|--------|
| PQT-H base                         | AD2020  |        |        |        |        |        |
| Power supply (18-60VAC/DC)         | AP1021  |        |        |        |        |        |
| Power supply (90-260VAC/DC)        | AP1020  |        |        |        |        |        |
| Measuring input (AV5: 400/690VL-L) | AQ2030  |        |        |        |        |        |
| Measuring input (AV6: 120/208VL-L) | AQ2031  |        |        |        |        |        |
| RS485 port (9 600 bps)             | AR1034  |        | 1-port |        |        |        |
| RS485 port (115,200 bps)           | AR2040  |        | 1-port |        |        |        |
| Ethernet/Internet port             | AR1061  | 1-port |        |        |        |        |
| Analogue output (20mA DC)          | AO2050  | 2-out  | 2-out  |        |        |        |
| Analogue output (10V DC)           | AO2051  | 2-out  | 2-out  | 2-out  | 2-out  |        |
| Analogue output (+/-5mA DC)        | AO2052  | 2-out  | 2-out  | 2-out  | 2-out  |        |
| Relay output                       | AO1058  | 1-out  | 1-out  | 1-out  | 1-out  |        |
| Relay output                       | AO1035  |        |        | 2-out  | 2-out  |        |
| Open collector output              | AO1059  | 1-out  | 1-out  | 1-out  | 1-out  |        |
| Open collector output              | AO1036  | 2-out  | 2-out  | 2-out  | 2-out  |        |
| Open collector output              | AO1037  | 4-out  | 4-out  | 4-out  | 4-out  |        |
| Digital inputs                     | AQ1038  | 3-in   | 3-in   | 3-in   | 3-in   |        |
| Digital inputs + Aux               | AQ1042  | 3-in   | 3-in   | 3-in   | 3-in   |        |
| RS232 port + RTC (9 600 bps)       | AR1039  |        |        |        |        | 1-port |



## How to order PQT-H


Ordering key (fully assembled instrument):

PQT-H AV53 H XX XX XX XX XX

| Description  | Ch | Part No. | Legend |
|--|----|----------|--------|
| <b>Model</b>   |    |          |        |
| PQT-H base   |    | AD2020   | PQT-H  |
| <b>Range code + system (measuring inputs)</b>                        |    |          |        |
| 400/690VL-L 1/5A (10A)   |    | AQ2030   | AV5.3  |
| 120/208VL-L 1/5A (10A)   |    | AQ2031   | AV6.3  |
| <b>Power supply</b>  |    |          |        |
| 18-60VAC/DC power supply   |    | AP1021   | L      |
| 90-260VAC/DC power supply  |    | AP1020   | H      |
| <b>SLOT A</b>  |    |          |        |
| None   |    |          | XX     |
| Ethernet/Internet port   | 1  | AR1061   | E2     |
| Digital inputs   | 3  | AQ1038   | D1     |
| Digital inputs + aux   | 3  | AQ1042   | D2     |
| Open collector output  | 4  | AO1037   | O4     |
| Open collector output  | 2  | AO1036   | O2     |
| Open collector output  | 1  | AO1059   | O1     |
| Relay output   | 1  | AO1058   | R1     |
| Analogue output 20mADC   | 2  | AO2050   | B1     |
| Analogue output 10VDC  | 2  | AO2051   | W1     |
| Analogue output +/-5mA   | 2  | AO2052   | B2     |
| <b>SLOT B</b>  |    |          |        |
| None   |    |          | XX     |
| Digital inputs   | 3  | AQ1038   | D1     |
| Digital inputs + aux   | 3  | AQ1042   | D2     |
| Open collector output  | 4  | AO1037   | O4     |
| Open collector output  | 2  | AO1036   | O2     |
| Open collector output  | 1  | AO1059   | O1     |
| Relay output   | 1  | AO1058   | R1     |
| Analogue output 20mADC   | 2  | AO2050   | B1     |
| Analogue output 10VDC  | 2  | AO2051   | W1     |
| Analogue output +/-5mA   | 2  | AO2052   | B2     |
| RS485 9600bps  | 1  | AR1034   | S1     |
| RS485 115200bps  | 1  | AR2040   | S2     |
| <b>SLOT C</b>  |    |          |        |
| None   |    |          | XX     |
| Digital inputs   | 3  | AQ1038   | D1     |
| Digital inputs + aux   | 3  | AQ1042   | D2     |
| Open collector output  | 4  | AO1037   | O4     |
| Open collector output  | 2  | AO1036   | O2     |
| Open collector output  | 1  | AO1059   | O1     |
| Relay output   | 1  | AO1058   | R1     |
| Relay output   | 2  | AO1035   | R2     |
| Analogue output 10VDC  | 2  | AO2051   | W1     |
| Analogue output +/-5mA   | 2  | AO2052   | xx     |
| <b>SLOT D</b>  |    |          |        |
| None   |    |          | XX     |
| Digital inputs   | 3  | AQ1038   | D1     |
| Digital inputs + aux   | 3  | AQ1042   | D2     |
| Open collector output  | 4  | AO1037   | O4     |
| Open collector output  | 2  | AO1036   | O2     |
| Open collector output  | 1  | AO1059   | O1     |
| Relay output   | 1  | AO1058   | R1     |
| Relay output   | 2  | AO1035   | R2     |
| Analogue output 10VDC  | 2  | AO2051   | W1     |
| Analogue output +/-5mA   | 2  | AO2052   | B2     |
| <b>OPTIONS SLOT E</b>  |    |          |        |
| Utility grade  |    |          | XX     |
| RS232 + RTC (utility grade)  | 1  | AR1039   | SX     |
| Revenue approval.  |    |          | XU     |
| An "instrument setting" form must be properly filled up by the user. |    |          |        |
| RS232+RTC + "XU" option  | 1  | AR1039   | SU     |

Example of which modules to order for:  
PQT-H AV53 H B1 S1 R2 O2 SX

| Bill of material                    | Ordering No. |
|-------------------------------------|--------------|
| PQT-H                               | AD2020       |
| AV53 measuring inputs (400/690VL-L) | AQ2030       |
| 90-260VAC/DC power supply           | AP1020       |
| Analogue output 20mA (2 channels)   | AO2050       |
| RS485 serial port 9600 bps          | AR1034       |
| Relay output (2 channels)           | AO1035       |
| Open collector (2 channels)         | AO1036       |
| RS232 port+RTC                      | AR1039       |

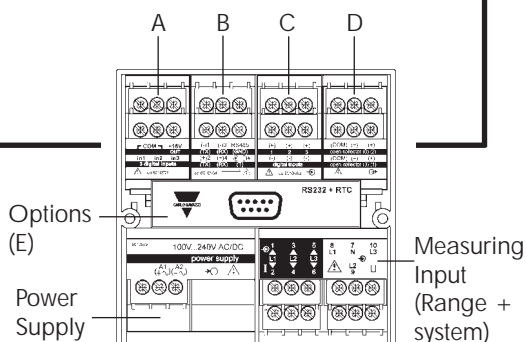

## Input specifications

|   |  |   |  |
|---|--|---|--|
| <b>Number of analogue inputs</b>  |  | Energies<br>(@ 20°C ± 5°C, R.H. ≤ 75%)            | Active: class 0.5 according to EN62053-22, ANSI C12.20<br>Reactive: class 2 according to EN62053-23, ANSI C12.1<br>In: 5A, I <sub>max</sub> : 10A<br>0.1In: 500mA,<br>Start-up current: 5mA<br>Un: 400/690V <sub>L-L</sub> (AV5)<br>Un: 120/208V <sub>L-L</sub> (AV6)<br>1% FS (FS: 100%)<br>phase: ±2°; I <sub>min</sub> : 5mA <sub>RMS</sub> ;<br>I <sub>max</sub> : 15Ap; U <sub>min</sub> : 30V <sub>RMS</sub> ;<br>U <sub>max</sub> : 500Vp |
| Current   | 1 (1-phase; system code: 3)<br>3 (3-phase; system code: 3)   | Harmonic distortion<br>(@ 20°C ± 5°C, R.H. ≤ 75%) |  |
| Voltage   | 1 (1-phase; system code: 3)<br>4 (3-phase; system code: 3)   |   |  |
| <b>Digital inputs (on request)</b>  | Up to 12   |   |  |
| AQ1038  | No. of inputs: 3 (voltage-free)  |   |  |
| Purpose   | "dmd" measurements<br>synchronisation.<br>Tariff selection: energy.<br>Contact status reading.<br>Clock synchronisation.   |   |  |
| Contact measuring current   | <8mA/ 17.5 to 25VDC  |   |  |
| AQ1042  | Number of inputs: 3 +<br>excitation output   |   |  |
| Purpose   | "dmd" measurements<br>synchronisation.<br>Tariff selection: energy.<br>Contact status reading.<br>Clock synchronisation.   |   |  |
| Excitation output   | 16V<+Aux<24VDC Max 15mA  |   |  |
| Contact measuring current   | 15mA   |   |  |
| Common characteristics  |  |   |  |
| Close contact resistance  | Max 1kΩ  |   |  |
| Open contact resistance   | Min 100kΩ  |   |  |
| Insulation  | see "Insulation between<br>inputs and outputs" table   |   |  |
| <b>Accuracy</b> (display, RS232, RS485)   | In: 5A, I <sub>f.s.</sub> : 10A<br>Un: see voltage ranges below<br>from 0.05In to I <sub>max</sub> :<br>±(0.2%RDG+2DGT)<br>from 0.01In to 0.05In:<br>±(0.5%RDG+2DGT)   |   |  |
| Current (A <sub>L1</sub> , A <sub>L2</sub> , A <sub>L3</sub> )<br>(@20°C ± 5°C, R.H. ≤ 75%) | ±0.5% RDG (0.2 to 2 In)<br>@ 40 to 100 Hz  |   |  |
| Current (A <sub>n</sub> )   |  |   |  |
| Voltage (@20°C±5°C,R.H.≤75%)<br>range AV5:  | 400/690V <sub>L-L</sub> AC<br>V <sub>L-N</sub> : 185 V to 460 V<br>V <sub>L-L</sub> : 320 V to 800 V<br>±(0.2%RDG+1DGT)  |   |  |
| range AV6:  | 120/208V <sub>L-L</sub> AC<br>V <sub>L-N</sub> : 45 V to 145 V<br>V <sub>L-L</sub> : 78 V to 250 V<br>±(0.2%RDG+1DGT)<br>Includes also:<br>frequency, power supply<br>and output load influences                           |   |  |
| Frequency   | ±0.1% RDG (40 to 440 Hz)   |   |  |
| Active power and<br>apparent power<br>(@ 20°C ± 5°C, R.H. ≤ 75%)                            | 0.05In to I <sub>max</sub> , PF 1:<br>±(0.5%RDG+1DGT)<br>0.01In to 0.05In, PF 1:<br>±(1%RDG+1DGT)<br>0.1In to I <sub>max</sub> , PF0.5L, PF 0.8C:<br>±(0.6%RDG+1DGT)<br>0.02In to 0.1In, PF0.5L, PF 0.8C:<br>±(1%RDG+1DGT) |   |  |
| Reactive power<br>(@ 20°C ± 5°C, R.H. ≤ 75%)  | 0.1In to I <sub>max</sub> ,<br>senφ 0.5L/C: ±(2%RDG+1DGT)<br>0.05In to 0.1In, senφ 0.5L/C:<br>±(2.5%RDG+1DGT)<br>0.05In to I <sub>max</sub> ,<br>senφ 1: ±(2%RDG+1DGT)<br>0.02In to 0.05In,<br>senφ 1: ±(2.5%RDG+1DGT)     |   |  |
|   |  | Temperature drift                                 | ≤200ppm/°C (AV), ≤300ppm/°C<br>(all the other measurements)  |
|   |  | Sampling rate                                     | 6400 samples/s @ 50Hz<br>7680 samples/s @ 60Hz   |
|   |  | Measurement format                                | (serial communication)<br>IEEE-754 32-bit floating point<br>Unsigned 64bit (minimum<br>resolution 1Wh)   |
|   |  | Measurements                                      | Current, voltage, power,<br>energy, power factor, frequen-<br>cy, harmonic distortion (see<br>"list of the variables that...").<br>TRMS measurement of a<br>distorted wave (voltage/cur-<br>rent).   |
|   |  | Coupling type                                     | Direct.  |
|   |  | Crest factor                                      | < 3, max 10A peak  |
|   |  | Input impedance                                   | 400/690V <sub>L-L</sub> (AV5)<br>120/208V <sub>L-L</sub> (AV6)<br>Current<br>1.77 MΩ ±5%<br>885 kΩ ±5%<br>≤ 0.01Ω  |
|   |  | Frequency   | 40 to 440 Hz   |
|   |  | Overload protection                               | (max values)<br>AV5: 460V <sub>L-N</sub> , 800V <sub>LL</sub> /10A<br>AV6: 145V <sub>L-N</sub> , 250V <sub>LL</sub> /10A<br>AV5: 800V <sub>L-N</sub> , 1380V <sub>LL</sub> /36A<br>AV6: 240V <sub>L-N</sub> , 416V <sub>LL</sub> /36A  |
|   |  | Continuous voltage/current                        |  |
|   |  | For 500ms: voltage/current                        |  |

## Output specifications

|  |   |   |   |
|--|---|---|---|
| <b>Analogue Outputs (on request)</b><br>Number of outputs<br><br>Accuracy (@ 25°C ±5°C, R.H. ≤60%)<br><br>Range<br><br>Scaling factor:<br><br><br><br><br><br>Response time<br><br>Ripple<br><br>Total temperature drift<br>Load: 20 mADC<br>10 VDC<br>±5 mA<br>Insulation | Up to 8 (max 4 x 20mA +<br>4 x 10VDC or 4 x 20mA +<br>4 x ±5mA or 8 x 10VDC or<br>8 x ±5mA)<br>±0.1%FS (20mA or 10VDC)<br>±0.3%FS (±5mA), FS=10mA<br>0 to 20mA or 0 to 10 VDC<br>or ±5mA<br>Programmable within the<br>whole range of retransmis-<br>sion; it allows the retrans-<br>mission management of all<br>values from: 0 and<br>20 mA, 0 and 10VDC,<br>or -5mA and +5mA<br>≤ 400 ms typical<br>(filter excluded)<br>≤ 1% (according to<br>IEC 60688-1, EN 60688-1)<br>≤ 500 ppm/°C<br>≤ 350 Ω<br>≥ 10kΩ<br>≤ 1400Ω<br>see "Insulation between<br>inputs and outputs" table  | <b>Ethernet/Internet port</b><br>Protocols<br>IP configuration<br>TCP port<br>Client connections<br>Connections   | Modbus TCP<br>Static IP<br>Selectable (default 502)<br>Max 5 simultaneously<br>RJ45 10/100 BaseTX   |
| <b>RS422/RS485 port<br/>(on request)</b><br><br>Connections<br><br>Addresses<br>Protocol<br>Data (bidirectional)<br>Dynamic (reading only)<br><br>Static (writing only)<br><br>Data format<br><br>Baud-rate<br><br>Insulation  | Multidrop<br>bidirectional (static and<br>dynamic variables)<br>2 or 4 wires, max. distance<br>1000m, termination directly<br>on the module<br>1 to 237, selectable by PqTHSoft<br>MODBUS RTU /JBUS,<br><br>See the table, "List of the<br>variables that can be<br>connected to"...<br>All configuration parameters,<br>reset of energy, activation of<br>digital output<br>Stored energy (EEPROM)<br>max. 999.999.999 kWh/kvarh<br>1-start bit, 8-data bit, no<br>parity/even parity,<br>odd parity, 1 stop bit<br>9.6k, 19.2k, 38.4k, 115.2k bit/s<br>selectable bauds<br>see "Insulation between<br>inputs and outputs" table | <b>Digital outputs (on request)</b><br>Pulse type<br>Number of outputs<br>Type<br><br>Pulse duration<br><br><br><br><br><br>Alarm type<br>Number of outputs<br>Alarm modes<br><br><br><br><br><br>Set-point adjustment<br><br>Hysteresis<br>On-time delay<br>Output status<br><br><br>Min. response time<br><br><b>Note</b> | Up to 16<br>Programmable from 0.001 to<br>1000 pulses per kWh/kvarh<br>(total and partial)<br>Outputs connectable to the<br>total and/or partial energy<br>meters (Wh/varh)<br>≥ 100ms, < 120msec (ON),<br>≥ 100ms (OFF)<br>according to EN62053-31<br><br>up to 16, independent<br>Up alarm, down alarm, in<br>window alarm, out window<br>alarm. All of them can be<br>used with start up deactiva-<br>tion function and/or latch.<br>All the alarms can be con-<br>nected to all variables (see<br>the table "List of the vari-<br>ables that can be connected<br>to").<br>from 0 to 100% of the<br>electrical scale<br>from 0 to full scale<br>0 to 255s<br>Selectable; normally<br>de-energised and normally<br>energised<br>≤200ms, filters excluded,<br>Set-point on-time delay: "0s"<br>The 16 digital outputs<br>can also work as<br>combination of pulse<br>outputs and alarm<br>outputs. |
| <b>RS232 output (on request)</b><br><br>Connections<br>Data format<br><br><br>Baud-rate<br>Protocol<br>Other data  | Bidirectional (static and<br>dynamic variables)<br>3 wires, max. distance 15m,<br>1-start bit, 8-data bit,<br>no parity, even parity,<br>odd parity, 1 stop bit<br>9.6k bit/s<br>MODBUS RTU /JBUS<br>as for RS422/485   | <b>Static (digital) outputs</b><br>Purpose<br><br>Signal<br><br>Insulation<br><br><br><b>Relay (digital) outputs</b><br>Purpose<br><br>Output type<br><br><br>Insulation  | <b>(on request)</b><br>For pulse outputs or for<br>alarm outputs<br>V <sub>ON</sub> 1.2 VDC/ max. 100 mA<br>V <sub>OFF</sub> 30 VDC max.<br>see "Insulation between<br>inputs and outputs" table<br><br><b>(on request)</b><br>For alarm outputs or for pulse<br>outputs<br>Relay SPDT<br>AC 1-8A, 250VAC<br>DC 12-5A, 24VDC<br>AC 15-2.5A, 250VAC<br>DC 13-2.5A, 24VDC<br>see "Insulation between<br>inputs and outputs" table   |

## Software functions

|   |   |   |  |
|---|---|---|--|
| <p><b>Password</b></p> <p>1st level<br/>2nd level</p>   | <p>Numeric code of max 4 digits from 0 to 1000;<br/>2 protection levels of the programming data<br/>Password "0": no protection<br/>Password from 1 to 1000: all data are protected.</p>  | <p><b>Reset</b></p>   | <p>By means of PqtHSoft (configuration software) it is possible to reset the following data:</p> <ul style="list-style-type: none"> <li>- all the min, max, dmd, dmd-max values.</li> <li>- total and partial counters.</li> <li>- latch alarms.</li> <li>- all the events.</li> </ul> |
| <p><b>System selection</b></p> <p>System 1<br/>System 2, unbalanced<br/>System 3, balanced<br/>System 3, unbalanced</p> | <p>1-phase (2 wires)<br/>2-phase (3 wire)<br/>3-phase (3 wires+1CT)<br/>3-phase (3 wires)<br/>3-phase (4 wires)</p>   | <p><b>Data stamping</b></p> <p>Type of data</p>                         | <p>Alarm, min, max, digital input status, digital output status as remote control, resets. All events are stored with date (dd:mm:yy) and hour (hh:mm:ss) reference</p>  |
| <p><b>Transformer ratio</b></p>   | <p>CT up to 60 kA (6000 max)<br/>VT (PT) up to 600 kV (6000 max)</p>  | <p>Number of events<br/>Data management type:<br/>Data storage type</p> | <p>Up to 10,000<br/>FIFO<br/>Data flash</p>  |
| <p><b>Filters</b></p> <p>Filter operating range<br/><br/>Filtering coefficient<br/>Filter action</p>                    | <p>0.1 to 100% of the input electrical scale.<br/>1 to 255<br/>Alarms, serial outputs (fundamental variables: V, A, W and their derived ones).</p>  |   |  |
| <p><b>Alarms</b></p> <p>Working mode</p>  | <p>"OR" or "AND" or "OR+AND" functions (see "Alarm parameter and logic" page).<br/>Freely programmable on up to 16 alarms. The alarms can be connected to any variables available in the table "List of the variables that can be connected to"</p> |   |  |

## PqtHSoft parameter programming and variable reading software

|  |  |                                       |   |
|--|--|---------------------------------------|---|
| <p><b>PqtHSoft</b></p> <p>Working mode</p> | <p>Multi-language software (Italian, English, France, German, Spanish) for variable reading, instrument calibration and parameters programming. The program runs under Windows /98/98SE/2000/NT/XP. Two different working modes can be selected:</p> | <p>Data Storing<br/>Data Transfer</p> | <ul style="list-style-type: none"> <li>- management of local RS232 (MODBUS);</li> <li>- management of a local RS485 network (MODBUS);</li> <li>In pre-formatted XLS files (Excel data base).</li> <li>Manual or automatic at programmable timings.</li> </ul> |
|--|--|---------------------------------------|---|



## Time period management

| Meters                    |  | Energy Meters         |   |
|---------------------------|--|-----------------------|---|
| Total                     | 4 (9-digit)  | Total energy meters   | 4 (+kWh, +kvarh, -kWh, -kvarh)<br>It is possible divide each energy meter here above listed in 3 additional energy meters (1 for each phase "L1-L2-L3")<br>48 (for energy meters for each month "+kWh, +kvarh, -kWh, -kvarh")<br>16 (using digital inputs: max 4 tariffs).<br>48 (using the internal clock: max 12 tariffs) |
| Partial and multitariff   | 48 (9-digit)   | Monthly energy meters |   |
| Tariffs                   | Up to 12   | Partial energy meters |   |
| Time periods              |  |                       |   |
| Number of periods         | Up to 24 per day<br>Up to 100 different days per year  |                       |   |
| Pulse output              | Connectable to total and/or partial meters (multitariff)   |                       |   |
| Energy metering recording | Consumption history by recording of the monthly energy meters (12 previous months). Recording of total and partial energy meters.<br>Energy meter recording (EEPROM)<br>Max. 999,999,999kWh/kvarh. |                       |   |

## Harmonic distortion analysis

|                      |  |                  |  |
|----------------------|--|------------------|--|
| Analysis principle   | FFT  |                  |  |
| Harmonic measurement |  |                  | possible to know if the distortion is absorbed or generated.<br>Note: if the system has 3 wires the angle cannot be measured.  |
| Current              | Up to the 63 <sup>rd</sup> harmonic  |                  |  |
| Voltage              | Up to the 63 <sup>rd</sup> harmonic  |                  |  |
| Type of harmonics    | THD (VL1 and VL1-N)<br>THD odd (VL1 and VL1-N)<br>THD even (VL1 and VL1-N)<br>The same for the other phases: L2, L3.<br>THD (AL1)<br>THD odd (AL1)<br>THD even (AL1)<br>The same for the other phases: L2, L3. | Harmonic details | The harmonic contents is given as a numerical information:<br>THD % / RMS value<br>THD even % / RMS value<br>THD odd% / RMS value<br>single harmonics in % / RMS value |
| Harmonic phase angle | The instrument measures the angle between the single harmonic of "V" and the single harmonic of "I" of the same order. According to the value of the electrical angle, it is                                   | System           | The harmonic distortion can be measured in single-phase, 3-wire or 4-wire systems.<br>Tw: 0.02 sec@50Hz without filter   |





## General Specifications


|                                       |   |                                 |   |
|---------------------------------------|---|---------------------------------|---|
| <b>Operating temperature</b>          | -10 to +45°C (14 to 113°F)<br>(R.H. < 90% non-condensing)                       | <b>Immunity</b>                 | EN61000-6-2<br>industrial environment.<br>ANSI/IEEE C37.90-1989<br>(surge, withstand and fast transient test) |
| <b>Limit range of operating temp.</b> | -20 to +55°C (-4 to 131°F)<br>(R.H. < 90% non-condensing)                       | <b>Pulse voltage (1.2/50µs)</b> | EN61000-4-5   |
| <b>Storage temperature</b>            | -30 to +60°C (-4 to 140°F)<br>(R.H. < 90% non-condensing)                       | <b>Safety standards</b>         | IEC60664, IEC61010-1<br>EN60664, EN61010-1  |
| <b>Installation category</b>          | III   | <b>Measurement standards</b>    | IEC60688, EN60688,<br>EN62053-22, EN62053-23,<br>ANSI C12.20, ANSI C12.1                                      |
| <b>Pollution degree</b>               | 2   | <b>Approvals</b>                | CE, cURus and CSA   |
| <b>Altitude</b>                       | up to 2000m (6560 feet) above<br>sea-level                                      | <b>Connections 5(6) A</b>       | Screw-type<br>max. 2.5 mm <sup>2</sup> wires (2x 1.5mm <sup>2</sup> )   |
| <b>Insulation reference voltage</b>   | 300 V <sub>RMS</sub> to ground (AV5 input)                                      | <b>Housing</b>                  |   |
| <b>Dielectric strength</b>            | 4kVAC <sub>RMS</sub> (for 1 min)  | Dimensions                      | 90x90x140 mm  |
| <b>Noise Rejection</b>                |   | Material                        | ABS,<br>self-extinguishing: UL 94 V-0   |
| <b>CMRR</b>                           | 100 dB, 48 to 62 Hz   | <b>Protection degree</b>        | IP20  |
| <b>EMC</b>                            |   | <b>Weight</b>                   | Approx. 600 g<br>(packing included)   |
| Emissions                             | EN61000-6-3, EN60688<br>residential environment,<br>commerce and light industry |                                 |   |

## Supply specifications

|                      |   |                          |   |
|----------------------|---|--------------------------|---|
| <b>AC/DC voltage</b> | 90 to 260V (standard)<br>18 to 60V (on request) | <b>Power consumption</b> | ≤ 30VA/12W (90 to 260V)<br>≤ 20VA/12W (18 to 60V) |
|----------------------|---|--------------------------|---|

## Revenue approval settings

- The access to the programming parameters via serial communication ports is locked.
- A proper "instrument settings" form must be filled up by the user before equipment supplying.
- PQT-H is supplied with the desired modules plugged and sealed in the proper slots.
- PQT-H fulfils:
  - the ANSI/IEEE C12.20-1998 requirements;
  - the CAN3-C17-M84 requirements;
 and can be certified according to:
  - C12.20-1998, class 0.5 (independent labs);
  - AE-0924 Industry Canada Approval.

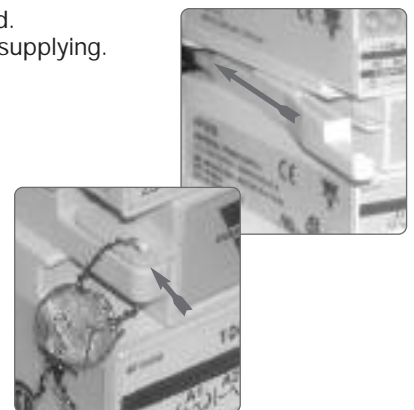


## Alarm parameters and logic




- Block enable.
  - Controlled variable (VLN, ...).
  - Alarm type (up, down, window int, window ext).
  - Activation function.
  - Latch
- SET 1.
  - SET 2.
  - ON delay.
  - OFF delay
  - Logical function (AND, OR).
  - Digital output (1 to 16).

} **A, B, C... up to 16**  
parameter control blocks.

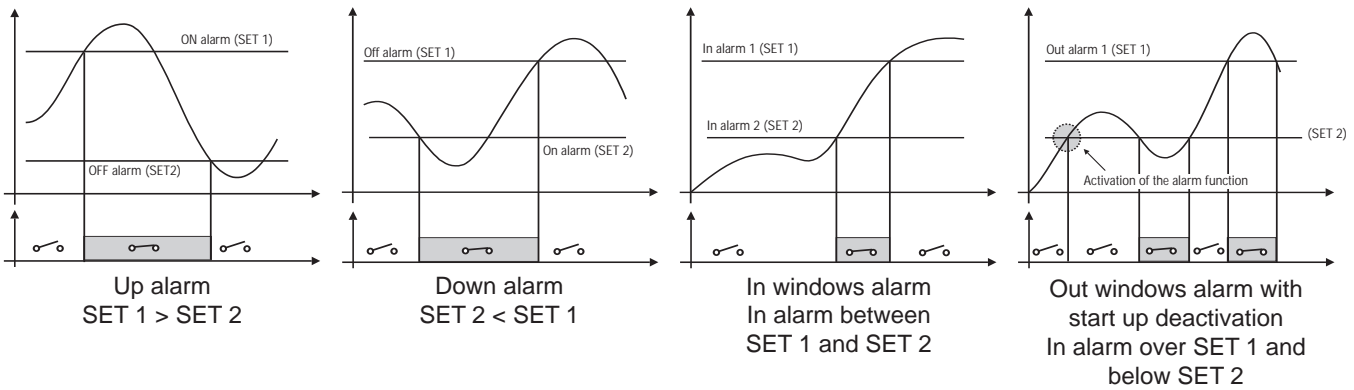

**Note:** any alarm working mode can be linked to the "Activation" function which disables only the first alarm after power on of the transducer. All the alarms can be used with the latch function.

### AND/OR logical alarm examples:

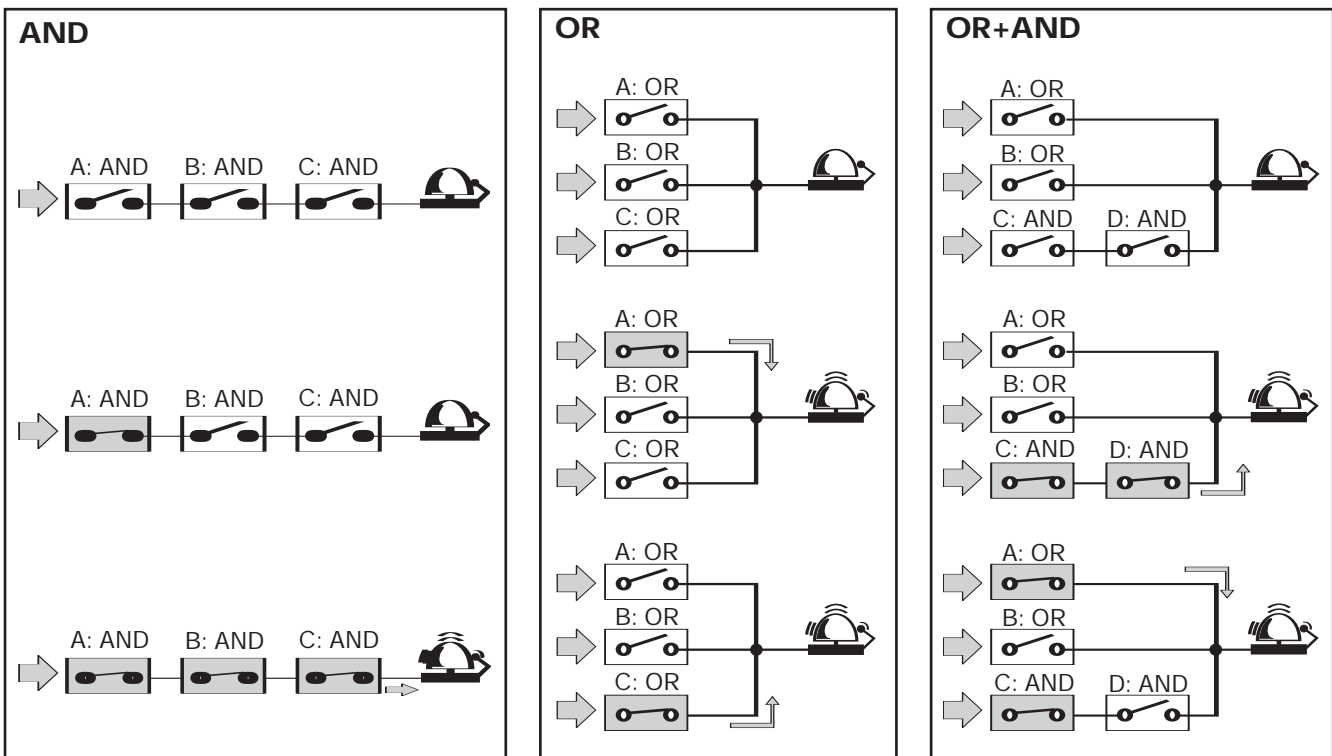




## Function Description

**Input and output scaling capability.** Working of the analogue outputs (y) versus input variables (x)


**Figure A**

The sign of measured quantity and output quantity remains the same. The output quantity is proportional to the measured quantity.




**Figure D**

The sign of measured quantity and output quantity remains the same. With the measured quantity being zero, the output quantity already has the value  $Y1 = 0.2 Y2$ . Live zero output.




**Figure B**

The sign of measured quantity and output quantity changes simultaneously. The output quantity is proportional to the measured quantity.




**Figure E**

The sign of the measured quantity changes but the one of the output quantity remains the same. The output quantity steadily increases from value X1 to value X2 of the measured quantity.




**Figure C**

The sign of measured quantity and output quantity remains the same. On the range X0...X1, the output quantity is zero. The range X1...X2 is delineated on the entire output range  $Y0 = Y1...Y2$  and thus presented in strongly expanded form.



**Figure F**

The sign of the measured quantity remains the same, the one of the output quantity changes as the measured quantity leaves range X0...X1 and passes to range X1...X2 and vice versa.



## Insulation between inputs and outputs

|                         | Meas. /digital inputs | Relay output | Open collector output | Analogue out. 10V, 20mA | Analogue out. ±5mA | AR1034 | AR2040 | AR1039 | Power Supply 90-260VAC/DC | Power Supply 18-60VAC/DC |
|-------------------------|-----------------------|--------------|-----------------------|-------------------------|--------------------|--------|--------|--------|---------------------------|--------------------------|
| Meas. /digital inputs   | -                     | 4kV          | 4kV                   | 2kV                     | 2kV                | 4kV    | 2kV    | 4kV    | 4kV                       | 4kV                      |
| Relay output            | 4kV                   | 4kV (*)      | 4kV                   | 4kV                     | 4kV                | 4kV    | 4kV    | 4kV    | 4kV                       | 4kV                      |
| Open coll.out.          | 4kV                   | 4kV          | 4kV (*)               | 4kV                     | 4kV                | 4kV    | 4kV    | 4kV    | 4kV                       | 4kV                      |
| Analogue out. 10V, 20mA | 2kV                   | 4kV          | 4kV                   | 4kV (*)                 | 4kV                | 4kV    | 4kV    | 4kV    | 4kV                       | 4kV                      |
| Analogue out. ±5mA      | 2kV                   | 4kV          | 4kV                   | 4kV                     | 200V (**)          | 4kV    | 4kV    | 4kV    | 4kV                       | 4kV                      |
| AR1034                  | 4kV                   | 4kV          | 4kV                   | 4kV                     | 4kV                | -      | -      | 4kV    | 4kV                       | 4kV                      |
| AR2040                  | 2kV                   | 4kV          | 4kV                   | 4kV                     | 4kV                | -      | -      | 4kV    | 4kV                       | 4kV                      |
| AR1039                  | 4kV                   | 4kV          | 4kV                   | 4kV                     | 4kV                | 4kV    | 4kV    | -      | 4kV                       | 4kV                      |
| 90-260VAC/DC            | 4kV                   | 4kV          | 4kV                   | 4kV                     | 4kV                | 4kV    | 4kV    | 4kV    | -                         | -                        |
| 18-60VAC/DC             | 4kV                   | 4kV          | 4kV                   | 4kV                     | 4kV                | 4kV    | 4kV    | 4kV    | -                         | -                        |

**NOTE:** In case of fault of first insulation the current from the measuring inputs to the ground is lower than 2 mA.

(\*) The given insulation is granted among outputs plugged in different slots. The modules equipped with two or four outputs have therefore non insulation among the outputs. (\*\*) Insulation between the 2 outputs of the same module is 200V for 1 min.




## Digital outputs important note

| Code   | Description          | Slot A      | Slot B      | Slot C      | Slot D      |
|--------|----------------------|-------------|-------------|-------------|-------------|
| AO1058 | 1 relay output       | A0          | B0          | C0          | D0          |
| AO1059 | 1 open coll. output  | A0          | B0          | C0          | D0          |
| AO1035 | 2 relay outputs      | A0 A1       | B0 B1       | C0 C1       | D0 D1       |
| AO1036 | 2 open coll. outputs | A0 A1       | B0 B1       | C0 C1       | D0 D1       |
| AO1037 | 4 open coll. outputs | A1 A2 A3 A4 | B1 B2 B3 B4 | C1 C2 C3 C4 | D1 D2 D3 D4 |


The grey-marked digital outputs are activated for a while during the instrument start-up, therefore they are not suggested for pulse output purpose.

## Accuracy

kWh, accuracy (RDG) depending on the current

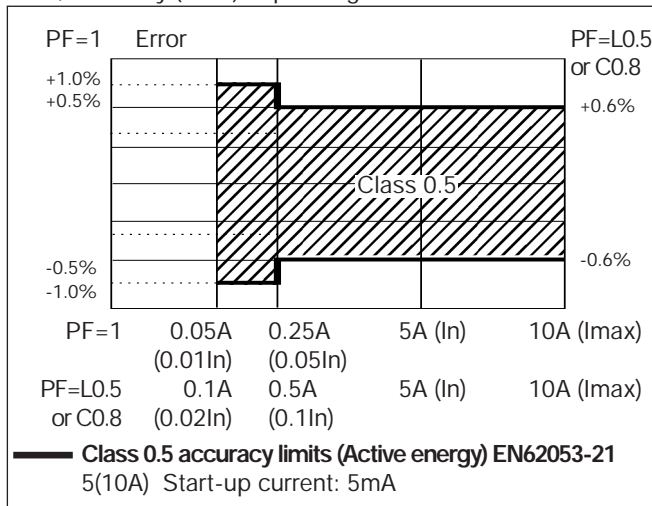

kvarh, accuracy (RDG) depending on the current

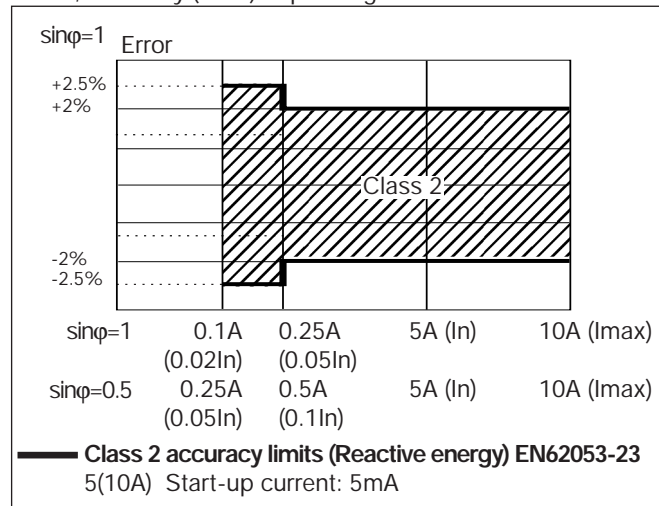

## Used calculation formulas

### Phase variables

Instantaneous effective voltage

$$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_{IN})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_1^n (V_{IN})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{IN} \cdot A_1$$

Instantaneous reactive power

$$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

### System variables

Equivalent three-phase voltage

$$V_{\Sigma} = \frac{V_{12} + V_{23} + V_{31}}{3}$$

Voltage asymmetry

$$ASY_{LL} = \frac{(V_{LL\max} - V_{LL\min})}{V_{LL\Sigma}}$$

$$ASY_{LN} = \frac{(V_{LN\max} - V_{LN\min})}{V_{LN\Sigma}}$$

Three-phase reactive power

$$VAR_{\Sigma} = (VAR_1 + VAR_2 + VAR_3)$$

Neutral current

$$An = \overline{A}_{L1} + \overline{A}_{L2} + \overline{A}_{L3}$$

Three-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + VAR_{\Sigma}^2}$$

Three-phase power factor

$$\cos\phi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}} \quad (TPF)$$

### Energy metering

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} P_{i,n}$$

$$kVarh_i = \int_{t_1}^{t_2} Q_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} Q_{i,n}$$

Where:

i= considered phase (L1, L2 or L3)  
P= active power; Q= reactive power;  
t<sub>1</sub>, t<sub>2</sub> = starting and ending time points of consumption recording; n= time unit; Δt= time interval between two successive power measurements;  
n<sub>1</sub>, n<sub>2</sub> = starting and ending discrete time points of power recording

## List of the variables that can be connected to:




Analogue outputs (all listed variables with the only exception of energies), alarm outputs (all listed variables with the only exception of energies), pulse outputs (only energies), communication (all listed variables).

| No | Variable   | 1-phase system | 2-ph. 3-wire system | 3-ph. 4-wire bal. (1 CT) | 3-ph. 3-wire unbal. sys. | 3-ph. 4-wire unbal. sys. | Notes                      |
|----|------------|----------------|---------------------|--------------------------|--------------------------|--------------------------|----------------------------|
| 1  | V L1       | x              | x                   | x                        | o                        | x                        |                            |
| 2  | V L2       | o              | x                   | x                        | o                        | x                        |                            |
| 3  | V L3       | o              | o                   | x                        | o                        | x                        |                            |
| 4  | V L-N sys  | o              | x                   | x                        | o                        | x                        | Sys = system = $\Sigma$    |
| 5  | V L1-2     | o              | x                   | x                        | x                        | x                        |                            |
| 6  | V L2-3     | o              | o                   | x                        | x                        | x                        |                            |
| 7  | V L3-1     | o              | o                   | x                        | x                        | x                        |                            |
| 8  | V L-L sys  | o              | o                   | x                        | x                        | x                        | Sys = system = $\Sigma$    |
| 9  | A L1       | x              | x                   | x                        | x                        | x                        |                            |
| 10 | A L2       | o              | x                   | x                        | x                        | x                        |                            |
| 11 | A L3       | o              | o                   | x                        | x                        | x                        |                            |
| 12 | An         | o              | x                   | x                        | o                        | x                        | An=neutral current         |
| 13 | W L1       | x              | x                   | x                        | x                        | x                        |                            |
| 14 | W L2       | o              | x                   | x                        | x                        | x                        |                            |
| 15 | W L3       | o              | o                   | x                        | x                        | x                        |                            |
| 16 | W sys      | o              | x                   | x                        | x                        | x                        |                            |
| 17 | var L1     | x              | x                   | x                        | x                        | x                        |                            |
| 18 | var L2     | o              | x                   | x                        | x                        | x                        |                            |
| 19 | var L3     | o              | o                   | x                        | x                        | x                        |                            |
| 20 | var sys    | o              | x                   | x                        | x                        | x                        | Sys = system = $\Sigma$    |
| 21 | VA L1      | x              | x                   | x                        | x                        | x                        |                            |
| 22 | VA L2      | o              | x                   | x                        | x                        | x                        |                            |
| 23 | VA L3      | o              | o                   | x                        | x                        | x                        |                            |
| 24 | VA sys     | o              | x                   | x                        | x                        | x                        | Sys = system = $\Sigma$    |
| 25 | PF L1      | x              | x                   | x                        | x                        | x                        |                            |
| 26 | PF L2      | o              | x                   | x                        | x                        | x                        |                            |
| 27 | PF L3      | o              | o                   | x                        | x                        | x                        |                            |
| 28 | PF sys     | o              | x                   | x                        | x                        | x                        | Sys = system = $\Sigma$    |
| 29 | Hz         | x              | x                   | x                        | x                        | x                        |                            |
| 30 | ASY VL-N   | o              | x                   | x                        | o                        | x                        | Asymmetry of phase-neutral |
| 31 | ASY VL-L   | o              | o                   | x                        | x                        | x                        | Asymmetry of phase-phase   |
| 32 | THD V1     | x              | x                   | x                        | o                        | x                        |                            |
| 33 | THD V2     | o              | x                   | x                        | o                        | x                        |                            |
| 34 | THD V3     | o              | o                   | x                        | o                        | x                        |                            |
| 35 | THD V1-2   | o              | x                   | x                        | x                        | x                        |                            |
| 36 | THD V2-3   | o              | o                   | x                        | x                        | x                        |                            |
| 37 | THD V3-1   | o              | o                   | x                        | x                        | x                        |                            |
| 38 | THD A1     | x              | x                   | x                        | x                        | x                        |                            |
| 39 | THD A2     | o              | x                   | x                        | x                        | x                        |                            |
| 40 | THD A3     | o              | o                   | x                        | x                        | x                        |                            |
| 41 | THDo V1    | x              | x                   | x                        | o                        | x                        |                            |
| 42 | THDo V2    | o              | x                   | x                        | o                        | x                        |                            |
| 43 | THDo V3    | o              | o                   | x                        | o                        | x                        |                            |
| 44 | THDo V1-2  | o              | x                   | x                        | x                        | x                        |                            |
| 45 | THDo V2-3  | o              | o                   | x                        | x                        | x                        |                            |
| 46 | THDo V3-1  | o              | o                   | x                        | x                        | x                        |                            |
| 47 | THDo A1    | x              | x                   | x                        | x                        | x                        |                            |
| 48 | THDo A2    | o              | x                   | x                        | x                        | x                        |                            |
| 49 | THDo A3    | o              | o                   | x                        | x                        | x                        |                            |
| 50 | THDe V1    | x              | x                   | x                        | o                        | x                        |                            |
| 51 | THDe V2    | o              | x                   | x                        | o                        | x                        |                            |
| 52 | THDe V3    | o              | o                   | x                        | o                        | x                        |                            |
| 53 | THDe V1-2  | o              | x                   | x                        | x                        | x                        |                            |
| 54 | THDe V2-3  | o              | o                   | x                        | x                        | x                        |                            |
| 55 | THDe V3-1  | o              | o                   | x                        | x                        | x                        |                            |
| 56 | THDe A1    | x              | x                   | x                        | x                        | x                        |                            |
| 57 | THDe A2    | o              | x                   | x                        | x                        | x                        |                            |
| 58 | THDe A3    | o              | o                   | x                        | x                        | x                        |                            |
| 59 | Phase seq. | o              | o                   | x                        | x                        | x                        | Phase sequence             |




(x) = available (o) = not available

## Wiring diagrams




### 1-phase, 2-wire input connections (1P)

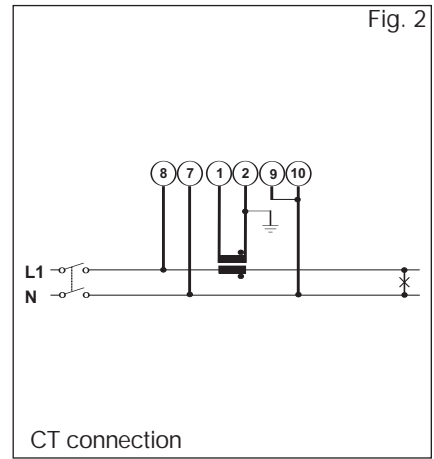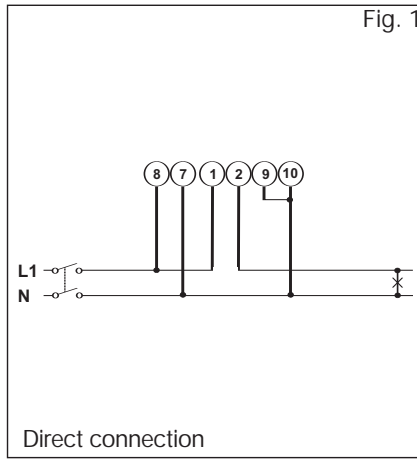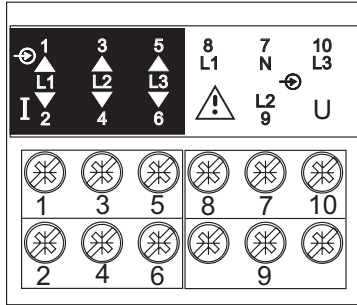

### 2-phase, 3-wire input connections (2P)

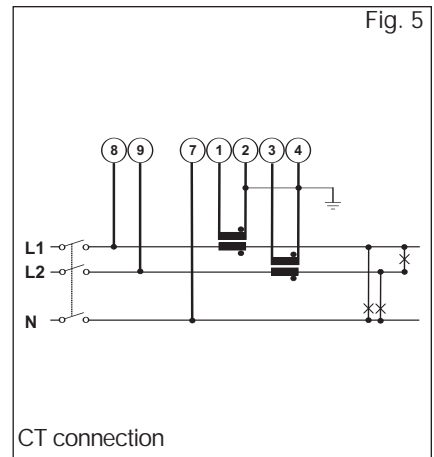
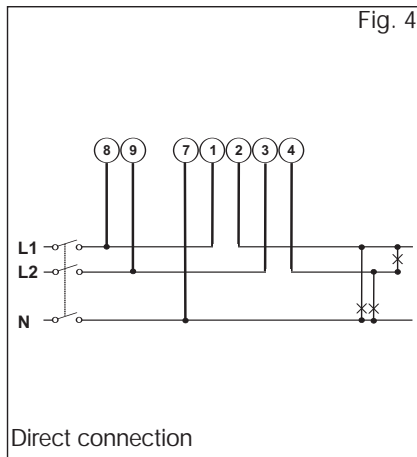
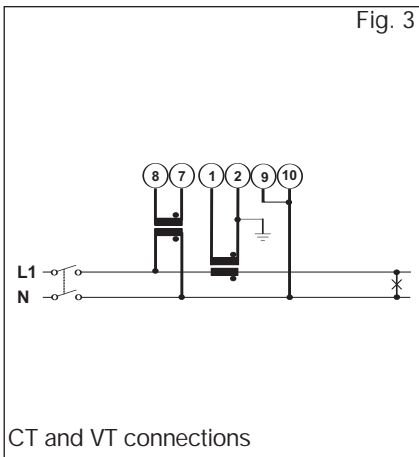


### 3-phase, 3 and 4-wire input connections - Balanced load (3P-1CT)

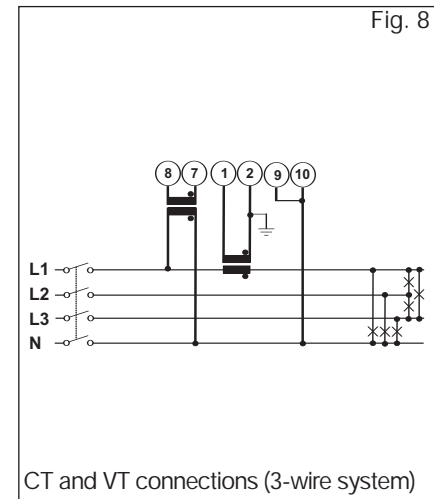
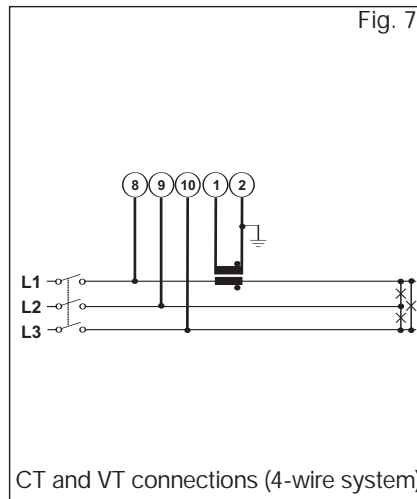
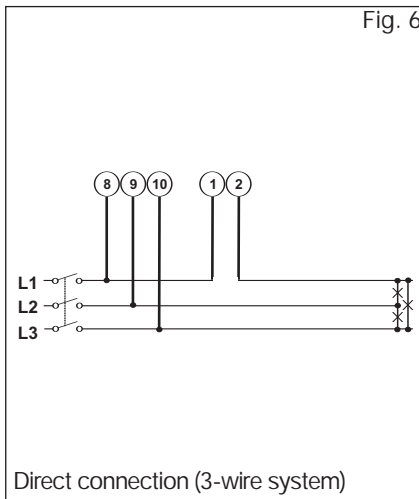


## Wiring diagrams (cont.)




### 3-phase, 3-wire input connections - Unbalanced load (3P)

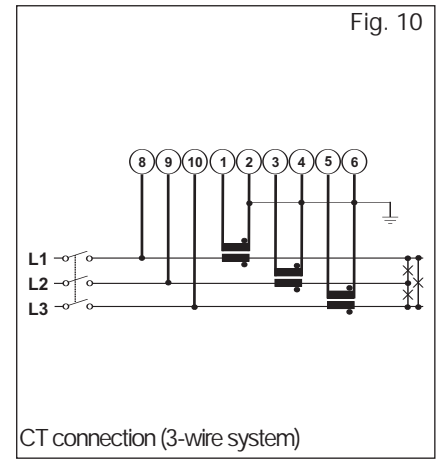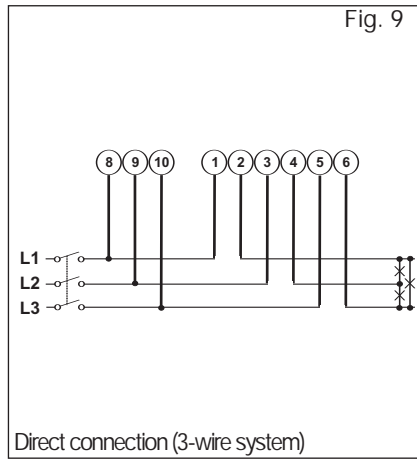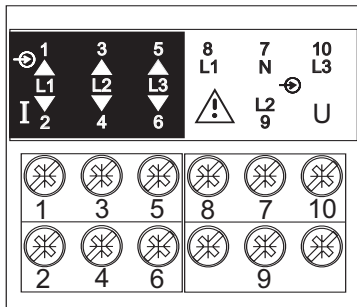


### 3-phase, 3-wire input connections ARON (3P)

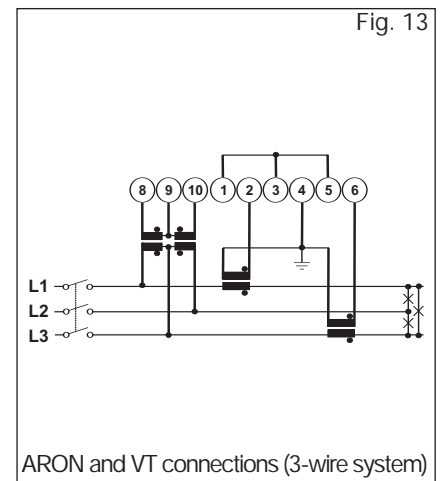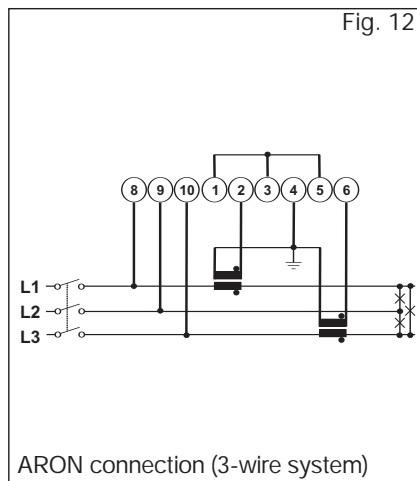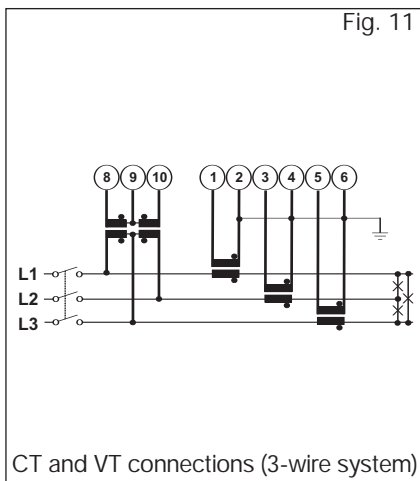


### 3-phase, 3 and 4 wires input connections - Unbalanced load (3p+N)

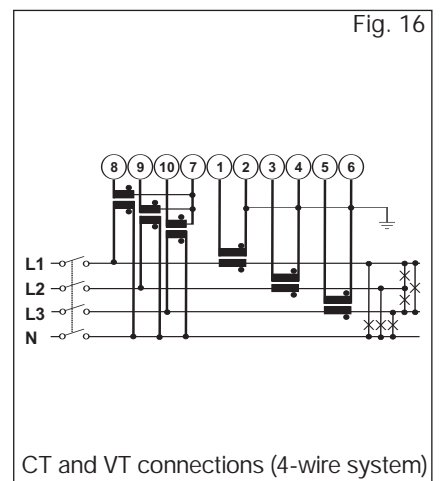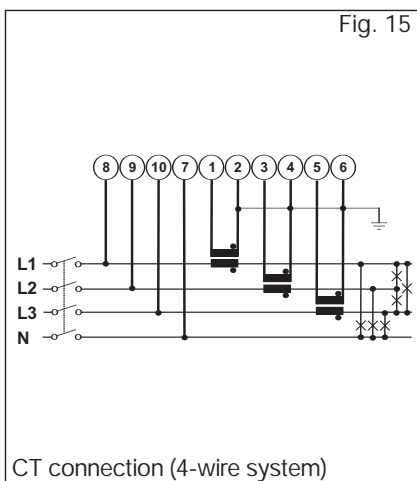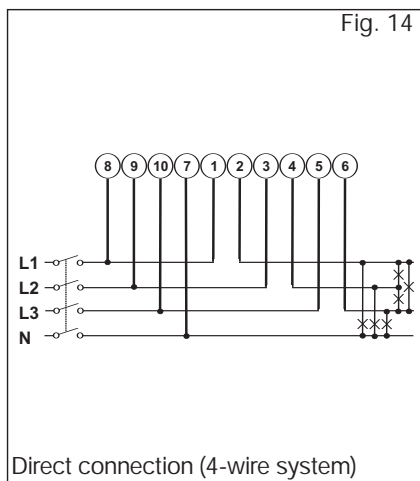


## Wiring diagrams (optional modules)




**AO2050**  
2 analogue outputs (0-20mA)




**AO2052**  
2 analogue outputs (+/-5mA)




**AO1051**  
2 analogue outputs (10V)

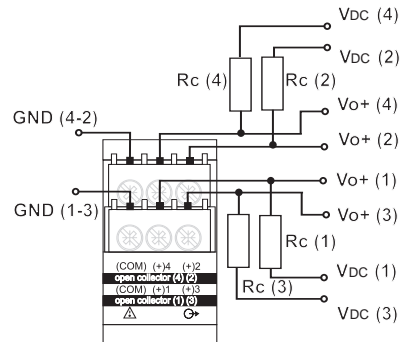


**AO1037** 4-open collector output connection:  
This wiring diagram is valid also for the open collector module with one or two outputs. The load resistances (Rc) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.




**AO1058**  
1 relay output



**AO1035**  
2 relay outputs

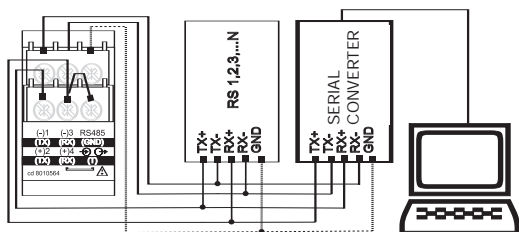





**AR1034/AR2040**  
4-wire connection of RS485 serial port

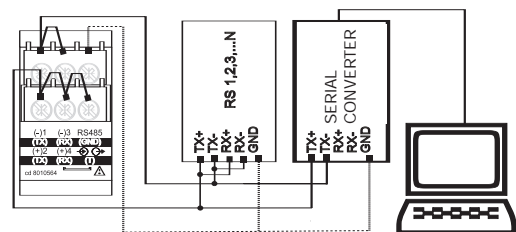


**AR1034/AR2040**  
2-wire connection of RS485 serial port

**RS422/485 NOTE:** additional devices provided with RS422/485 (that is RS 1, 2, 3...N) are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (RX+) and (T).

## Wiring diagrams: digital input modules

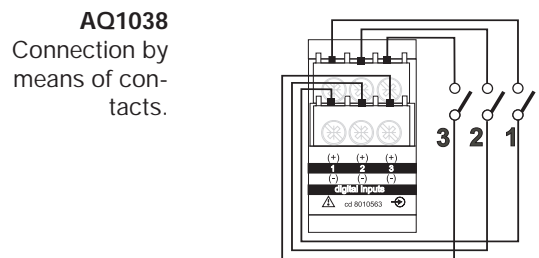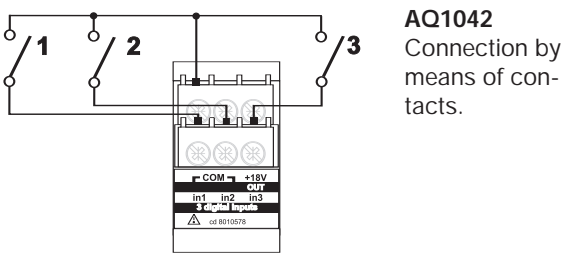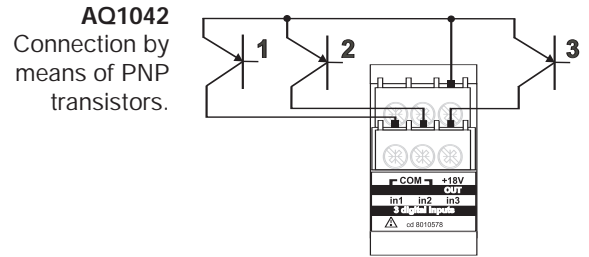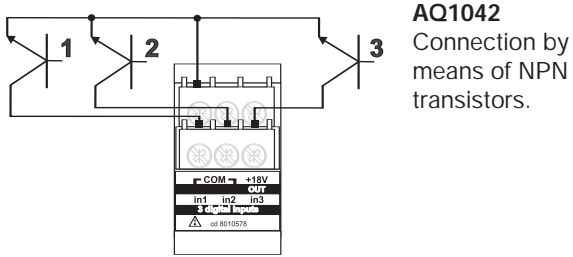


## Dimensions

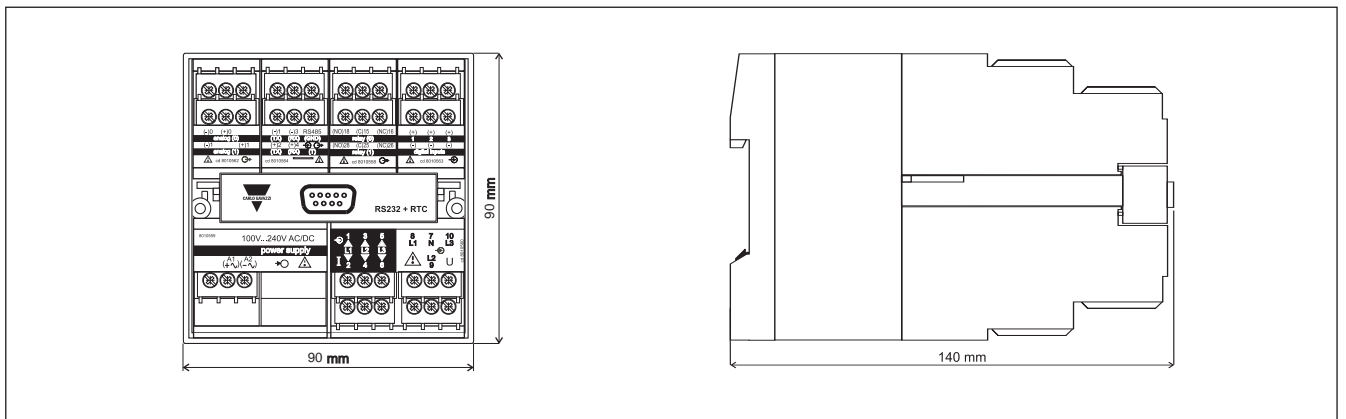




## Modules

### Dual analogue output modules




**AO2050** (20mADC)  
**AO2051** (10VDC)




**AO2052** (+/-5mADC)


### Digital output modules




**AO1058**  
Single relay output



**AO1035**  
Dual relay output




**AO1059**  
Single open collector output




**AO1036**  
Dual open collector output


### Other input/output modules




**AO1037**  
4 open collector outputs



**AO1038**  
3 digital inputs




**AR1034**  
**AR2040**  
RS485 port




**AQ1042**  
3 digital inputs + aux

### Power supply modules



**AP1021**  
18-60VAC/DC power supply



**AP1020**  
90-260 VAC/DC power supply



**AR1039**  
RS232 port + RTC