

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz




Typical Applications

Prescaler for 0.5 to 18 GHz PLL Applications:

- Point-to-Point / Multi-Point Radios
- VSAT Radios
- Fiber Optic
- Test Equipment
- Military & Space

Functional Diagram

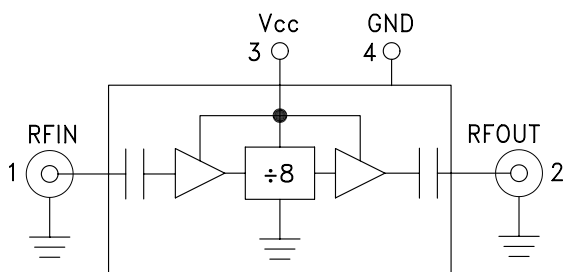

Features

- Ultra Low SSB Phase Noise: -150 dBc/Hz
- Very Wide Bandwidth
- Output Power: -4 dBm
- Single DC Supply: +5V
- Hermetically Sealed Module
- Field Replaceable SMA Connectors
- 55 to +85 °C Operating Temperature

General Description

The HMC-C007 is a low noise Divide-by-8 Static Divider utilizing InGaP GaAs HBT technology packaged in a miniature, hermetic module with replaceable SMA connectors. This device operates from 0.5 to 18 GHz input frequency from a single +5.0V DC supply. The low additive SSB phase noise of -150 dBc/Hz at 100 kHz offset helps the user maintain excellent system noise performance.

Electrical Specifications, $T_A = +25^\circ\text{C}$, 50 Ohm System, $V_{cc} = +5V$


Parameter	Conditions	Min.	Typ.	Max.	Units
Maximum Input Frequency		18	19		GHz
Minimum Input Frequency	Sine Wave Input			0.5	GHz
Input Power Range	Fin = 2 to 4 GHz	-10	-15	+10	dBm
	Fin = 4 to 12 GHz	-15	-20	+10	dBm
	Fin = 12 to 14 GHz	-15	-20	+5	dBm
	Fin = 14 to 18 GHz	-10	-15	0	dBm
Output Power	Fin = 0.5 to 18 GHz	-7	-4		dBm
Reverse Leakage	Fin = 0.5 to 18 GHz		55		dB
SSB Phase Noise (100 kHz offset)	Pin = 0 dBm, Fin = 4.8 GHz		-150		dBc/Hz
Output Transition Time	Pin = 0 dBm, Fout = 882 MHz		100		ps
Supply Current (Icc)			98		mA

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz


16

FREQ. DIVIDERS - CONNECTORIZED MODULES


Input Sensitivity Window, $T = 25^\circ\text{C}$

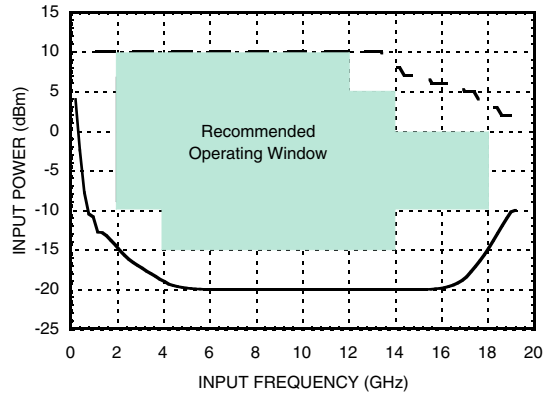


Input Sensitivity vs. Temperature

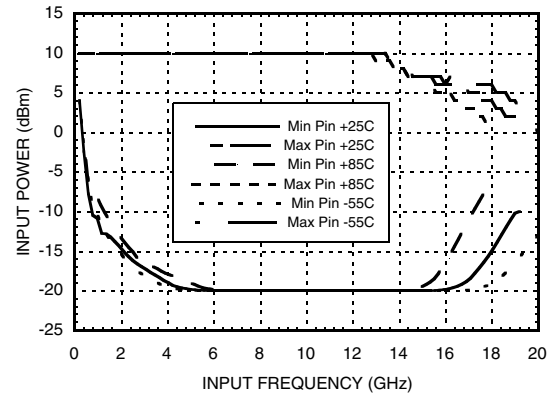


Output Power vs. Temperature

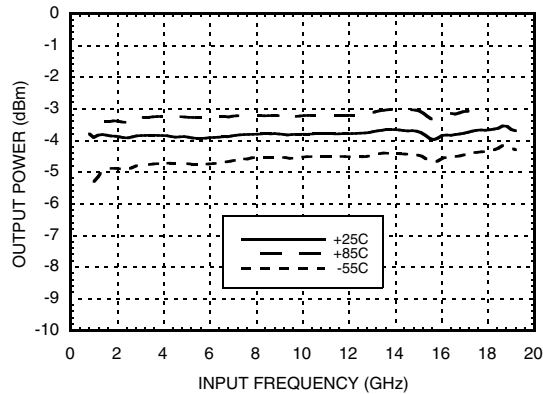


**SSB Phase Noise Performance,
 $P_{in} = 0\text{ dBm}$, $T = 25^\circ\text{C}$**

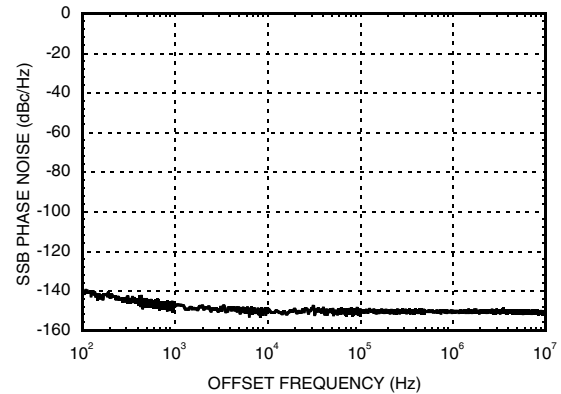

**Output Harmonic Content,
 $P_{in} = 0\text{ dBm}$, $T = 25^\circ\text{C}$**

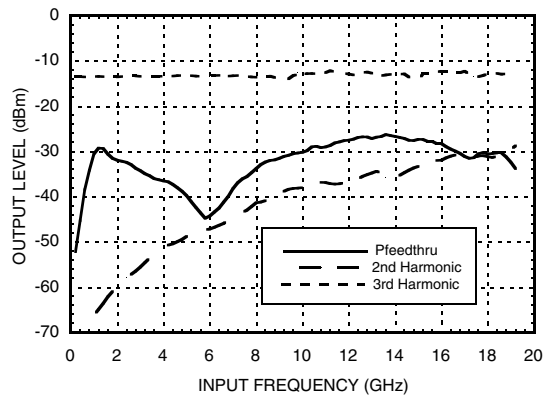


Reverse Leakage, $P_{in} = 0\text{ dBm}$, $T = 25^\circ\text{C}$

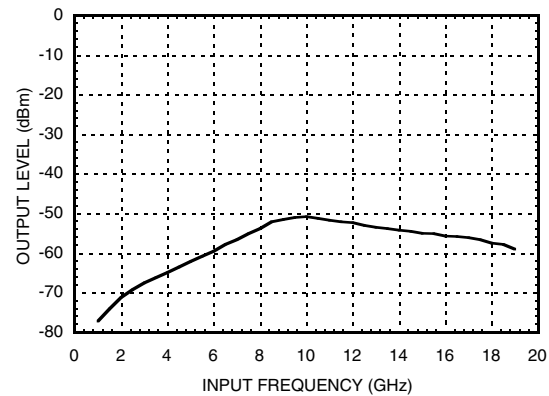

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz

Output Voltage Waveform,
 $P_{in} = 0 \text{ dBm}$, $F_{out} = 882 \text{ MHz}$, $T = 25^\circ \text{C}$

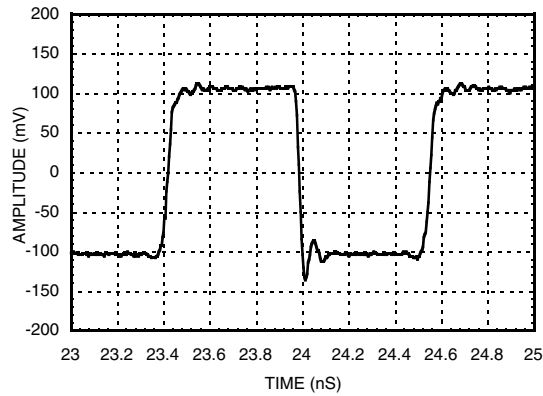

Absolute Maximum Ratings

Supply Voltage (V_{cc})	+5.5V
RF Input ($V_{cc} = +5V$)	+13 dBm
Storage Temperature	-65 to +150 $^\circ\text{C}$
Operating Temperature	-55 to +85 $^\circ\text{C}$
ESD Sensitivity (HBM)	Class 1A

Typical Supply Current vs. V_{cc}

V_{cc}	I_{cc} (mA)
4.75	87
5.0	98
5.25	110

Note: Divider will operate over full voltage range shown above






ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz


16

Pin Description

Pin Number	Function	Description	Interface Schematic
1	RFIN & RF Ground	RF input connector, SMA female, field replaceable. RF Input is AC coupled.	
2	RFOUT & RF Ground	RF output connector, SMA female, field replaceable. Divided output is AC coupled.	
3	Vcc	Supply voltage 5V ± 0.25V.	
4	GND	Power supply ground.	

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz

Outline Drawing

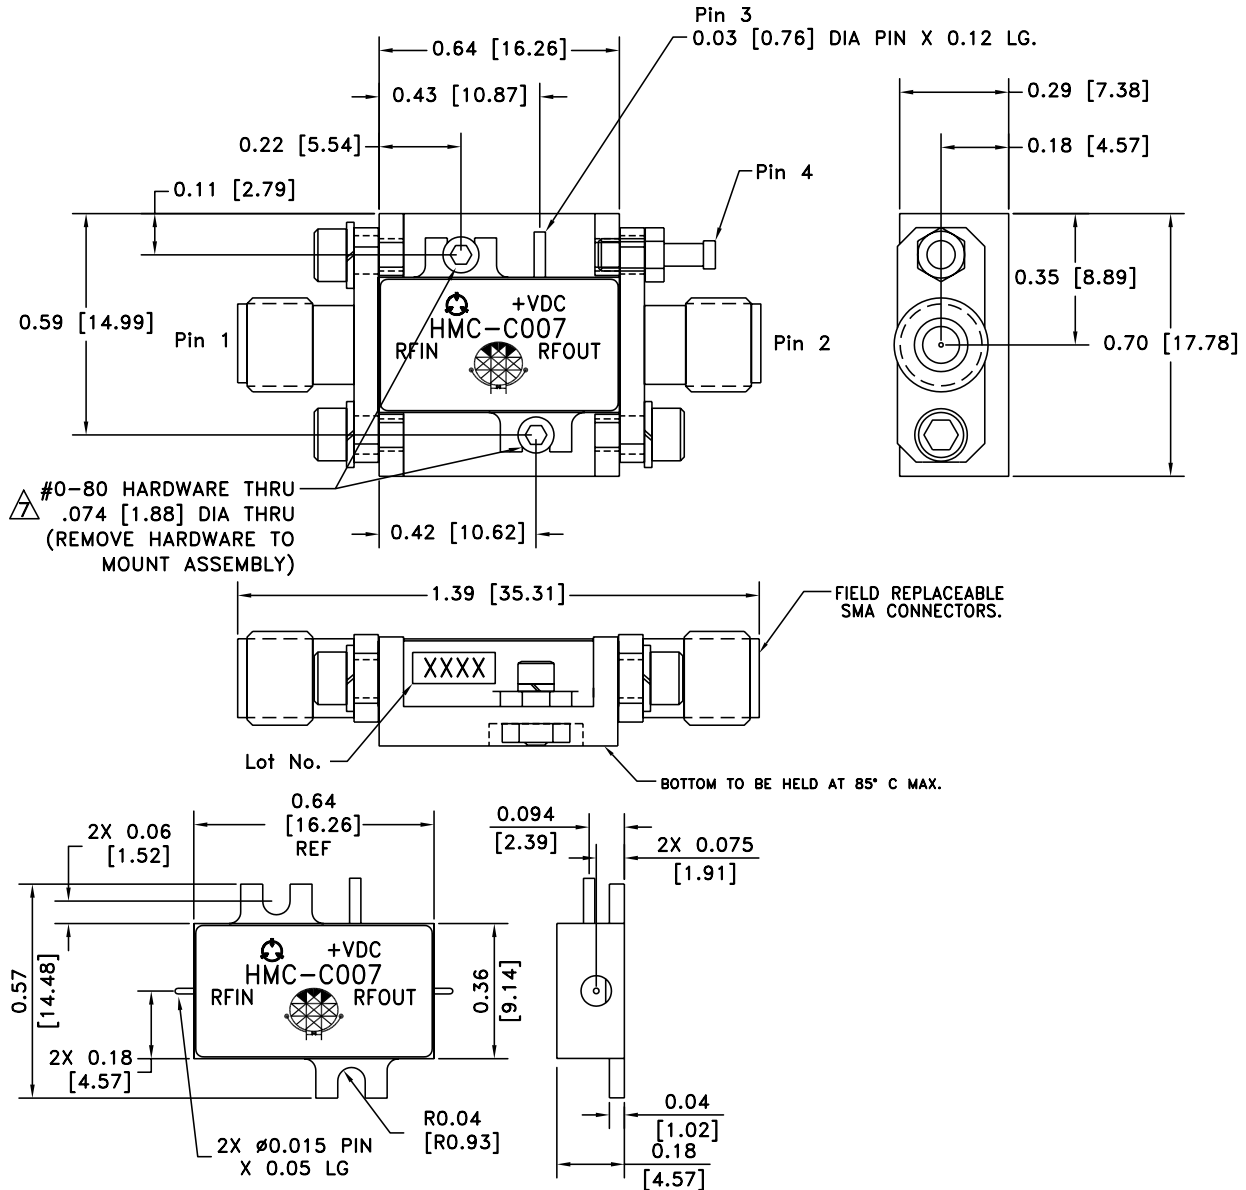

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVART™
2. BRACKET MATERIAL: ALUMINUM
3. PLATING: ELECTROLYTIC GOLD 50 MICROINCHES MIN., OVER ELECTROLYTIC NICKEL 75 MICROINCHES MIN.
4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES ±.005 [0.13] UNLESS OTHERWISE SPECIFIED.
6. FIELD REPLACEABLE SMA CONNECTORS.

TENSOLITE 5602 - 5CCSF OR EQUIVALENT.

△ TO MOUNT MODULE TO SYSTEM PLATFORM REPLACE 0-80 HARDWARE WITH DESIRED MOUNTING SCREWS.

DIVIDE-BY-8 PRESCALER MODULE, 0.5 - 18 GHz

Notes: