

# KSM-95□LJ14Y

The KSM-95□LJ14Y consist of a PIN Photodiode of high speed and a preamplifier IC in the package as an receiver for Infrared remote control systems


## Features

- One mold small size package
- Wide supply-voltage range : 2.7V to 5.5V
- Shielded against electrical field disturbance
- High immunity against ambient light disturbances (Logic Controller Adaptation)
- Available for carrier frequencies between 32.7KHz to 56.9KHz
- TTL and CMOS compatible

## Applications

- Audio & Video Applications (TV, VTR, Audio, DVDP, CDP)
- Home Appliances (Air conditioner, Computer, Camcorder)
- Wireless Toys
- Remote Control Equipment

## DIMENSIONS

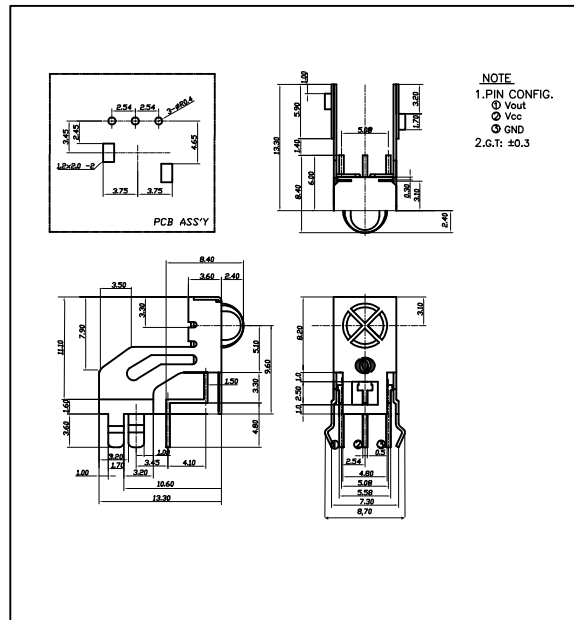

## Maximum Ratings

[Ta=25°C]

Parameter	Symbol	Ratings	Unit
Supply Voltage	Vcc	6.0	V
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-25 ~ +85	°C
Soldering Temperature	Tsol	260 (Max 5 sec)	°C

## B.P.F Center Frequency

Model No.	B.P.F Center Frequency(kHz)
KSM-951LJ14Y	40.0
KSM-952LJ14Y	36.7
KSM-953LJ14Y	37.9
KSM-954LJ14Y	32.7
KSM-955LJ14Y	56.9

## Electro-Optical Characteristics

[Ta=25°C, Vcc=5.0V(Vcc=3.0V)]

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Recommended Supply Voltage	Vcc			2.7	3.0	5.5	V
Current Consumption	Icc	No signal input		-	1.0	1.2	mA
Peak Wavelength *1	λ p			-	940	-	nm
B.P.F Center Frequency	fo			-	37.9	-	kHz
Transmission Distance *1	L	250±50lx	0 °	15	-	-	m
			±30 °	12	-	-	
High level Output voltage *1	V <sub>OH</sub>	30cm over the ray axis		4.5(2.8)	5.0(3.0)	-	V
Low level Output voltage *1	V <sub>OL</sub>			-	0.1	0.5	V
High level Output Pulse Width *1	T <sub>WH</sub>	Burst wave=600μs Period = 1.2		400	600	700	μs
Low level Output Pulse Width *1	T <sub>WL</sub>			500	600	800	μs
Output Form	Active Low Output						

\*1. It specifies the maximum distance between emitter and detector that the output wave form satisfies the standard under the conditions below against the standard transmitter.


1) Measuring place : Indoor without extreme reflection of light

2) Ambient light source : Detecting surface illumination shall be irradiate 200 ± 50lx under ordinary white fluorescence lamp without high frequency lightning


3) Standard transmitter : Burst wave of standard transmitter shall be arranged to 50mVP-P under the measuring circuit

# KSM-95 LJ14Y


## Measuring Method [Ta=25°C]

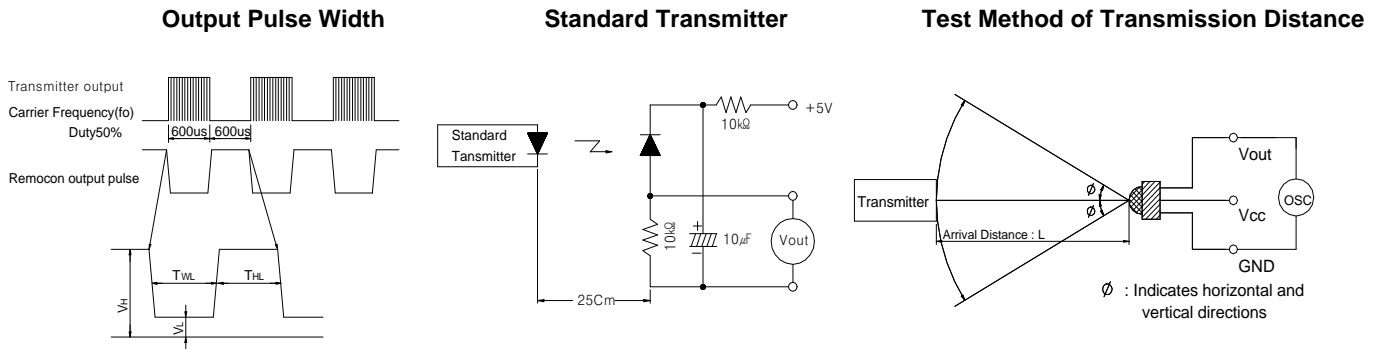

## Typical Characteristics Curve [Ta=25°C]

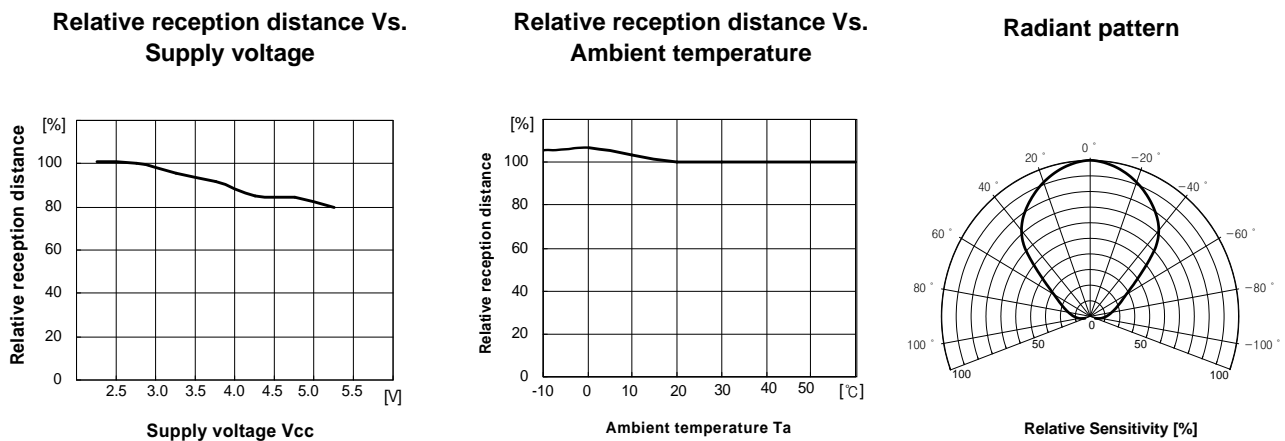

## Standard Application Circuit with R-C Decoupling Filter

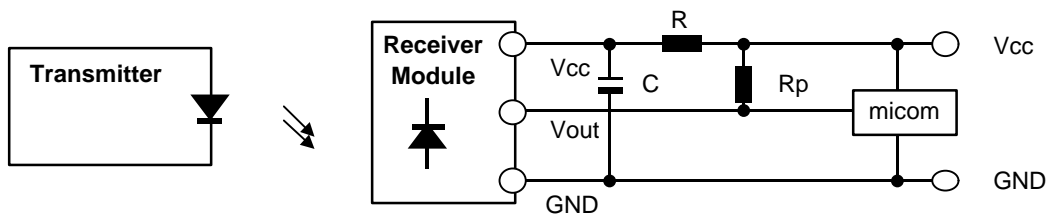

### \*1 Recommended Circuit Description

- 1) Transmitter(IRED) drive current  
:  $I_{FP} = 300\text{mA}_{P-P} \sim 600\text{mA}_{P-P}$
- 2) R-C Decoupling Filter with Lower Cut-off Frequency  
:  $R=100\Omega$ ,  $C=47\mu F \Rightarrow f_c = 1/2\pi RC = 33.9\text{Hz}$
- 3) External pull-up resistor(optional)  
:  $10k\Omega$  over