

RF AMPLIFIER

MODEL **TM6143**

Available as: TM6143, 4 Pin TO-8 (T4)
 TN6143, 4 Pin Surface Mount (SM3)
 FP6143, 4 Pin Flatpack (FP4)
 BX6143, Connectorized Housing (H1)

Features

- High Gain: 15.7 dB Typical
- Low Noise: 1.6 dB Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	15.7	14.5 Min.
Power @ 1 dB Comp. (dBm)	+7.5	+5.0 Min.
Reverse Isolation (dB)	- 19	- 16 Max.
VSWR In	1.7:1	2.5:1 Max.
Out	1.6:1	2.5:1 Max.
Noise figure (dB)	1.6	2.5 Max.
Power Vdc	+15	+15
mA	14.5	16 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +33 (Typ.)
 Second Order Two Tone Intercept Point +28 (Typ.)
 Third Order Two Tone Intercept Point +20 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

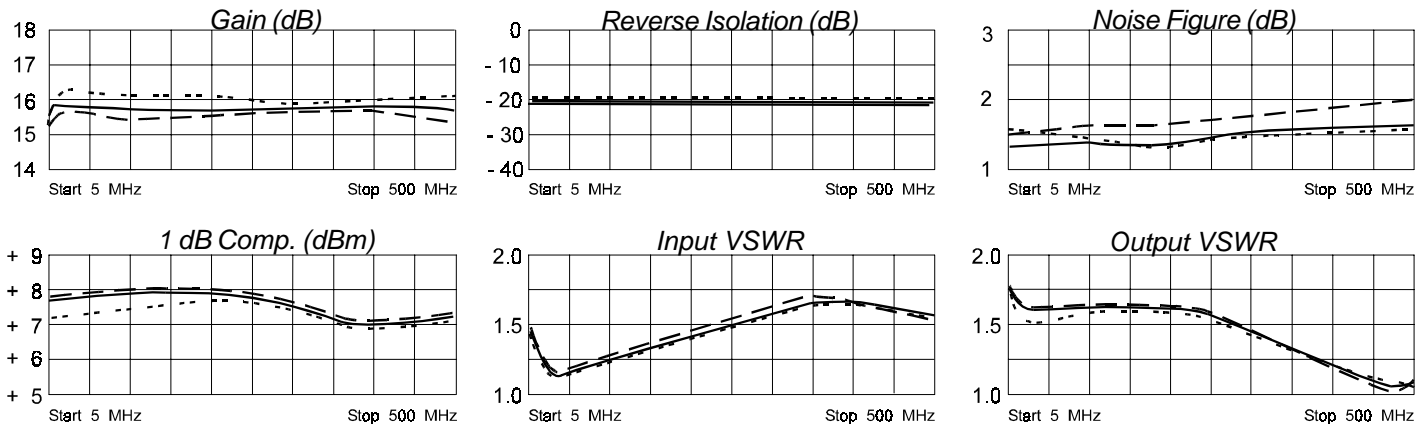

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.16	- 65	6.00	-165	.09	-165	.28	- 23
50	.08	- 72	6.14	167	.10	165	.24	- 26
100	.11	- 92	6.12	153	.10	147	.23	- 46
200	.18	-120	6.11	124	.10	117	.22	- 85
300	.23	-143	6.14	95	.11	89	.19	-122
400	.25	-171	6.25	64	.11	65	.09	-158
500	.22	145	6.07	27	.11	41	.04	- 3



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 ···· FAX 215-464-4001 3/14/03