

RF AMPLIFIER

MODEL *TM9121*

Available as: TM9121, 4 Pin TO-8 (T4)
 TN9121, 4 Pin Surface Mount (SM3)
 FP9121, 4 Pin Flatpack (FP4)
 BX9121, Connectorized Housing (H1)

Features

- Medium Gain: 15 dB Gain Typical
- Medium Output Power: +13.5 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +40 (Typ.)
 Second Order Two Tone Intercept Point +34 (Typ.)
 Third Order Two Tone Intercept Point +26 (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1500 MHz	10 - 1500 MHz
Gain (dB)	15	13.5 Min.
Power @ 1 dB Comp. (dBm)	+13.5	+12.0 Min.
Reverse Isolation (dB)	- 16	- 15 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise figure (dB)	<4.0	5.0 Max.
Power Vdc	+15	+15
mA	34	37 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

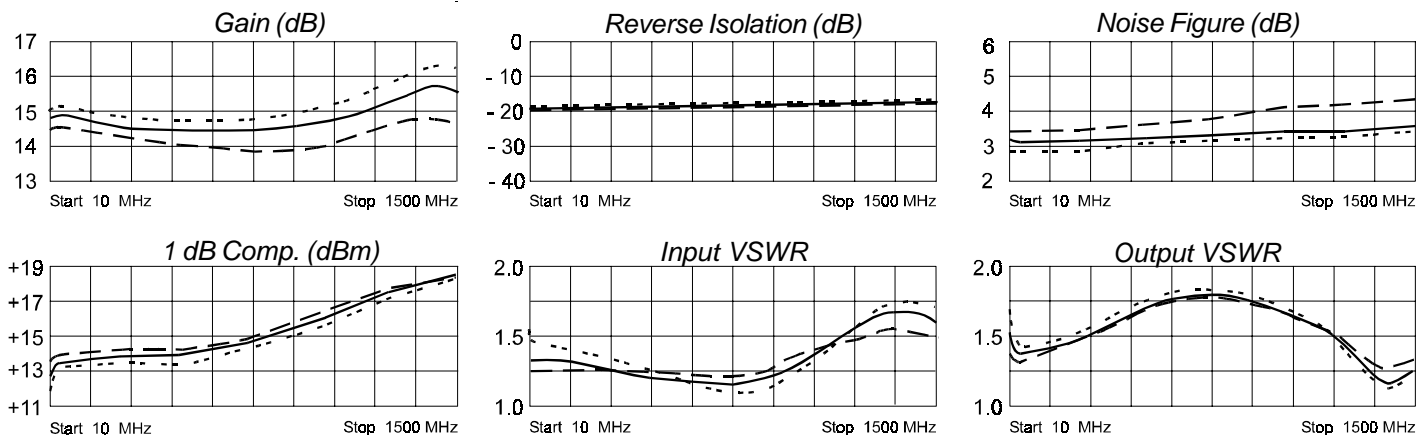

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.15	-139	5.42	-173	.11	9	.20	148
50	.14	-171	5.56	176	.11	1	.15	150
100	.15	-176	5.57	168	.11	-1	.15	138
250	.13	174	5.48	147	.12	-7	.19	99
500	.08	-178	5.32	115	.12	-16	.25	51
750	.06	-135	5.22	83	.13	-30	.29	9
1000	.13	-103	5.30	50	.13	-42	.25	-29
1250	.21	-112	5.62	12	.13	-52	.16	-82
1500	.19	-130	5.81	-40	.17	-66	.14	104



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 ···· FAX 215-464-4001 3/19/03