

**PCM1800**

## Single-Ended Analog Input 20-Bit Stereo ANALOG-TO-DIGITAL CONVERTER


### FEATURES

- DUAL 20-BIT MONOLITHIC  $\Delta\Sigma$  ADC
- SINGLE-ENDED VOLTAGE INPUT
- 64X OVERSAMPLING DECIMATION FILTER:  
Passband Ripple:  $\pm 0.05\text{dB}$   
Stopband Attenuation:  $-65\text{dB}$
- HIGH PERFORMANCE:  
THD+N:  $-88\text{dB}$  (typ)  
SNR:  $95\text{dB}$  (typ)  
Dynamic Range:  $95\text{dB}$  (typ)  
Internal High Pass Filter
- PCM AUDIO INTERFACE:  
Master/Slave Modes  
4 Data Formats
- SAMPLING RATE:  $32\text{kHz}$ ,  $44.1\text{kHz}$ ,  $48\text{kHz}$
- SYSTEM CLOCK:  $256f_s$ ,  $384f_s$ , or  $512f_s$
- SINGLE  $+5\text{V}$  POWER SUPPLY
- SMALL 24-PIN SSOP PACKAGE

### DESCRIPTION

PCM1800 is a low cost, single chip stereo analog-to-digital converter with single-ended analog voltage inputs. The PCM1800 uses a delta-sigma modulator with 64X oversampling, including a digital decimation filter and serial interface which supports both Master and Slave Modes and four data formats. PCM1800 is suitable for a wide variety of cost-sensitive consumer applications where high performance is required.

PCM1800 is fabricated on a highly advanced CMOS process.

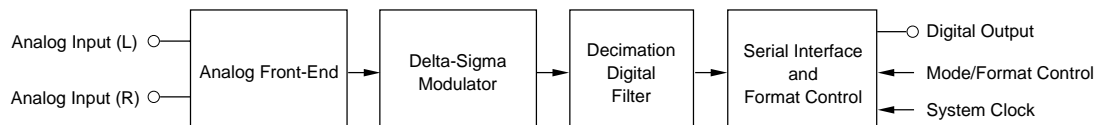

International Airport Industrial Park • Mailing Address: PO Box 11400, Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd., Tucson, AZ 85706 • Tel: (520) 746-1111 • Twx: 910-952-1111  
Internet: <http://www.burr-brown.com/> • FAXLine: (800) 548-6133 (US/Canada Only) • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6132


# SPECIFICATIONS

All specifications at +25°C, +V<sub>DD</sub> = +V<sub>CC</sub> = +5V, f<sub>S</sub> = 44.1kHz, and 20-bit input data, SYSCLK = 384f<sub>S</sub>, unless otherwise noted.

PARAMETER	CONDITIONS	PCM1800E			UNITS
		MIN	TYP	MAX	
<b>RESOLUTION</b>		20			Bits
<b>DIGITAL INPUT/OUTPUT</b>					
Input Logic Level:					
V <sub>IH</sub> <sup>(1)</sup>		2.0			V
V <sub>IL</sub> <sup>(1)</sup>				0.8	V
Input Logic Current:					
I <sub>IN</sub> <sup>(2)</sup>				±1	μA
I <sub>IN</sub> <sup>(3)</sup>				+100	μA
Output Logic Level:					
V <sub>OH</sub> <sup>(4)</sup>	I <sub>OH</sub> = -1.6mA	4.5			V
V <sub>OL</sub> <sup>(4)</sup>	I <sub>OL</sub> = +3.2mA			0.5	V
Sampling Frequency		32	44.1	48	kHz
System Clock Frequency	256f <sub>S</sub>	8.1920	11.2896	12.2880	MHz
	384f <sub>S</sub>	12.2880	16.9344	18.4320	MHz
	512f <sub>S</sub>	16.3840	22.5792	24.5760	MHz
<b>DC ACCURACY</b>					
Gain Mismatch Channel-to-Channel			±1.0	±2.5	% of FSR
Gain Error			±2.0	±5.0	% of FSR
Gain Drift			±20		ppm of FSR/°C
Bipolar Zero Error	High Pass Filter Bypass		±2.0		% of FSR
Bipolar Zero Drift	High Pass Filter Bypass		±20		ppm of FSR/°C
<b>DYNAMIC PERFORMANCE<sup>(5)</sup></b>					
THD+N at FS (-0.5dB)			-88	-80	dB
THD+N at -60dB			-92		dB
Dynamic Range	EIAJ, A-weighted	90	95		dB
Signal-To-Noise Ratio	EIAJ, A-weighted	90	95		dB
Channel Separation		88	93		dB
<b>DYNAMIC PERFORMANCE<sup>(5)</sup></b>					
Dynamic Range	16-Bit, A-weighted		94		dB
Signal-To-Noise Ratio	16-Bit, A-weighted		94		dB
Channel Separation	16-Bit		92		dB
<b>ANALOG OUTPUT</b>					
Input Range	FS (V <sub>IN</sub> = 0dB)		2.828		Vp-p
Center Voltage			2.1		V
Input Impedance			30		kΩ
Anti-Aliasing Filter Frequency Response	C <sub>EXT</sub> = 470pF, -3dB		170		kHz
<b>DIGITAL FILTER PERFORMANCE</b>					
Passband				0.454f <sub>S</sub>	Hz
Stopband		0.583f <sub>S</sub>			Hz
Passband Ripple				±0.05	dB
Stopband Attenuation		-65			dB
Delay Time (Latency)			17.4/f <sub>S</sub>		sec
High Pass Frequency Response	-3dB			0.019f <sub>S</sub>	mHz
<b>POWER SUPPLY REQUIREMENTS</b>					
Voltage Range	+V <sub>CC</sub>	+4.5	+5.0	+5.5	VDC
	+V <sub>DD</sub>	+4.5	+5.0	+5.5	VDC
Supply Current <sup>(6)</sup>	+V <sub>CC</sub> = +V <sub>DD</sub> = +5V		18	25	mA
Power Dissipation	+V <sub>CC</sub> = +V <sub>DD</sub> = +5V		90	125	mW
<b>TEMPERATURE RANGE</b>					
Operation		-25		+85	°C
Storage		-55		+125	°C
Thermal Resistance, θ <sub>JA</sub>			100		°C/W

NOTES: (1) Pins 6, 7, 8, 9, 10, 11, 16 and 12, 13, 14: RSTB, BYPAS, FMT0, FMT1, MODE0, MODE1, SYSCLK, and FSYNC, LRCK, BCK under Slave Mode. (2) Pins 16 and 12, 13, 14: SYSCLK and FSYNC, LRCK, BCK under Slave Mode (Schmitt Trigger input). (3) Pins 6, 7, 8, 9, 10, 11: RSTB, BYPAS, FMT0, FMT1, MODE0, MODE1 (Schmitt Trigger input, with 100kΩ typical pull-down resistor). (4) Pins 15 and 12, 13, 14: DOUT and FSYNC, LRCK, BCK under Master Mode. (5) f<sub>IN</sub> = 1kHz, using Audio Precisions System II, rms Mode with 20kHz LPF and 400Hz HPF in calculation. (6) No load on DOUT (pin 15) in the Slave Mode.

## PIN CONFIGURATION

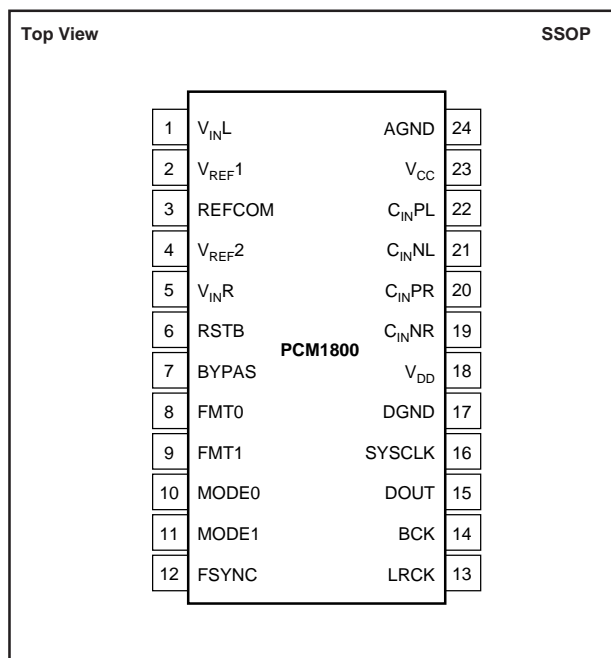

## PACKAGE INFORMATION

PRODUCT	PACKAGE	PACKAGE DRAWING NUMBER <sup>(1)</sup>
PCM1800E	24-Pin SSOP	338

NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix C of Burr-Brown IC Data Book.

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage: +V <sub>DD</sub> , +V <sub>CC</sub> .....	+6.5V
Supply Voltage Differences .....	±0.1V
GND Voltage Differences .....	±0.1V
Digital Input Voltage .....	-0.3V to (V <sub>DD</sub> + 0.3V)
Analog Input Voltage .....	-0.3V to (V <sub>CC</sub> + 0.3V)
Input Current (any pin except supplies) .....	±10mA
Power Dissipation .....	300mW
Operating Temperature Range .....	-25°C to +85°C
Storage Temperature .....	-55°C to +125°C
Lead Temperature (soldering, 5s) .....	+260°C
(reflow, 10s) .....	+235°C

## PIN ASSIGNMENTS

PIN	NAME	I/O	DESCRIPTION
1	V <sub>INL</sub>	IN	Analog Input, Lch
2	V <sub>REF1</sub>	—	Reference 1 Decoupling Capacitor
3	REFCOM	—	Reference Decoupling Common
4	V <sub>REF2</sub>	—	Reference 2 Decoupling Capacitor
5	V <sub>INR</sub>	IN	Input Reference, Rch
6	RSTB	IN	Reset Input, Active LOW <sup>(1)</sup>
7	BYPAS	IN	High Pass Filter Bypass Control <sup>(1)</sup>
8	FMT0	IN	Audio Data Format 0 <sup>(1)</sup>
9	FMT1	IN	Audio Data Format 1 <sup>(1)</sup>
10	MODE0	IN	Master/Slave Mode Selection 0 <sup>(1)</sup>
11	MODE1	IN	Master/Slave Mode Selection 1 <sup>(1)</sup>
12	FSYNC	IN/OUT	Frame Synchronization
13	LRCK	IN/OUT	Sampling Clock Input/Output (f <sub>s</sub> )
14	BCK	IN/OUT	Bit Clock Input/Output
15	DOUT	OUT	Audio Data Output
16	SYSCLK	IN	System Clock Input, 256f <sub>s</sub> , 384f <sub>s</sub> , or 512f <sub>s</sub>
17	DGND	—	Digital Ground
18	V <sub>DD</sub>	—	Digital Power Supply
19	C <sub>INNR</sub>	—	Anti-alias Filter Capacitor (-), Rch
20	C <sub>INPR</sub>	—	Anti-alias Filter Capacitor (+), Rch
21	C <sub>INNL</sub>	—	Anti-alias Filter Capacitor (-), Lch
22	C <sub>INPL</sub>	—	Anti-alias Filter Capacitor (+), Lch
23	V <sub>CC</sub>	—	Analog Power Supply
24	AGND	—	Analog Ground

NOTE: (1) With 100kΩ typical pull-down resistor.




## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.


ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

## BLOCK DIAGRAM






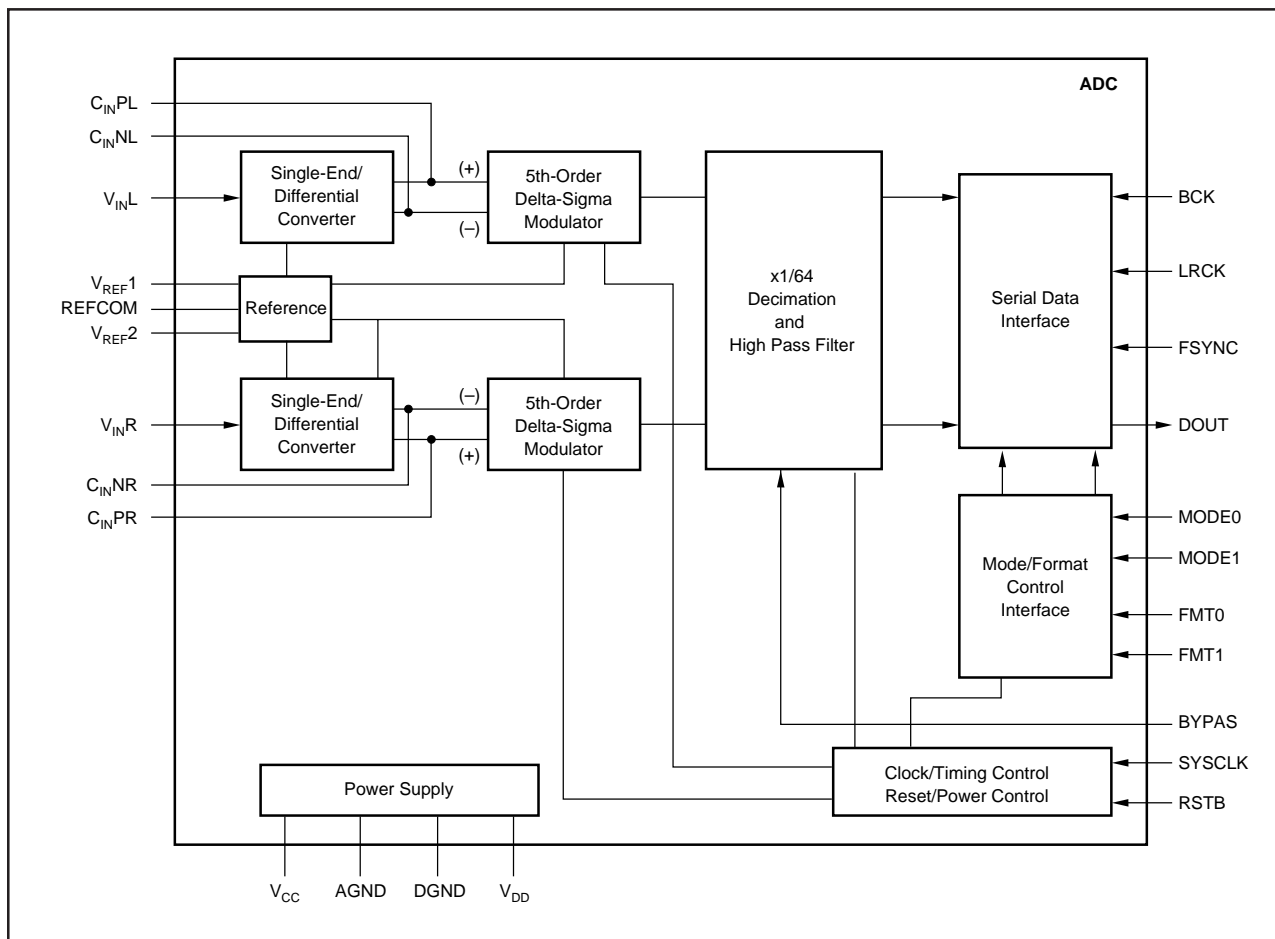


## ANALOG FRONT-END (Single-Channel)

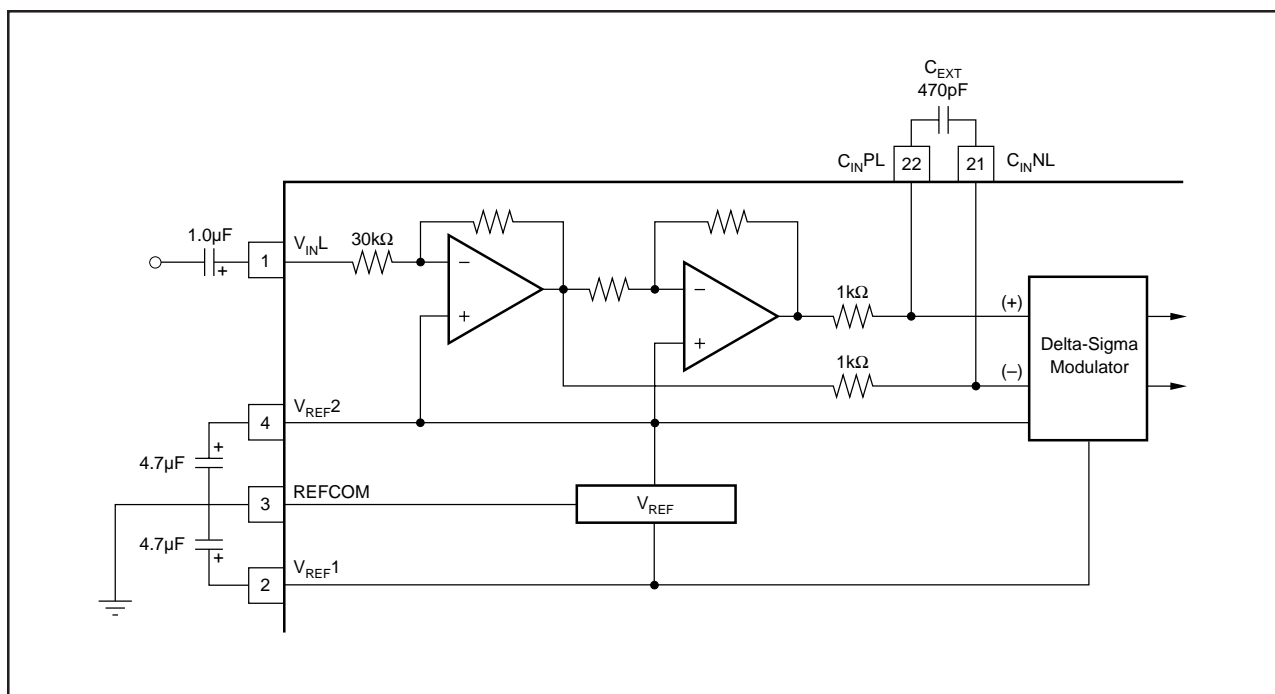




# TYPICAL PERFORMANCE CURVES

At  $T_A = +25^\circ\text{C}$ ,  $+V_{DD} = +V_{CC} = +5\text{V}$ ,  $f_S = 44.1\text{kHz}$ , and 20-bit input data,  $\text{SYSCLK} = 384f_S$ , unless otherwise noted.

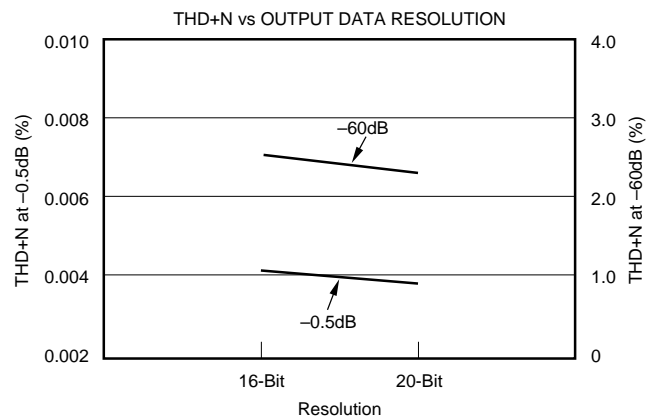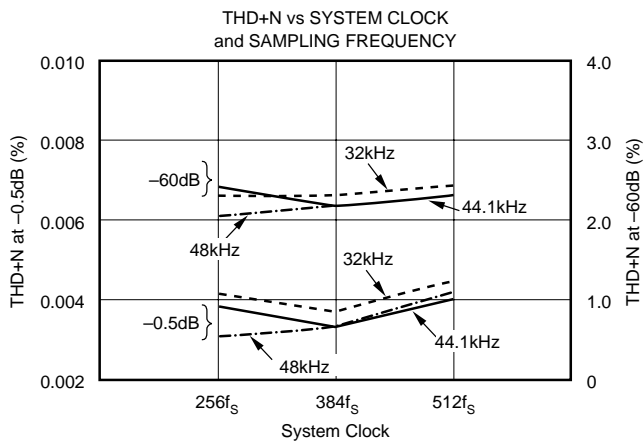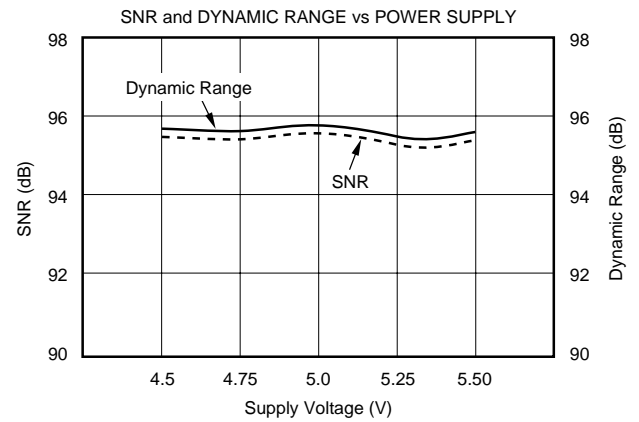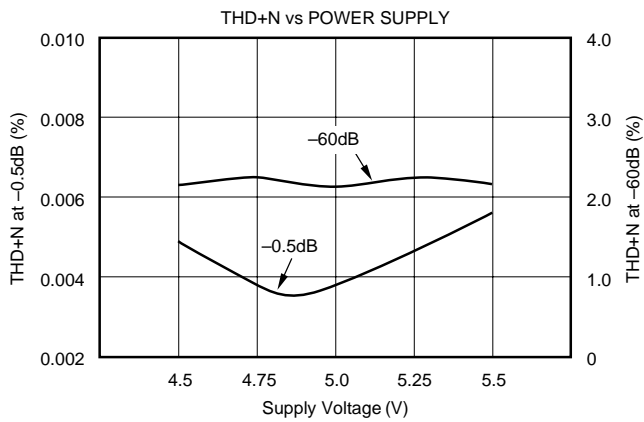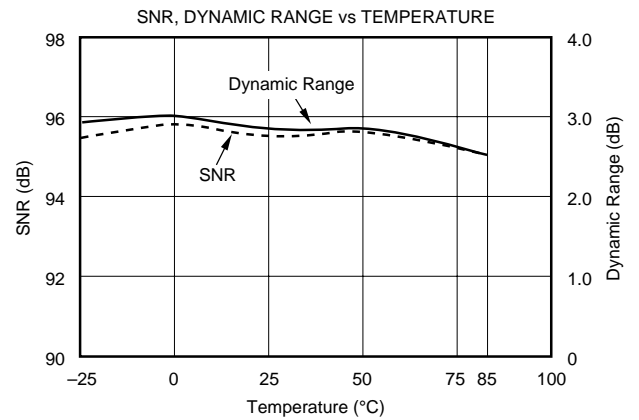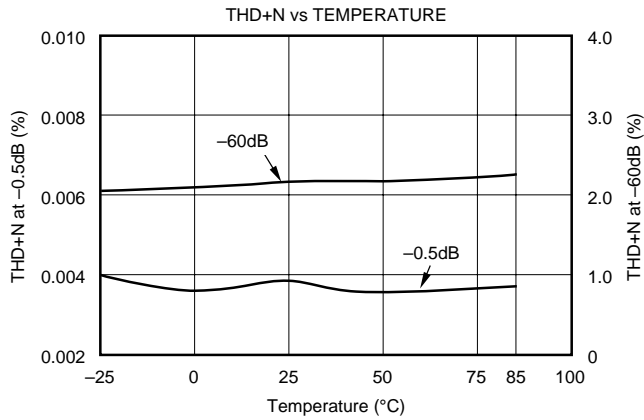





## TYPICAL PERFORMANCE CURVES (CONT)

At  $T_A = +25^\circ\text{C}$ ,  $+V_{DD} = +V_{CC} = +5\text{V}$ ,  $f_S = 44.1\text{kHz}$ , and 20-bit input data,  $\text{SYSCLK} = 384f_S$ , unless otherwise noted.

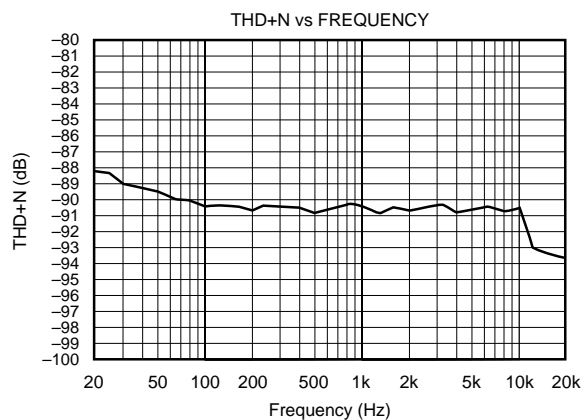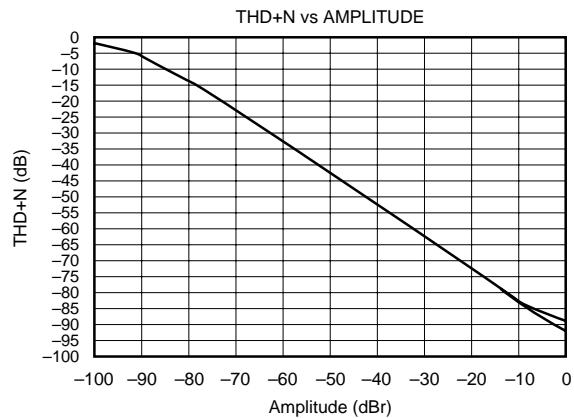
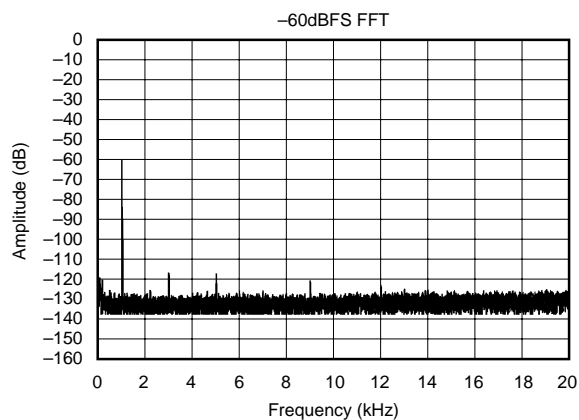


# TYPICAL PERFORMANCE CURVES

## DIGITAL FILTER

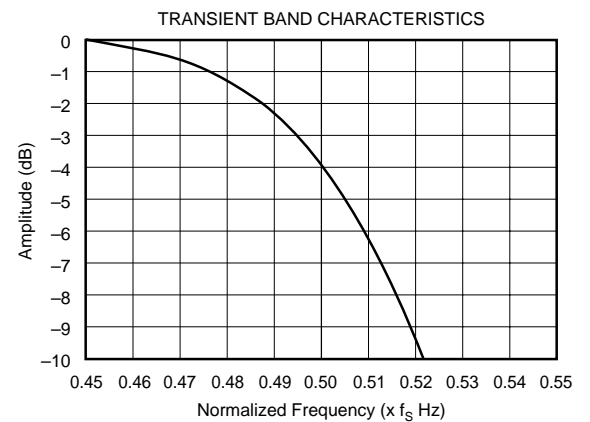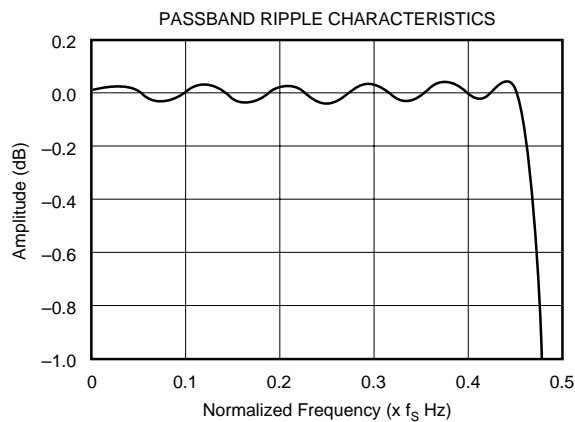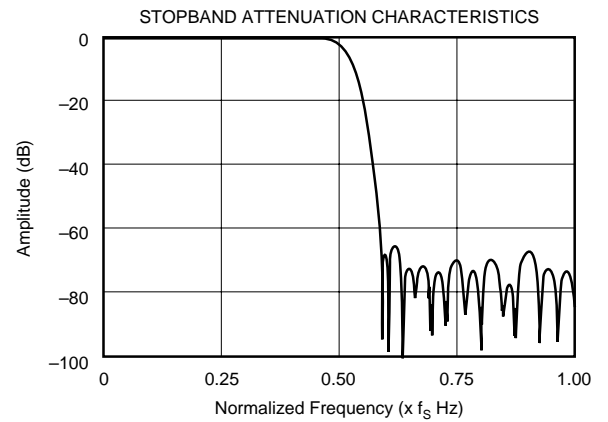
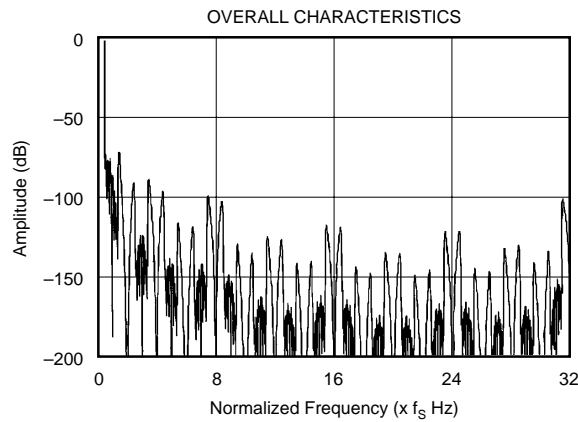


## HIGH PASS FILTER

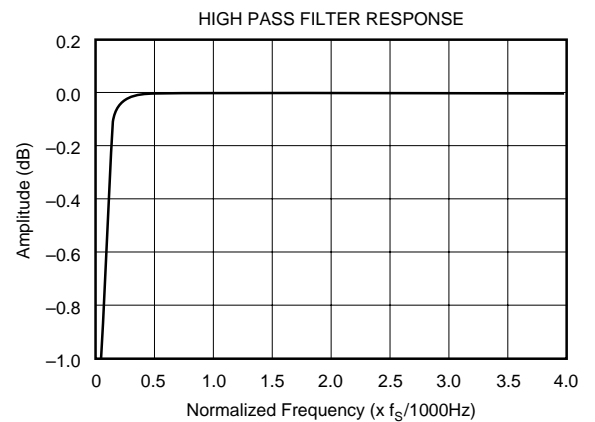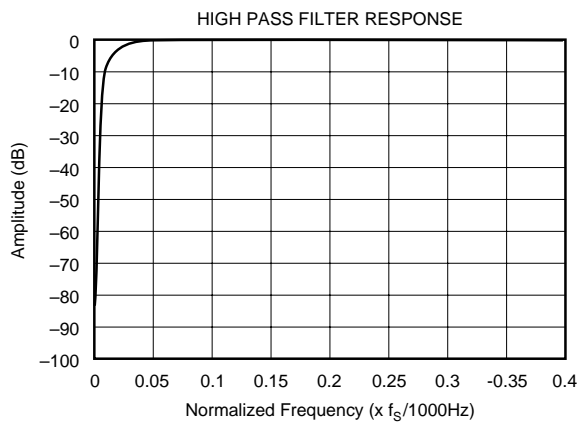

# TYPICAL PERFORMANCE CURVES

## ANTI-ALIASING FILTER

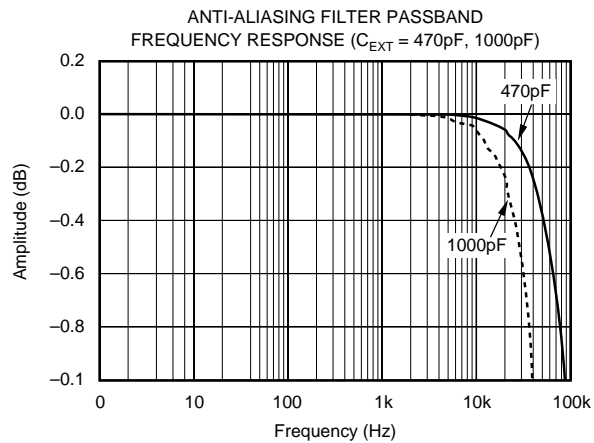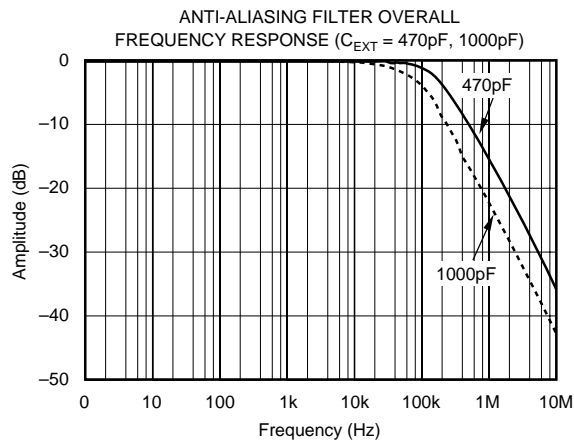



## THEORY OF OPERATION

PCM1800 consists of a bandgap reference, two channels of a single-to-differential converter, a fully differential 5th-order delta-sigma modulator, a decimation filter (including digital high pass), and a serial interface circuit. The Block Diagram illustrates the total architecture of PCM1800, the Analog Front-End diagram illustrates the architecture of the single-to-differential converter, and the anti-aliasing filter is illustrated in the Block Diagram. Figure 1 illustrates the architecture of the 5th-order delta-sigma modulator and transfer functions.

An internal high precision reference with two external capacitors provides all reference voltages which are required by the converter, and defines the full-scale voltage range of both channels. The internal single-to-differential voltage converter saves the design, space and extra parts needed for external circuitry required by many delta-sigma converters. The internal full differential architecture provides a wide dynamic range and excellent power supply rejection performance.

The input signal is sampled at 64X oversampling rate, eliminating the need for a sample-and-hold circuit, and simplifying anti-alias filtering requirements. The 5th-order delta-sigma noise shaper consists of five integrators which use a switched-capacitor topology, a comparator and a feedback loop consisting of a 1-bit DAC. The delta-sigma modulator shapes the quantization noise, shifting it out of the audio band in the frequency domain. The high order of the modulator enables it to randomize the modulator outputs, reducing idle tone levels.

The 64 $f_s$ , 1-bit stream from the modulator is converted to 1 $f_s$ , 20-bit digital data by the decimation filter, which also acts as a low pass filter to remove the shaped quantization noise. The DC components are removed by a high pass filter, and the filtered output is converted to time-multiplexed serial signals through a serial interface which provides flexible serial formats and Master/Slave Modes.

## SYSTEM CLOCK

The system clock for PCM1800 must be either 256 $f_s$ , 384 $f_s$ , or 512 $f_s$ , where  $f_s$  is the audio sampling frequency. The system clock must be supplied on SYSCLK (pin 16).

PCM1800 also has a system clock detection circuit which automatically senses if the system clock is operating at 256 $f_s$ , 384 $f_s$ , or 512 $f_s$ .

When 384 $f_s$  and 512 $f_s$  system clock is in Slave Mode, the system clock is divided into 256 $f_s$  automatically. The 256 $f_s$  clock is used to operate the digital filter and the modulator. Table I lists the relationship of typical sampling frequencies and system clock frequencies. Figure 2 illustrates the system clock timing.

SAMPLING RATE FREQUENCY (kHz)	SYSTEM CLOCK FREQUENCY (MHz)		
	256 $f_s$	384 $f_s$	512 $f_s$
32	8.1920	12.2880	16.3840
44.1	11.2896	16.9340	22.5792
48	12.2880	18.4320	24.5760

TABLE I. System Clock Frequencies.

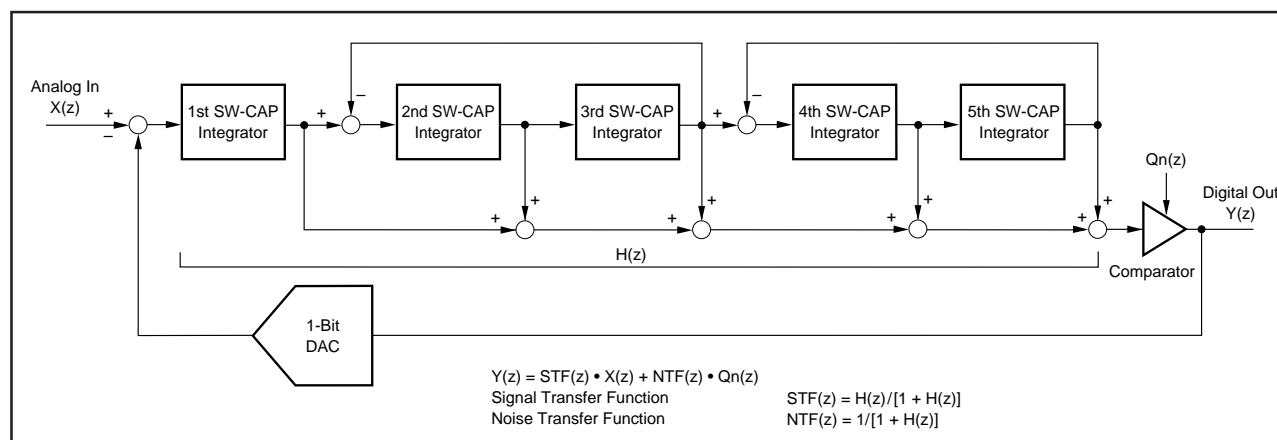


FIGURE 1. Simplified Diagram of the PCM1800 5th-Order Delta-Sigma Modulator.

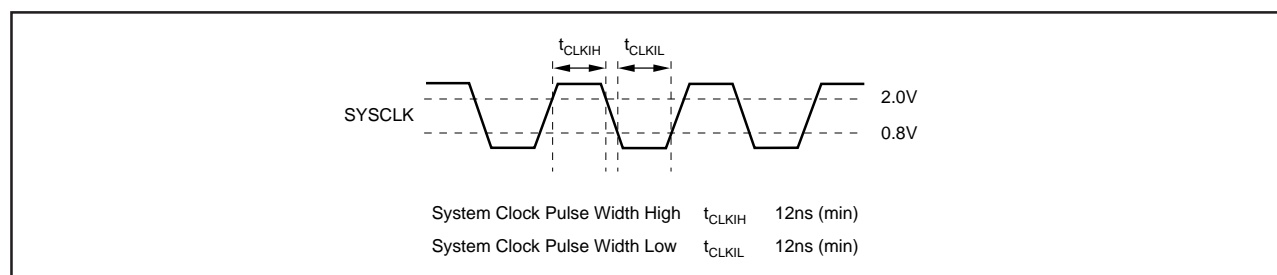


FIGURE 2. System Clock Timing.

## RESET

PCM1800 has both an internal power-on reset circuit and an external forced reset (RSTB, pin 6). The internal power-on reset initializes (resets) when the supply voltage ( $V_{CC}/V_{DD}$ ) exceeds 4.0V (typ). To initiate the reset sequence externally, apply a logic level LOW to the RSTB pin.

The RSTB pin is terminated by an internal pull-down resistor. If the RSTB pin is unconnected, the ADC will remain in the reset state. During  $V_{CC}/V_{DD} < 4.0V$  (typ), RSTB = LOW and 1024 system clock periods after  $V_{CC}/V_{DD}$  4.0V and RSTB = HIGH. The PCM1800 stays in the reset state and the digital output is forced to zero. The digital output is valid after reset state release and 18436f<sub>s</sub> periods. During reset, the logic circuits and the digital filter stop operating. Figures 3 and 4 illustrate the internal power-on reset and external reset timing.

## SERIAL AUDIO DATA INTERFACE

The PCM1800 interfaces the audio system through BCK (pin 14), LRCK (pin 13), FSYNC (pin 12) and DOUT (pin 15).

### INTERFACE MODE

The PCM1800 supports Master and Slave Modes as interface modes and are selected by MODE1 (pin 11) and MODE0 (pin 10), as shown in Table II. In case of the Master Mode, the PCM1800 provides the timing of serial audio data

communications between the PCM1800 and the digital audio processor or external circuit. While in the case of the Slave Mode, the PCM1800 receives the timing of data transfer from an external controller.

MODE1	MODE0	INTERFACE MODE
0	0	Slave Mode (256/384/512f <sub>s</sub> )
0	1	Master Mode (512f <sub>s</sub> )
1	0	Master Mode (384f <sub>s</sub> )
1	1	Master Mode (256f <sub>s</sub> )

TABLE II. Interface Modes.

### Master Mode

In the Master Mode, BCK, LRCK, and FSYNC are output pins and are controlled by timing generated in clock circuitry of the PCM1800.

FSYNC is used to designate the valid data from the PCM1800. The rising edge of FSYNC indicates the starting point of the converted audio data and the following edge of this signal indicates the ending points of data. The frequency of this signal is fixed at 2xLRCK and duty cycle ratio depends on data bit length. The frequency of BCK is fixed at 64X LRCK.

### Slave Mode

In Slave Mode, BCK, LRCK, and FSYNC are input pins. FSYNC is used to enable BCK signal, and the PCM1800 can shift out the converted data when FSYNC is HIGH.

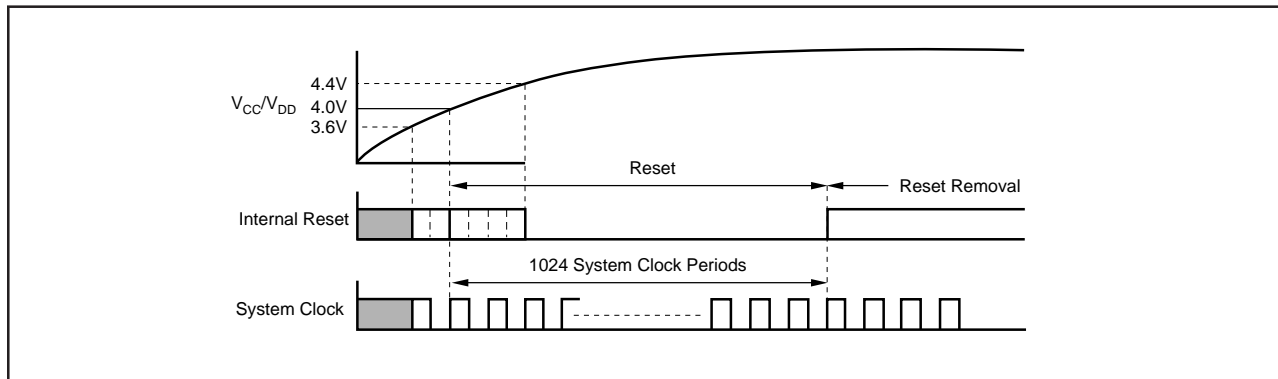


FIGURE 3. Internal Power-On Reset Timing.

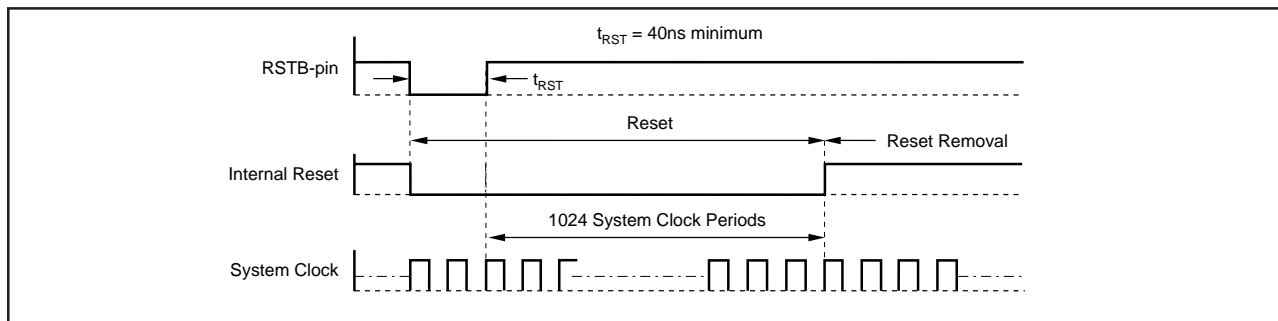


FIGURE 4. RSTB-Pin Reset Timing.

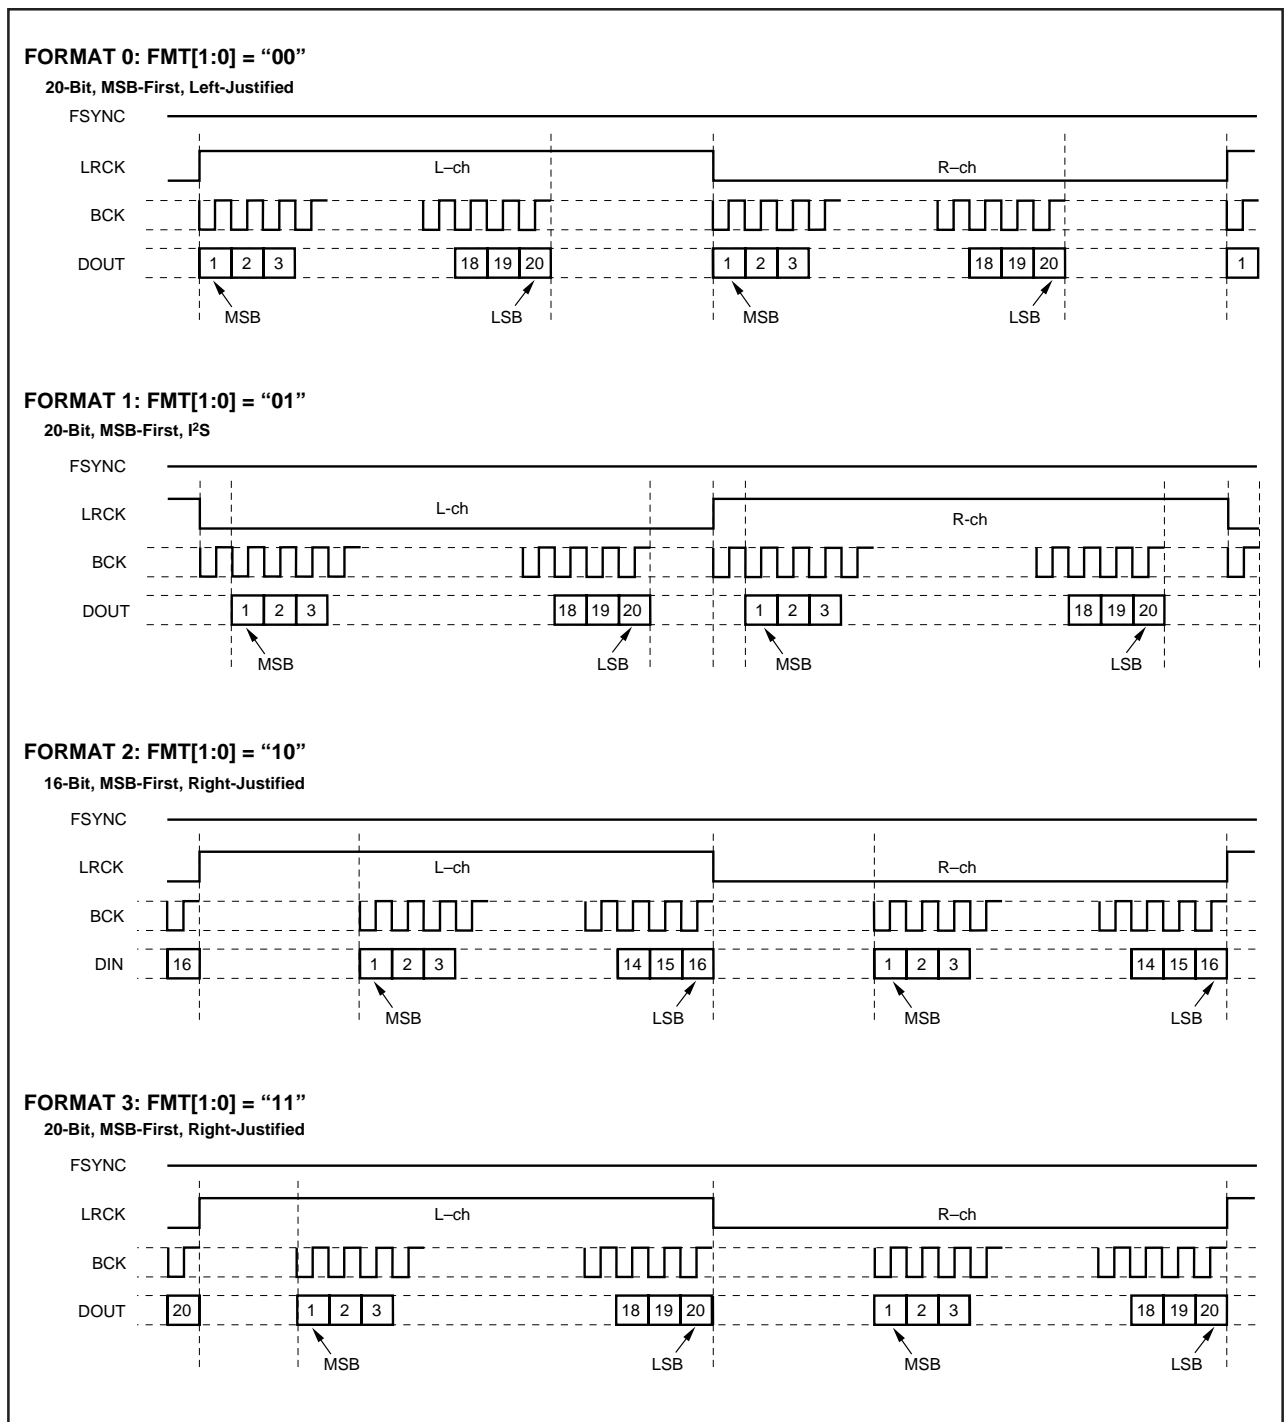


FIGURE 5. Audio Data Format (Slave Mode: FSYNC, LRCK, and BCK are inputs).

## DATA FORMAT

PCM1800 supports four audio data formats in both Master and Slave Modes, and are selected by FMT1 (pin 9) and FMT0 (pin 8), as shown in Table III.

FORMAT #	FMT1	FMT0	DATA FORMAT
0	0	0	20-bit, Left-justified
1	0	1	20-bit, I²S
2	1	0	16-bit, Right-justified
3	1	1	20-bit, Right-justified

NOTE: FMT1 and FMT0 must be stable at RSTB changing from LOW to HIGH.

TABLE III. Data Format.

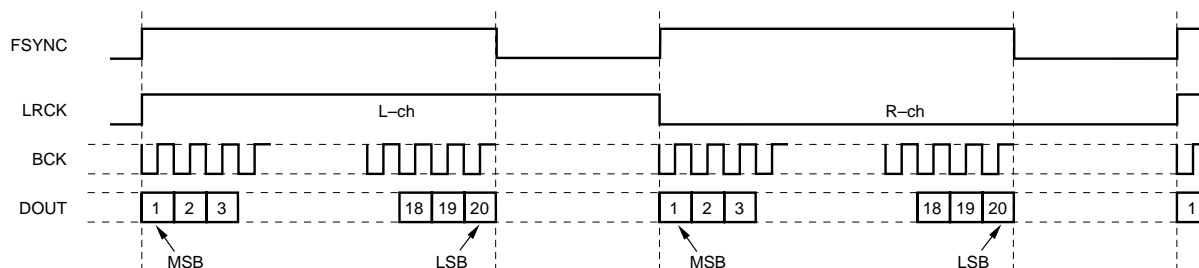
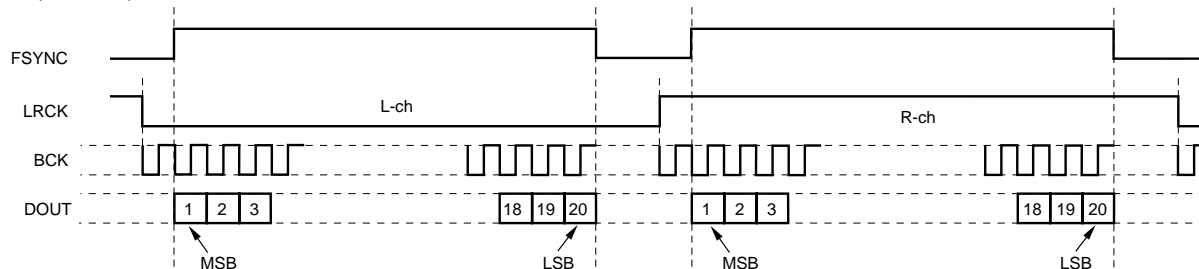
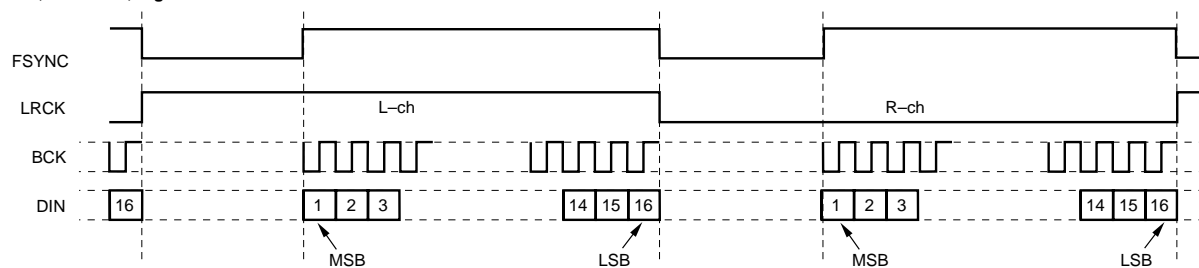
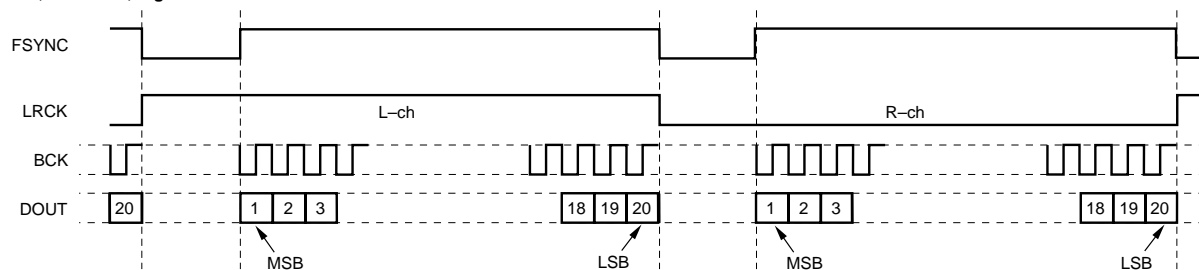
**FORMAT 0: FMT[1:0] = "00"****20-Bit, MSB-First, Left-Justified****FORMAT 1: FMT[1:0] = "01"****20-Bit, MSB-First, I<sup>2</sup>S****FORMAT 2: FMT[1:0] = "10"****16-Bit, MSB-First, Right-Justified****FORMAT 3: FMT[1:0] = "11"****20-Bit, MSB-First, Right-Justified**

FIGURE 6. Audio Data Format (Master Mode: FSYNC, LRCK, and BCK are outputs).

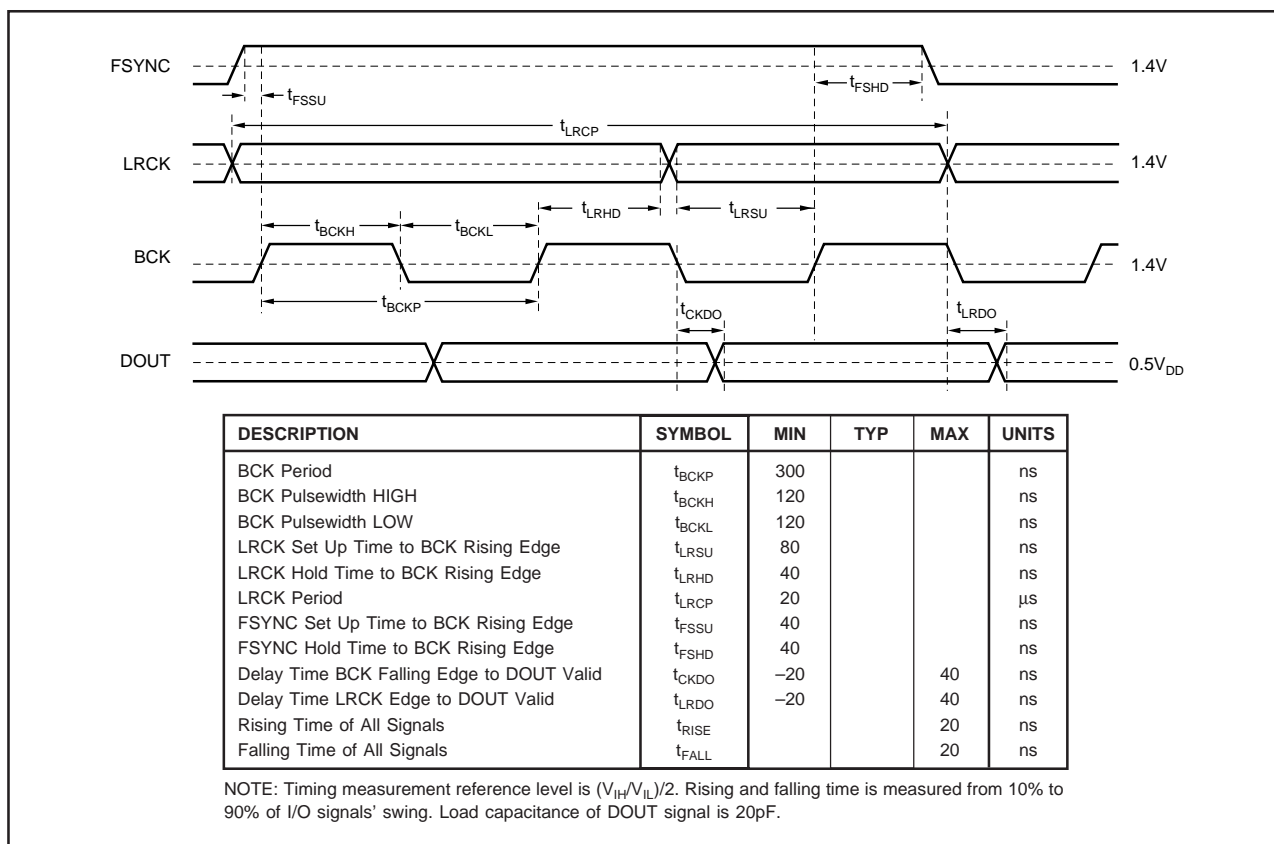


FIGURE 7. Audio Data Interface Timing (Slave Mode: FSYNC, LRCK, and BCK are inputs).

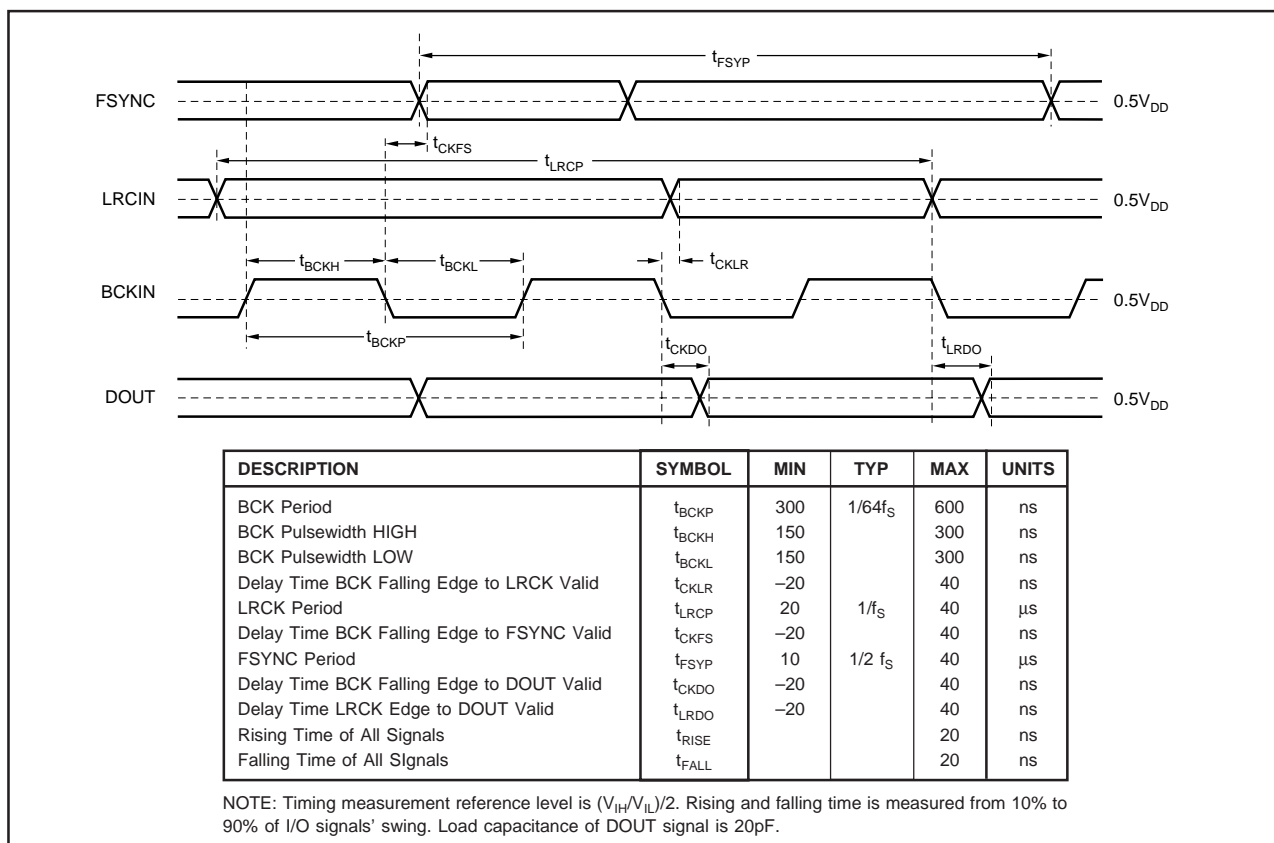


FIGURE 8. Audio Data Interface Timing (Master Mode: FSYNC, LRCK, and BCK are outputs).

## SYNCHRONIZATION WITH DIGITAL AUDIO SYSTEM

In Slave Mode, PCM1800 operates with LRCK synchronized to the system clock (SYSCLK). PCM1800 does not require a specific phase relationship between LRCK and SYSCLK, but does require the synchronization of LRCK and SYSCLK. If the relationship between LRCK and SYSCLK changes more than 6 bit clocks (BCK) during one sample period due to LRCK or SYSCLK jitter, internal operation of the ADC halts within  $1/f_s$  and digital output is forced into BPZ code until resynchronization between LRCK and SYSCLK is completed. In case of changes less than 5 bit clocks (BCK), resynchronization does not occur and above digital output control and discontinuity does not occur.

### ADC DATA OUTPUT AT RESET

Figures 9 and 10 illustrate the ADC digital output when the reset operation is done and synchronization is lost. During undefined data, it may generate some noise in the audio signal. Also, the transition of normal to undefined data and undefined or zero data to normal makes a discontinuity of data on the digital output, and may generate some noise in the audio signal.

## BOARD DESIGN AND LAYOUT CONSIDERATIONS

### $V_{CC}$ , $V_{DD}$ PINS

The digital and analog power supply lines to the PCM1800 should be bypassed to the corresponding ground pins with both 0.1 $\mu$ F ceramic and 10 $\mu$ F tantalum capacitors as close to the pins as possible to maximize the dynamic performance of the ADC. Although PCM1800 has two power lines to maximize the potential of dynamic performance, using one common power supply is recommended to avoid unexpected power supply problems, such as latch-up or power supply sequence.

### AGND, DGND PINS

To maximize the dynamic performance of the PCM1800, the analog and digital grounds are not internally connected. These points should have very low impedance to avoid digital noise feedback into the analog ground. They should be connected directly to each other under the parts to reduce potential noise problems.

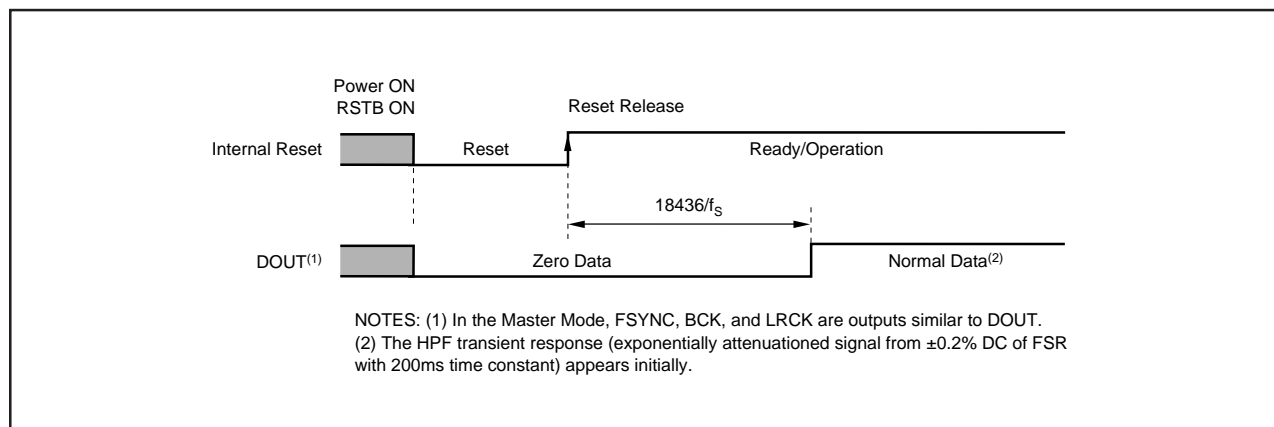


FIGURE 9. ADC Output for Power-On Reset and RSTB Control.

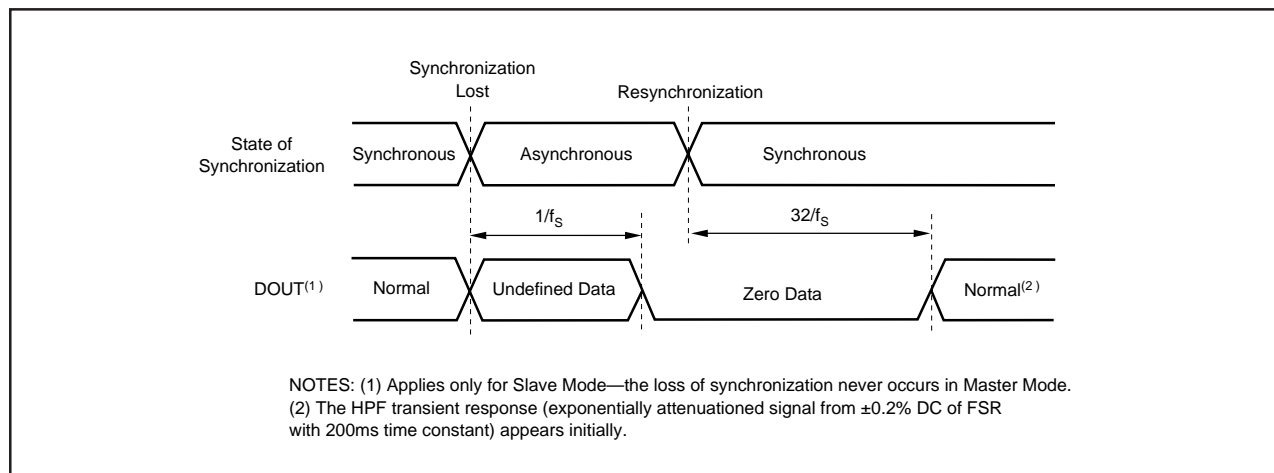


FIGURE 10. ADC Output When Synchronization is Lost and for Resynchronization.

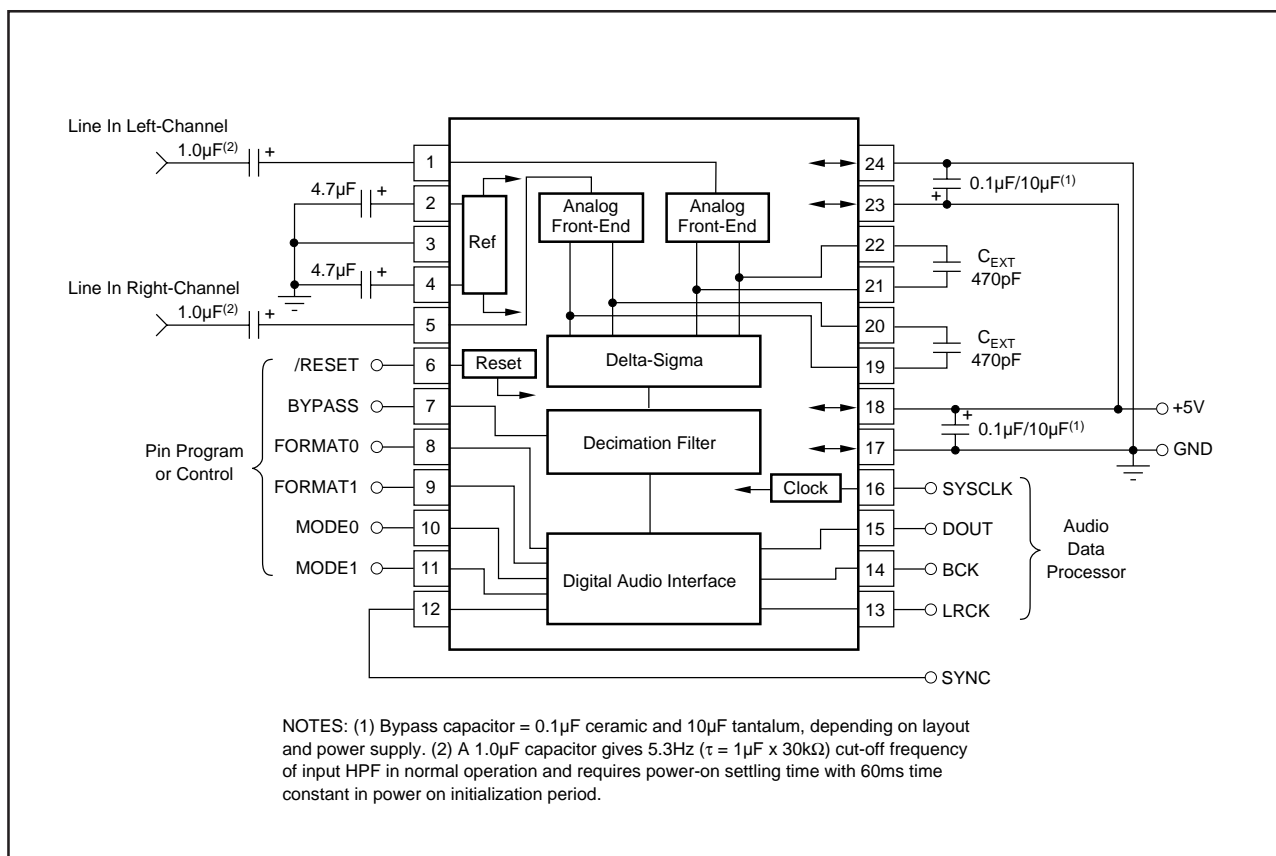


FIGURE 11. Typical Circuit Connection.

### V<sub>IN</sub> PINS

A 1.0µF tantalum capacitor is recommended as an AC-coupling capacitor which establishes a 5.3Hz cut-off frequency. If a higher full-scale input voltage is required, the input voltage range can be increased by adding a series resistor to the V<sub>IN</sub> pins.

### V<sub>REF</sub> INPUTS

A 4.7µF tantalum capacitor is recommended between V<sub>REF1</sub>, V<sub>REF2</sub>, and REFCOM to ensure low source impedance for the ADC's references. These capacitors should be located as close as possible to the V<sub>REF1</sub> or V<sub>REF2</sub> pin to reduce dynamic errors on the ADC's references. The REFCOM pin should also be connected directly to AGND under the parts.

### C<sub>INP</sub> and C<sub>INN</sub> INPUTS

A 470pF to 1000pF film capacitor is recommended between C<sub>INPL</sub> and C<sub>INNL</sub>, C<sub>INPR</sub> and C<sub>INNPR</sub> to create an anti-aliasing filter, which will have an 170kHz to 80kHz cut-off frequency. These capacitors should be located as close as possible to the C<sub>INP</sub> and C<sub>INN</sub> pins to avoid introducing unexpected noise or dynamic errors into the delta-sigma modulator.

### DOUT, BCK, LRCK, FSYNC PINS

The DOUT, BCK, LRCK and FSYNC pins in Master Mode have a large load drive capability, but locating the buffer near the PCM1800 and minimizing the load capacitance is recommended in order to minimize the digital analog crosstalk and to maximize dynamic performance potential.

### SYSTEM CLOCK

The quality of the system clock can influence dynamic performance in the PCM1800. The duty cycle, jitter, and threshold voltage at the system clock input pin must be carefully managed. When power is supplied to the part, the system clock, bit clock (BCK), and a word clock (LRCK) should also be supplied simultaneously. Failure to supply the audio clocks will result in a power dissipation increase of up to three times normal dissipation and may degrade long-term reliability if the maximum power dissipation limit is exceeded.

### RSTB Control

If the capacitance between V<sub>REF1</sub> and V<sub>REF2</sub> exceeds 4.7µF, an external reset control delay time circuit must be used.

## PACKAGING INFORMATION

ORDERABLE DEVICE	STATUS(1)	PACKAGE TYPE	PACKAGE DRAWING	PINS	PACKAGE QTY
PCM1800E	ACTIVE	SSOP	DB	24	58
PCM1800E/2K	ACTIVE	SSOP	DB	24	2000

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2003, Texas Instruments Incorporated