

VOLTAGE CONTROLLED OSCILLATOR

TOM9300

25 - 50 MHz

Available as:
 TOM9300, 4 Pin TO-8 (T4)
 TON9300, 4 Pin Surface Mount (SM3)
 TOP9300, 4 Pin Flatpack (FP4)
 BXO9300, Connectorized Housing (H1)

Features

- Low Noise Bipolar Transistor
- Broad Tuning Range
- Operating Case Temp. -55 °C to + 85 °C
- Environmental Screening available

Specifications



CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = - 55 °C to + 85 °C
Frequency	25 - 50 MHz	25 - 50 MHz
Output Power (dBm)	+13	+10 Min.
Power Flatness (dB)	±0.5	±1.0 Max.
Tuning Voltage Range (v)	1 to 15	0 to 20
Tuning Voltage Sensitivity (MHz/V)	2.0	1 Min.
Harmonics (dBc)	-15	-10 Max.
Spurious (dBc)	<-80	- 80 Max.
3dB Modulation BW, Zg = 50 Ohm	—	.1MHz Min.
Pushing (MHz/V)	.20	.30 Max.
Pulling (MHz); 12dB RL	1.25	2.0 Max.
Frequency Drift (MHz/°C)	—	-.01 Max.
Power	Vdc	+15
	mA	13
		+15
		16 Max.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 20 Volts
 Maximum DC Tuning Voltage + 20 Volts
 Minimum DC Tuning Voltage 0 Volts

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

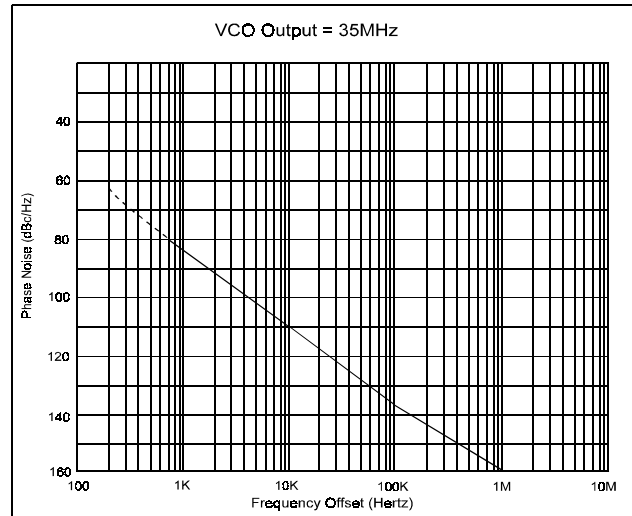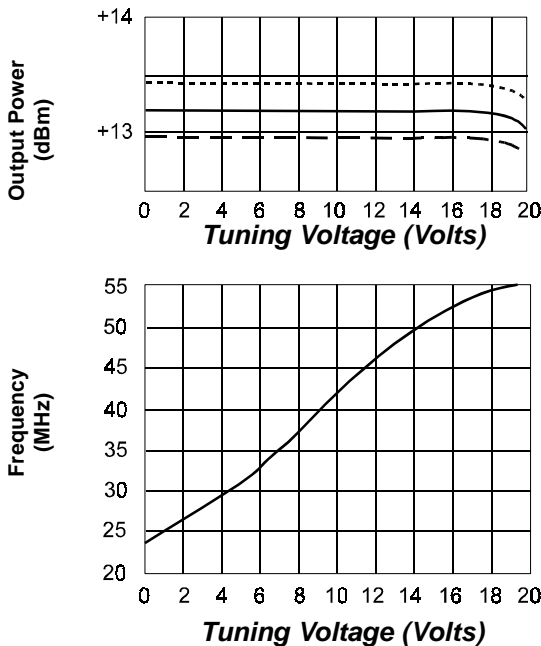

Notes:

1. Phase Noise is measured using the Aeroflex PN9000.
2. Worst case phase noise @ 100KHz offset across frequency range and temperature extremes is -130 dBc/Hz.

Legend ——— + 25 °C - - - +85 °C - - - -55 °C

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 •••• FAX 215-464-4001

04/11/02