


DIRECTIONAL COUPLERS

Designer's Kit K2-DBTC+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

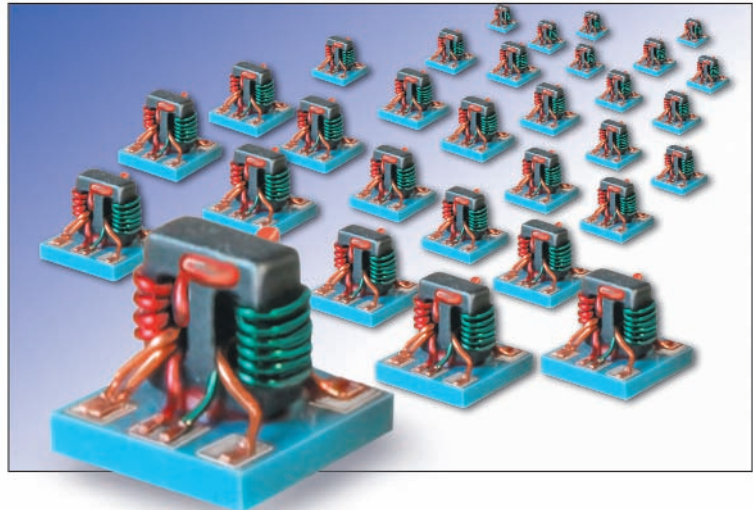

5 to 1500MHz

DBTC-75+ Features

- Very broadband, multi-octave, 75Ω
- Very flat 9,10,12,13,16 and 18dB coupling
- Temperature stable LTCC base
- All welded construction
- Micro-miniature leadless package
.150" x .150" x .150"



\$59.95
 only *ea. kit* (6 models, 5 of each, 30 total)

Kit K2-DBTC+ Electrical specifications of each model

Model	Freq. (MHz) $f_L - f_U$	Coupling (dB) Nom. Max. Flatness		Mainline Loss* (dB)				Directivity (dB)				VSWR (:1) Typ.	Input Power (W)										
				L		M		U		U ₁			L	MU	U ₁								
				Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.					Max.	Max.						
DBTC-9-4-75+	5 - 1200	9.3±0.5	±0.7	1.3	1.8	1.4	1.9	1.5	2.1	1.8	2.4	20	16	19	16	18	15	17	12	1.5	0.5	0.5	0.5
DBTC-10-4-75+	5 - 1000	10.5±0.5	±0.7	1.5	2.2	1.4	2.0	1.5	2.0	—	—	21	16	20	13	16	—	—	—	1.3	0.5	1.0	—
DBTC-12-4-75+	5 - 1200	12±0.5	±0.6	1.1	1.8	1.1	1.4	1.2	1.6	1.3	1.9	19	17	18	15	17	10	13	8	1.3	0.5	1.0	1.0
DBTC-13-5-75+	5 - 1000	13.2±0.5	±0.6	0.9	1.4	1.0	1.5	1.1	1.6	—	—	21	17	19	14	18	—	—	—	1.3	0.5	1.0	—
	1000 - 1500	13.6±0.5	±0.8	—	—	—	—	—	—	—	—	—	—	—	—	—	17	—	—	1.3	—	—	1.0
DBTC-16-5-75+	5 - 1000	16.3±0.5	±0.7	1.2	2.0	1.0	1.5	1.1	1.6	—	—	22	16	21	13	20	—	—	—	1.3	0.5	1.0	—
	1000 - 1500	16.8±0.7	±0.7	—	—	—	—	—	—	1.3	1.9	—	—	—	—	—	19	—	—	1.3	—	—	1.0
DBTC-18-4-75+	5 - 1000	18.2±0.5	±0.7	0.8	1.5	0.8	1.4	1.0	1.6	—	—	25	16	21	14	15	—	—	—	1.3	1.0	1.0	—

L = 5-50MHz, M = 50-500MHz, U = 500-1000MHz, For DBTC-13-5-75+ & DBTC-16-5-75+: U₁ = 1000-1500MHz,
 For DBTC-9-4-75+ & DBTC-12-4-75+: U₁ = 1000-1200MHz

Protected under U.S. Patents 6,140,887 & 6,784,521
 *Includes the theoretical power loss due to coupling.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
 M105895
 K2-DBTC+