


QUAD BUS TRANCEIVERS WITH 3-STATE OUTPUTS


The MC54/74F242 and MC54/74F243 are Quad Bus Transmitters/Receivers designed for 4-line asynchronous 2-way data communication between data buses.

- 2-Way Asynchronous Data Bus Communication
- Input Clamp Diodes Limit High-Speed Termination Effects
- ESD > 4000 Volts

MC54/74F242 (TOP VIEW)

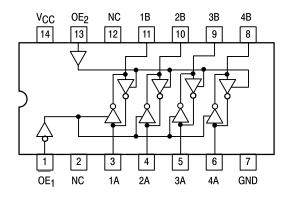


MC54/74F243 (TOP VIEW)

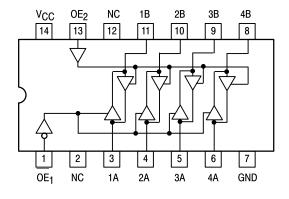

MC54/74F242 MC54/74F243

QUAD BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

FAST™ SCHOTTKY TTL

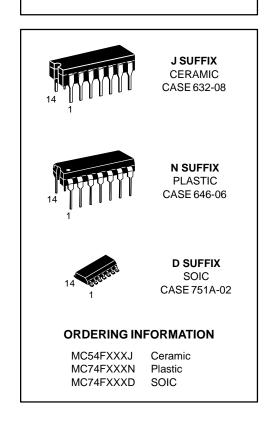

GUARANTEED OPERATING RANGES

Symbol	Parameter		Min	Тур	Max	Unit
Vcc	Supply Voltage	54,74	4.5	5.0	5.5	V
TA	Operating Ambient Temperature Range	54	- 55	25	125	°C
		74	0	25	70	
ЮН	Output Current — High	54			-12	mA
		74			–15	
lOL	Output Current — Low	54			48	mA
		74			64	

MC54/74F242 • MC54/74F243

FUNCTION TABLE - MC54/74F242

Inp	uts		Inputs		
OE ₁	D	Output	OE ₂	D	Output
L	L	Н	L	Х	Z
L	Н	L	L	Х	Z
Н	Х	Z	Н	L	Н
Н	Х	Z	Н	Н	L

FUNCTION TABLE - MC54/74F243

Inp	uts		Inputs		
OE ₁	D	Output	OE ₂	D	Output
L	L	L	L	Х	Z
L	н	Н	L	Х	Z
Н	x	Z	н	L	L
Н	x	Z	н	Н	Н

 $\label{eq:Hamiltonian} H = HIGH \ \mbox{Voltage Level} \ ; \ \ \mbox{$X = Don't Care}; \ \ \mbox{$Z = HIGH Impedance}$

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

			Limits					
Symbol	Parameter		Min	Тур	Max	Unit	Test Co	onditions
VIH	Input HIGH voltage		2.0			V	Guaranteed Input H	IIGH Voltage
V _{IL}	Input LOW Voltage				0.8	V	Guaranteed Input L	OW Voltage
VIK	Input Clamp Diode Voltage				-1.2	V	$I_{IN} = -18 \text{ mA}$	V _{CC} = MIN
		54	2.0			V	I _{OH} = -12 mA	V _{CC} = 4.50 V
Vон	Output HIGH Voltage	74	2.0			V	I _{OH} = -15 mA	V _{CC} = 4.50 V
		54, 74	2.4			V	I _{OH} = -3.0 mA	V _{CC} = 4.50 V
		74	2.7			V	I _{OH} = -3.0 mA	V _{CC} = 4.75 V
VOL	Output LOW Voltage	54			0.55	V	I _{OL} = 48 mA	V _{CC} = MIN
		74			0.55	V	I _{OL} = 64 mA	1
lozh	Output Off Current HIGH				70	μΑ	V _{OUT} = 2.7 V	VCC = MAX
					1.0	mA	V _{OUT} = 5.5 V	1
lozL	Output Off Current LOW				-1.6	mA	V _{OUT} = 0.5 V	V _{CC} = MAX
		Enable			20	μΑ	V _{IN} = 2.7 V	
lін	Input HIGH Current	Data			70	μΑ	V _{IN} = 2.7 V	V _{CC} = MAX
		Data			1.0	mA	V _{IN} = 5.5 V	1
		Enable			0.1	mA	V _{IN} = 7.0 V	
I _{IL}	Input LOW Current	Enable			-1.0	mA	V _{IN} = 0.5 V	VCC = MAX
		Data			-1.6	mA	V _{IN} = 0.5 V]
los	Output Short Circuit Current	74	-100		-225	mA	V _{OUT} = 0 V	V _{CC} = MAX
	(Note 2)	54	-100		-275	mA	1	
IССН	Power Supply	F242			60	mA	Outputs	V _{CC} = MAX
	Current HIGH	F243			80	mA	HIGH	
ICCL	Power Supply	F242			75	mA	Outputs	V _{CC} = MAX
	Current LOW	F243			90	mA	LOW	
ICCZ	Power Supply	F242			75	mA	Outputs	V _{CC} = MAX
	Current OFF	F243			90	mA	OFF	

NOTES:

^{1.} For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

^{2.} Not more than one output should be shorted at a time, nor for more than 1 second.

MC54/74F242 • MC54/74F243


AC CHARACTERISTICS - MC54/74F242

		54/74F		54F		74F		
		T _A =	+25°C	T _A = -55°C to +125°C		T _A = 0°C to 70°C		
		V _{CC} = +5.0 V		V _{CC} = 5.0 V ±10%		$V_{CC} = 5.0 \text{ V} \pm 10\%$		
		C _L = 50 pF		50 pF	C _L = 50 pF			
Symbol	Parameter	Min	Max	Min	Max	Min	Max	Unit
^t PLH	Propagation Delay,	2.5	7.0	2.5	9.0	2.5	8.0	ns
tPHL	Data to Output	1.5	4.7	1.5	6.0	1.5	5.7	
^t PZH	Output Enable Time	2.0	4.7	2.0	6.5	2.0	5.7	ns
^t PZL		4.0	9.0	4.0	12	4.0	10	
tPHZ	Output Disable Time	2.0	5.3	2.0	6.5	2.0	6.3	ns
tPLZ		1.5	6.5	1.5	12.5	1.5	8.0	

AC CHARACTERISTICS - MC54/74F243

		54/74F		54F		74F		
		T _A =	+25°C	T _A = -55°C to +125°C		T _A = 0°C to 70°C		
		V _{CC} = +5.0 V		V _{CC} = 5.0 V ±10%		$V_{CC} = 5.0 V \pm 10\%$		
		C _L = 50 pF		C _L = 50 pF		C _L = 50 pF		
Symbol	Parameter	Min	Max	Min	Max	Min	Max	Unit
^t PLH	Propagation Delay,	2.5	5.2	2.0	6.5	2.0	6.2	ns
^t PHL	Data to Output	2.5	5.2	2.0	8.5	2.0	6.5	
^t PZH	Output Enable Time	2.0	5.7	2.0	8.0	2.0	6.7	ns
^t PZL		2.0	7.5	2.0	10.5	2.0	8.5	
^t PHZ	Output Disable Time	2.0	6.0	1.5	7.5	1.5	7.0	ns
tPLZ		1.5	6.5	2.0	12.5	1.5	7.5	


Case 751A-02 D Suffix 14-Pin Plastic **SO-14**

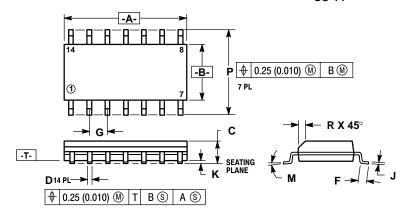

- DIMENSIONS "A" AND "B" ARE DATUMS AND
 "T" IS A DATUM SURFACE.
- 2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.
 DIMENSION A AND B DO NOT INCLUDE MOLD
- PROTRUSION.
 MAXIMUM MOLD PROTRUSION 0.15 (0.006)
- PER SIDE. 751A-01 IS OBSOLETE, NEW STANDARD

	MILLIM	ETERS	INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	8.55	8.75	0.337	0.344	
В	3.80	4.00	0.150	0.157	
С	1.35	1.75	0.054	0.068	
D	0.35	0.49	0.014	0.019	
F	0.40	1.25	0.016	0.049	
G	1.27	BSC	0.050 BSC		
J	0.19	0.25	0.008	0.009	
K	0.10	0.25	0.004	0.009	
M	0°	7°	0°	7°	
P	5.80	6.20	0.229	0.244	
R	0.25	0.50	0.010	0.019	

Case 632-08 J Suffix 14-Pin Ceramic Dual In-Line

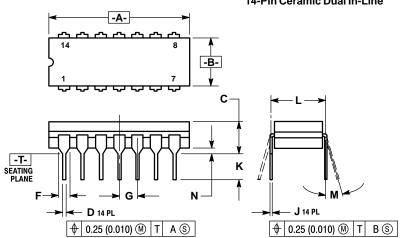

- IOTES:

 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

 2. CONTROLLING DIMENSION: INCH.


 3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.

 4. DIM F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

 5. 632-01 THRU -07 OBSOLETE, NEW STANDARD 632-0.8

	MILLIM	ETERS	INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	19.05	19.94	0.750	0.785	
В	6.23	7.11	0.245	0.280	
С	3.94	5.08	0.155	0.200	
D	0.39	0.50	0.015	0.020	
F	1.40	1.65	0.055	0.065	
G	2.54	BSC	0.100 BSC		
J	0.21	0.38	0.008	0.015	
K	3.18	4.31	0.125	0.170	
L	7.62 BSC		0.300	BSC	
M	0°	15°	0°	15°	
N	0.51	1.01	0.020	0.040	

Case 646-06 N Suffix 14-Pin Plastic

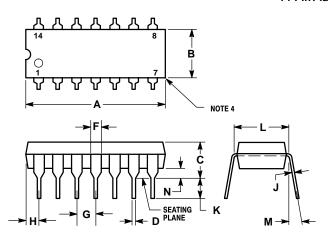

NOTES:

- 1. LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.

- ROUNDED CORNERS OPTIONAL. 646-05 OBSOLETE, NEW STANDARD 646-06.

	MILLIM	ETERS	INCHES		
DIM	MIN MAX		MIN	MAX	
Α	18.16	19.56	0.715	0.770	
В	6.10	6.60	0.240	0.260	
С	3.69	4.69	0.145	0.185	
D	0.38	0.53	0.015	0.021	
F	1.02	1.78	0.040	0.070	
G	2.54	BSC	0.100 BSC		
Н	1.32	2.41	0.052	0.095	
J	0.20	0.38	0.008	0.015	
K	2.92	3.43	0.115	0.135	
L	7.62 BSC		0.300 BSC		
М	0°	10°	0°	10°	
N	0.39	1.01	0.015	0.039	

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.

ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

