


# SHOULDER WASHERS

## High Temperature Machine Screw Insulators

- Use with TO-3, TO-3P, TO-66, TO-218, TO-220 and TO-247 Devices
- 260°C maximum recommended service temperature
- Chemically inert (no known solvents under 200°C)

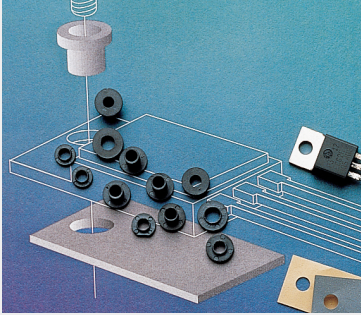

### Material Specifications:

White or Natural Nylon, per ASTM D4066  
PA111, UL Rated 94V-2

**Oxygen Rating Index:** Over 28%

### Standard Drawing Tolerances:


(unless otherwise indicated)

Fractions:  $\pm 1/64$  (0.4) .XX =  $\pm 0.01$  (0.25)

.X =  $\pm 0.10$  (2.5) .XXX =  $\pm 0.005$  (0.13)


**405-160**

Color: White or Natural, Price Code: A

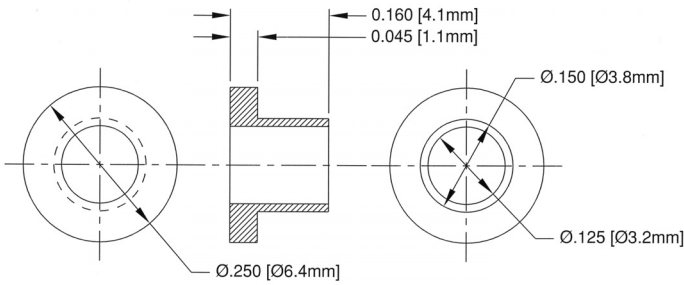

**413-030**

Color: White or Natural, Price Code: A

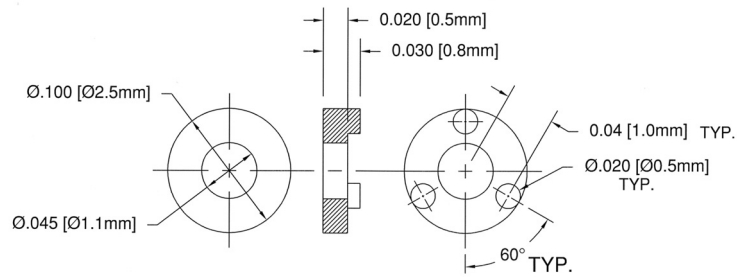

**419-040**

Color: White or Natural, Price Code: A

