



BOURNS®

Features

- Bushing mount
- Excellent resolution
- High rotational life
- Non-standard features and specifications available

6637 - Precision Potentiometer

Electrical Characteristics¹

| | |
|--|-----------------------|
| Standard Resistance Range..... | 1 K to 100 K ohms |
| Total Resistance Tolerance | ±10 % |
| Independent Linearity | ±1 % |
| Effective Electrical Angle | 340° ± 3° |
| End Voltage | 0.5 % maximum |
| Output Smoothness | 0.1 % maximum |
| Dielectric Withstanding Voltage (MIL-STD-202, Method 301) Sea Level | 750 VAC minimum |
| Power Rating (Voltage Limited By Power Dissipation or 300 VAC, Whichever is Less) +70 °C..... | 1 watt |
| +125 °C..... | 0 watt |
| Insulation Resistance (500 VDC)..... | 1,000 megohms minimum |
| Resolution..... | Essentially infinite |

Environmental Characteristics¹

| | |
|--|------------------------------|
| Operating Temperature Range..... | +1 °C to +125 °C |
| Storage Temperature Range..... | -65 °C to +125 °C |
| Temperature Coefficient Over Storage Temperature Range | ±500 ppm/°C maximum |
| Vibration | 15 G |
| Wiper Bounce..... | 0.1 millisecond maximum |
| Total Resistance Shift | ±5 % maximum |
| Voltage Ratio Shift | ±0.5 % maximum |
| Shock | 50 G |
| Wiper Bounce..... | 0.1 millisecond maximum |
| Total Resistance Shift | ±5 % maximum |
| Voltage Ratio Shift | ±0.5 % maximum |
| Load Life..... | 1,000 hours, 1 watt |
| Total Resistance Shift | ±10 % maximum |
| Rotational Life (No Load) | 10,000,000 shaft revolutions |
| Total Resistance Shift | ±10 % maximum |
| Moisture Resistance (MIL-STD-202, Method 106) | |
| Total Resistance Shift | ±15 % maximum |
| IP Rating | IP 40 |

Mechanical Characteristics¹

| | |
|--|---|
| Mechanical Angle | Continuous |
| Torque (Starting & Running)..... | 0.40 N-cm (0.5 oz.-in.) maximum |
| Mounting..... | 170-200 N-cm (15-18 lb.-in.) maximum |
| Shaft Runout..... | 0.025 mm (0.001 in.) T.I.R. |
| Shaft End Play..... | 0.13 mm (0.005 in.) T.I.R. |
| Shaft Radial Play | 0.13 mm (0.005 in.) T.I.R. |
| Backlash | 0.1 ° maximum |
| Weight..... | 16 gm |
| Terminals..... | Rear turret type |
| Soldering Condition | Recommended hand soldering using Sn95/Ag5 no clean solder, 0.025 " wire diameter. Maximum temperature 399 °C (750 °F) for 3 seconds. No wash process to be used with no clean flux. |
| Marking | Manufacturer's name and part number, resistance value and tolerance, linearity tolerance, wiring diagram, and date code. |
| Ganging (Multiple Section Potentiometers)..... | 1 up maximum |
| Hardware..... | One lockwasher (H-37-2) and one mounting nut (H-38-2) is shipped with each potentiometer. |

¹At room ambient: +25 °C nominal and 50 % relative humidity, except as noted.

Recommended Part Numbers


| Part Numbers | Resistance (Ω) |
|--------------------|-------------------|
| 6637S-1-102 | 1,000 |
| 6637S-1-502 | 5,000 |
| 6637S-1-103 | 10,000 |

BOLDFACE LISTINGS ARE IN STOCK AND READILY AVAILABLE THROUGH DISTRIBUTION.


FOR OTHER OPTIONS CONSULT FACTORY.

Product Dimensions

6637
7/8 " (22 mm) DIA.

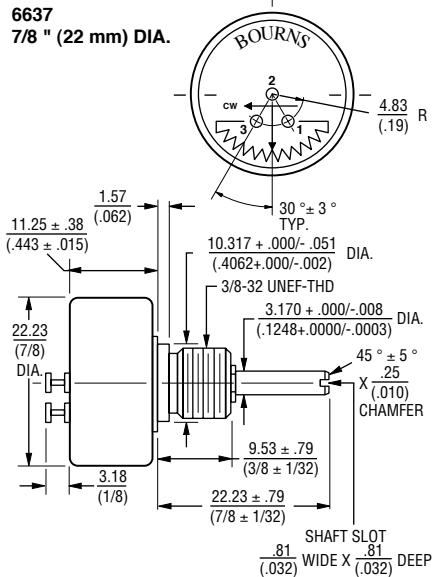

NOTE: SHAFT SUPPORTED BY FRONT SLEEVE BEARING.

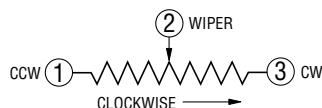

DIMENSIONS: MM
(IN.)

REV. 06/06

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex
Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.