


Erbium-Doped Fiber Amplifier for Digital Applications

Key Features

- Operating wavelength window: 1530-1560 nm
- Saturation output power: +13 dBm
- Noise figure, typ. <7.0 dB
- Serial (RS-232) interface with parallel alarms

Applications

- Single channel digital applications (SDH/SONET)

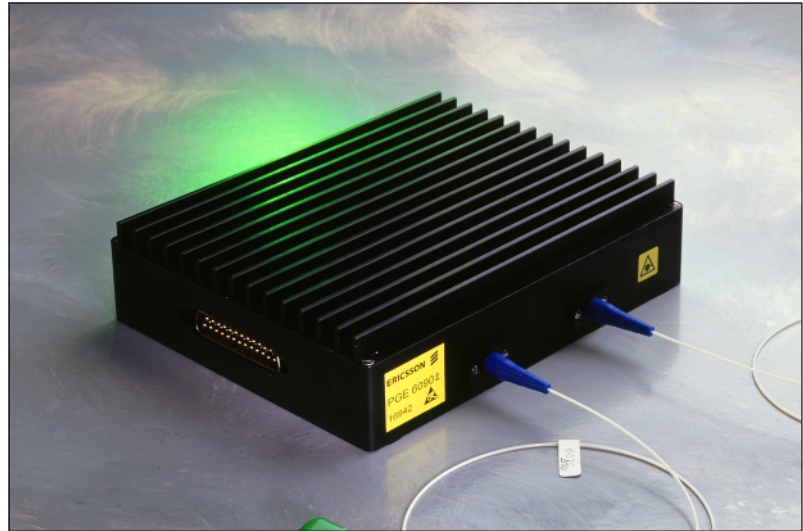

Description

The PGE 608 02 is an integrated, output power-locked amplifier. It has optically isolated input and output ports as well as input and output power monitoring. The serial and parallel interface is provided through a DB-25 electrical connector. The modules are based on industry standard platforms and are optimized for single channel SDH/SONET applications.

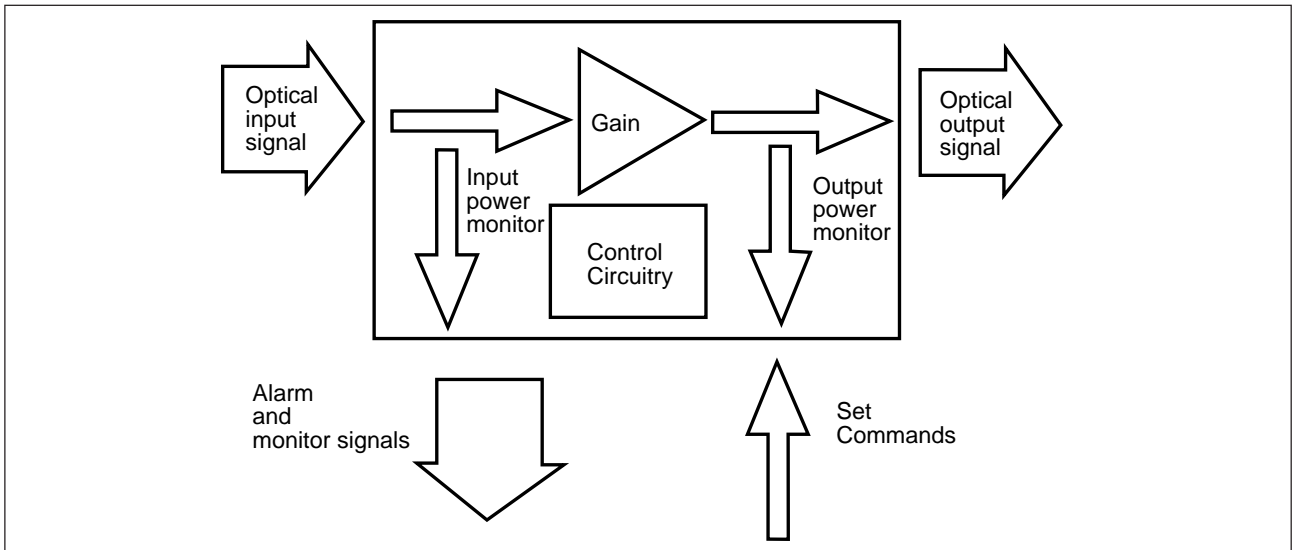


Figure 1. Block diagram

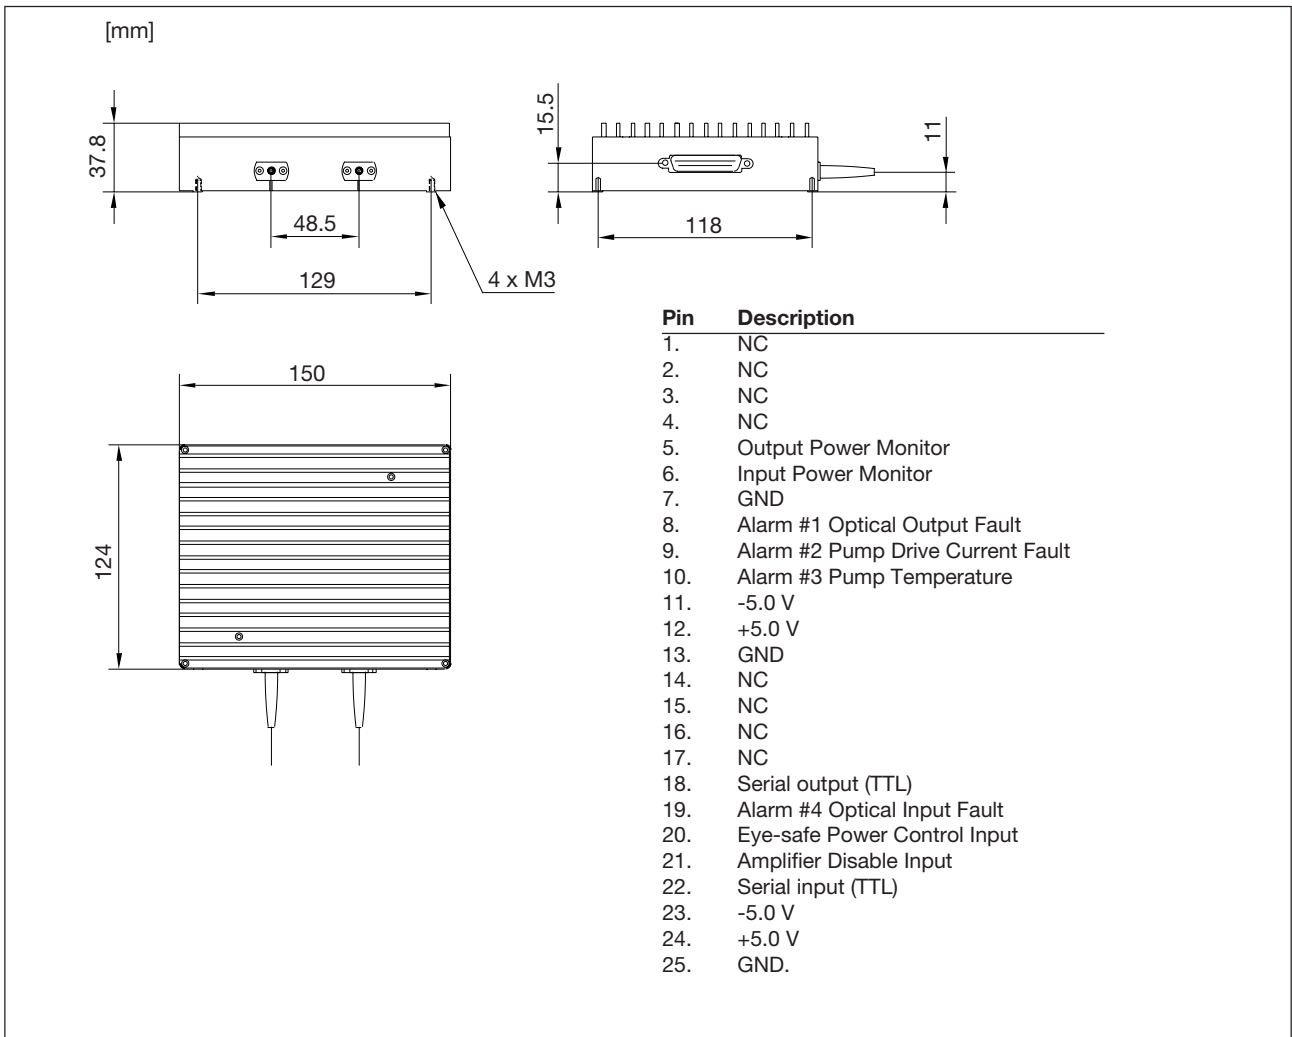


Figure 2. Mechanical outline and pin description

Optical Characteristics

Electrical and optical characteristics at recommended operating conditions, unless otherwise noted.

| Parameter | Conditions | Symbol | Min | Typ | Max | Unit |
|--------------------------|---|-------------|------|-----------|------|------|
| Operating Wavelength | | λ_L | 1530 | | 1560 | nm |
| Input Power | | P_{in} | | -6 | | dBm |
| Output Power | At 1550 nm, $P_{in} = -6$ dBm, at RT | P_{out} | 12.5 | 13.0 | 13.5 | dBm |
| Input/Output Return Loss | Over T_c and λ_L . EDFA turned on. $P_{in} = -6$ dBm | IRL/ORL | | ≥ 28 | | dB |
| Noise Figure | < -6 dBm Input, at RT | NF | | < 7.0 | | dB |
| Small Signal Gain | | | | 25 | | dB |

Electrical Characteristics

| Parameter | Conditions | Symbol | Min | Typ | Max | Unit |
|-------------------------|---------------------------------------|--------|-------|-------|-------|------|
| Operating Current | Positive Voltage | | | | 2 | A |
| | Negative Voltage | | | | 1 | A |
| Operating Voltage | Pins # 12 and 24 | | 4.75 | 5.00 | 5.50 | V |
| | Pins #11 and 23 | | -5.50 | -5.00 | -4.75 | V |
| Ripple and Noise | On both Positive and Negative Voltage | | | | 2% PP | |
| Transients – Positive V | Max. Duration 75 ms | | 4.5 | | 6.0 | V |
| Transients – Negative | Max. Duration 75 ms | | -6.0 | | -4.5 | V |
| Power Dissipation | Over operating temperature and time | | | | 10 | W |

Operating Conditions

| Parameter | Symbol | Min | Typ | Max | Unit |
|----------------------------|------------|-----|-----|-----|------|
| Operating Case Temperature | T_{Case} | 0 | | 65 | °C |

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit |
|---------------------|--------|-----|-----|------|
| Storage Temperature | | -40 | 75 | °C |

CAUTION: Stresses outside those listed in "Absolute Maximum Ratings" may cause permanent damage to the device.

Handling Precautions

This device may be damaged as a result of electrostatic discharge (ESD). Take proper precautions during both handling and testing. This typically includes grounded wrist wraps, workbenches and floor mats in ESD controlled areas. Semiconductor devices may be damaged by current surges, use appropriate transient protection.

Quality Assurance


Ericsson Microelectronics commitment to quality has been proven through a decade of semiconductor device production and has been confirmed to ISO 9001. Opto product qualification is made according to the intention of applicable Telcordia standards.

Connector Options

SC/SPC

SC/APC

(Other connectors available on request)

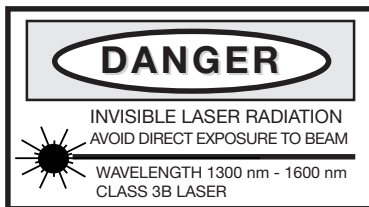

Information given in this data sheet is believed to be accurate and reliable. However no responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Microelectronics. These products are sold only according to Ericsson Microelectronics' general conditions of sale, unless otherwise confirmed in writing.

Product specifications subject to change without notice.

Ericsson Microelectronics AB

SE-164 81 Kista, Sweden

Telephone: +46 8 757 50 00

www.ericsson.com/microelectronics

For local sales contacts, please refer to our website or call: Int + 46 8 757 47 00, Fax: +46 8 757 47 76

1522-PGE 608 02 Rev. E

© Ericsson Microelectronics AB, October 2000