



## SS115

### 1.0 AMP. Surface Mount Schottky Barrier Rectifiers



Voltage Range  
150 Volts  
Current  
1.0 Ampere


#### Features

- ✧ For surface mounted application
- ✧ Metal to silicon rectifier, majority carrier conduction
- ✧ Low forward voltage drop
- ✧ Easy pick and place
- ✧ High surge current capability
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-O
- ✧ Epitaxial construction
- ✧ High temperature soldering: 260°C/ 10 seconds at terminals

#### Mechanical Data

- ✧ Case: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 12mm tape per EIA STD RS-481
- ✧ Weight: 0.064 gram

#### SMA/DO-214AC

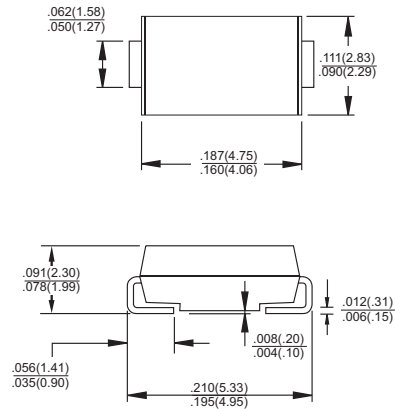

Dimensions in inches and (millimeters)

#### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SS115	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	150	V
Maximum RMS Voltage	$V_{RMS}$	105	V
Maximum DC Blocking Voltage	$V_{DC}$	150	V
Maximum Average Forward Rectified Current at $T_L$ (See Fig. 1)	$I_{AV}$	1.0	A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30	A
Maximum Instantaneous Forward Voltage (Note 1) @ 25°C 1.0A @ 125°C 1.0A @ 25°C 2.0A @ 125°C 2.0A	$V_F$	0.82 0.67 0.89 0.75	V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	0.05 0.5	mA mA
Typical Junction Capacitance (Note 3)	$C_j$	50	pF
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	20	°C/W
Operating Temperature Range	$T_J$	-65 to +150	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle

2. Measured on P.C.Board with 0.2 x 0.2" (5.0 x 5.0mm) Copper Pad Areas.

3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C

## RATINGS AND CHARACTERISTIC CURVES (SS115)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

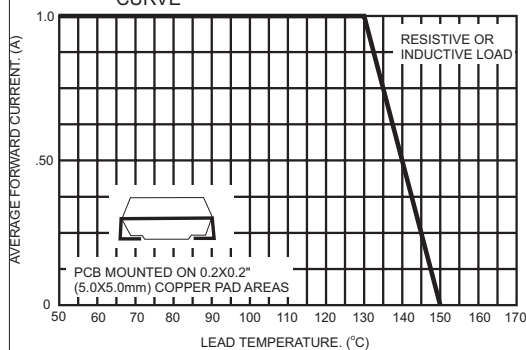


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

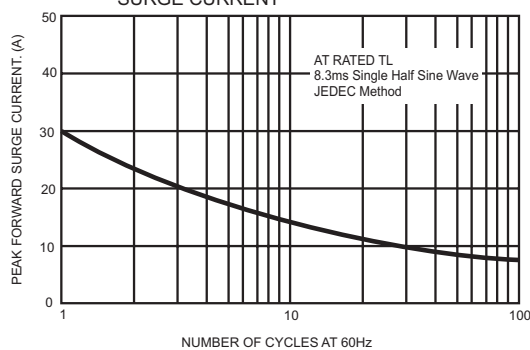


FIG.3- TYPICAL FORWARD CHARACTERISTICS

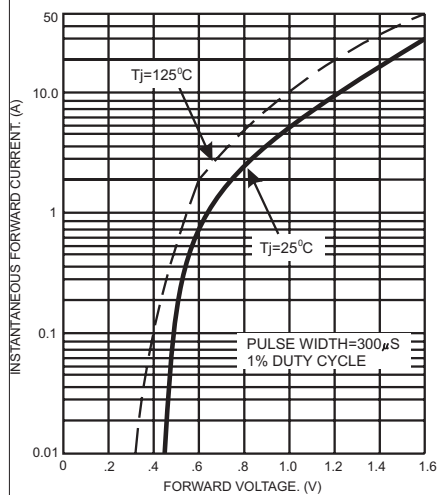


FIG.4- TYPICAL REVERSE CHARACTERISTICS

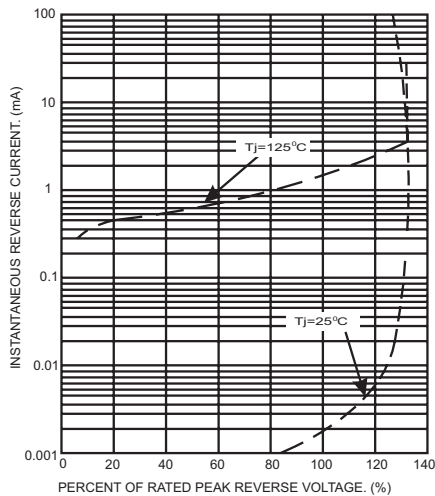


FIG.5- TYPICAL JUNCTION CAPACITANCE

