



White Power LED

PART NO: 30-01UWC/1B

Device Number: DLE-300-014 REV: 1.1

ECN: _____ Page: 2/5

■ Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color: $x=0.29, y=0.30$

■ Descriptions

The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.

■ Applications

- OA Equipment
- Backlighting of LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps



White Power LED

PART NO: 30-01UWC/1B

Device Number: DLE-300-014 REV: 1.1

ECN: _____ Page: 3/5

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Forward Current	I _F	30	mA
Pulse Forward Current ^{*1}	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	120	mW
Operating Temperature	T _{opr}	-30 ~ +80	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature ^{*2}	T _{sol}	260	°C

*1:I_{FP} Conditions--Pulse Width ≤ 10msec and Duty ≤ 1/10.

*2:Soldering time ≤ 5 seconds.

■ Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Forward Voltage	V _F	I _F =20mA	--	3.6	4.0	V
Reverse Current	I _R	V _R =5V	--	--	10	μA
Total Flux	Φ _v	I _F =20mA	520	780	--	mlm
Viewing Angle	2θ 1/2	I _F =20mA	--	50	--	deg
Chromaticity ^{*1}	x	I _F =20mA	--	0.29	--	
	y		--	0.30	--	

*The C.I.E. 1931 chromatically diagram.

*The products are sensitive to static electricity and care must be fully taken when handling products.



White Power LED

PART NO: 30-01UWC/1B


Device Number: DLE-300-014 REV: 1.1

ECN: _____ Page: 4/5

■ Chromaticity Coordinates Specifications for Bin Grading

Rank	Chromaticity Coordinates				
	A	x	0.220	0.220	0.260
	y	0.220	0.280	0.310	0.250
B	x	0.260	0.260	0.290	0.290
	y	0.250	0.310	0.330	0.270
C	x	0.290	0.290	0.320	0.320
	y	0.270	0.330	0.350	0.290
D	x	0.320	0.320	0.360	0.360
	y	0.290	0.350	0.380	0.320
* Tolerance		$x \pm 0.02$			$y \pm 0.02$

■ CIE Chromaticity Diagram

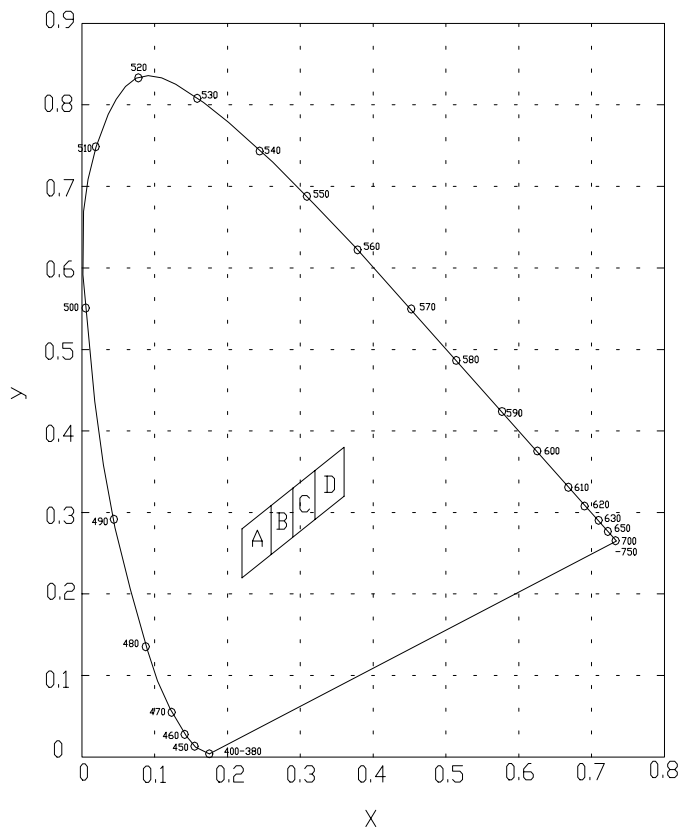



White Power LED



PART NO: 30-01UWC/1B

Device Number: DLE-300-014 REV: 1.1


ECN: _____ Page: 5/5

Typical Electro-Optical Characteristics Curves


● Forward Current vs. Ambient Temperature ● Forward Voltage vs. Ambient Temperature

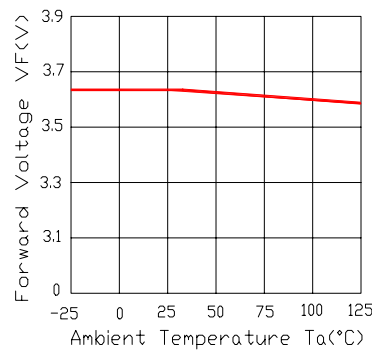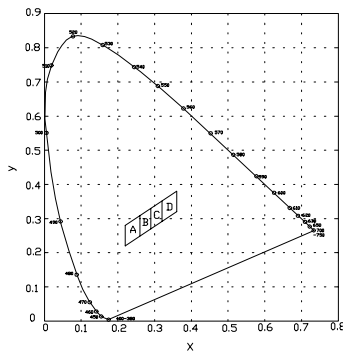


● Relative Intensity vs. Ambient Temperature

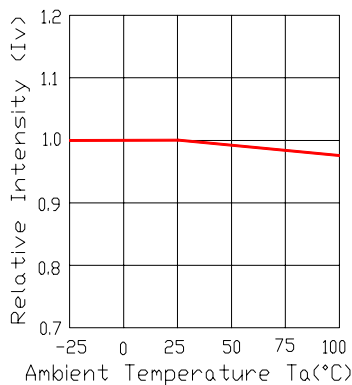

● Forward Current vs. Forward Voltage

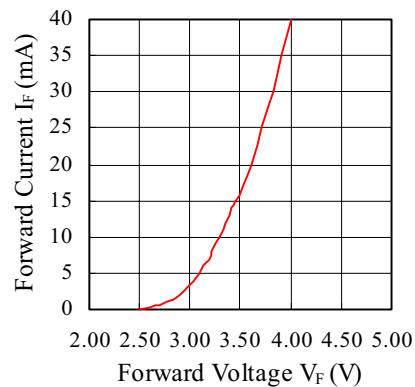

● Directivity Radiation Angle: 50 degree (Typ.)

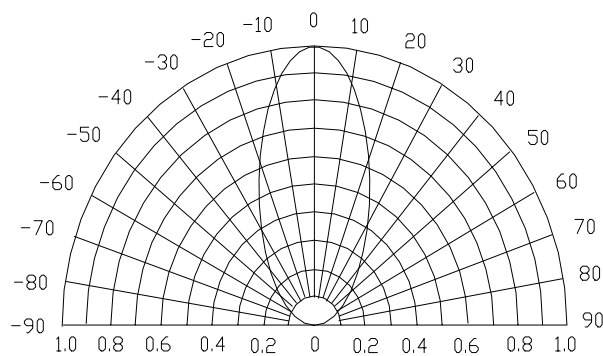

● Luminous Spectrum (T_a = 25 °C)

