



October 2001
Revised October 2001

FSLV34X245 32-Bit Bus Switch (Preliminary)

General Description

The Fairchild Switch FSLV34X245 provides 32-bits of high-speed CMOS bus switching in a standard 245 pin-out. The low On Resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise.

The device is organized as an 32-bit switch. When \overline{OE} is LOW, the switch is ON and Port A is connected to Port B. When \overline{OE} is HIGH, the switch is OPEN and a High-Impedance state exists between the two ports.


Features

- 5 Ω switch connection between two ports
- Minimal propagation delay through the switch
- Low I_{CC}
- Zero bounce in flow-through mode
- Low Power-Off leakage currents
- 32-bit version of FSLV3245
- Packaged in "slim line" 80-lead package


Ordering Code:

Order Number	Package Number	Package Description
FSLV34X245QSP	MQA80A	80-Lead, QVSOP, JEDEC MO-154, 0.150" Wide

Connection Diagram

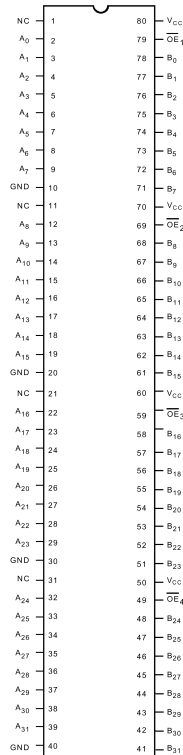

Logic Diagram

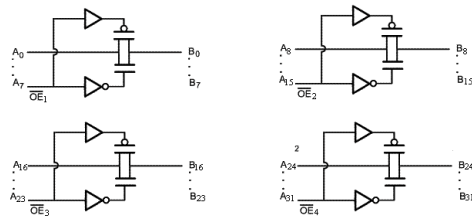

Pin Descriptions

Pin Name	Description
\overline{OE}	Bus Switch Enable
A	Bus A
B	Bus B
NC	No Connect

Truth Table

Input \overline{OE}	Function
L	Connect
H	Disconnect

FSLV34X245 32-Bit Bus Switch (Preliminary)

Absolute Maximum Ratings (Note 1)

Supply Voltage (V_{CC})	−0.5V to +4.6V
DC Switch Voltage (V_S)	−0.5V to +4.6V
DC Input Voltage (V_{IN}) (Note 2)	−0.5V to +4.6V
DC Input Diode Current (I_{IK}) $V_{IN} < 0V$	−50 mA
DC Output (I_{OUT}) Sink Current	128 mA
DC V_{CC} /GND Current (I_{CC}/I_{GND})	+/- 100 mA
Storage Temperature Range (T_{STG})	−65°C to +150 °C

Recommended Operating Conditions (Note 3)

Power Supply Operating (V_{CC})	3.0V to 3.6V
Control Input Voltage	0V to 3.6V
Switch Input Voltage	0V to 3.6V
Output Voltage (V_{OUT})	0V to 3.6V
Input Rise and Fall Time (t_r, t_f)	
Switch Control Input	0 ns/V to 4 ns/V
Switch I/O	0 ns/V to DC
Free Air Operating Temperature (T_A)	−40 °C to +85 °C

Note 1: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused control inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

Symbol	Parameter	V_{CC} (V)	$T_A = -40\text{ °C to }+85\text{ °C}$			Units	Conditions
			Min	Typ (Note 4)	Max		
V_{IK}	Clamp Diode Voltage	3.0			−1.2	V	$I_{IN} = -18\text{ mA}$
V_{IH}	HIGH Level Input Voltage	2.7 - 3.6	2.0			V	
		2.3 - 2.7	1.7				
V_{IL}	LOW Level Input Voltage	2.7 - 3.6			0.8	V	
		2.3 - 2.7			0.7		
I_I	Input Leakage Current	3.6			±1.0	μA	$0 \leq V_{IN} \leq 3.6V$
		0			10	μA	$V_{IN} = 3.6V$
I_{OFF}	OFF-STATE Leakage Current	0			±10.0	μA	$0 \leq A, B \leq V_{CC}$
I_{OZ}	OFF-STATE Leakage	3.6			±1	μA	$0.0V \leq A, B \leq 3.6V$
R_{ON}	Switch On Resistance (Note 5)	3.0		5	7	Ω	$V_{IN} = 0V, I_{IN} = 64\text{ mA}$
		3.0		5	7	Ω	$V_{IN} = 0V, I_{IN} = 30\text{ mA}$
		3.0		10	15	Ω	$V_{IN} = 2.4V, I_{IN} = 15\text{ mA}$
		3.0			20	Ω	$V_{IN} = 3.0V, I_{IN} = 15\text{ mA}$
		2.3		5	8	Ω	$V_{IN} = 0.0V, I_{IN} = 64\text{ mA}$
		2.3		5	8	Ω	$V_{IN} = 0.0V, I_{IN} = 30\text{ mA}$
		2.3		10	15	Ω	$V_{IN} = 1.7V, I_{IN} = 15\text{ mA}$
I_{CC}	Quiescent Supply Current	3.6			3	μA	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0$
ΔI_{CC}	Increase in I_{CC} per Input	3.6			300	μA	One Input at 3.0V Other Inputs at V_{CC} or GND

Note 4: Typical values are at $V_{CC} = 3.3V$ and $T_A = +25\text{ °C}$

Note 5: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

AC Electrical Characteristics

Symbol	Parameter	T _A = -40°C to +85°C R _U = R _D = 500Ω				Units	Conditions	Figure Number
		V _{CC} = 3.3 ± 3.0V		V _{CC} = 2.5V ± 0.2V				
		C _L = 50 pF		C _L = 30 pF				
		Min	Max	Min	Max			
t _{PHL} , t _{PLH}	Propagation Delay Bus to Bus (Note 6)		0.25		0.15	ns	V _I = OPEN	Figures 1, 2
t _{PZH} , t _{PZL}	Output Enable Time	1.0	4.5	1.0	4.8	ns	V _{CC} = 3.3V, V _I = 6V for t _{PZL} V _I = GND for t _{PZH} V _{CC} = 2.5V, V _I = 2 x V _{CC} for t _{PZL} V _I = GND for t _{PZH}	Figures 1, 2
t _{PHZ} , t _{PLZ}	Output Disable Time	1.0	4.5	1.0	4.8	ns	V _{CC} = 3.3V, V _I = 6V for t _{PLZ} V _I = GND for t _{PHZ} V _{CC} = 2.5V, V _I = 2 x V _{CC} for t _{PLZ} V _I = GND for t _{PHZ}	Figures 1, 2


Note 6: This parameter is guaranteed by design but is not tested. The bus switch contributes no propagation delay other than the RC delay of the typical On Resistance of the switch and the 50pF load capacitance, when driven by an ideal voltage source (zero output impedance).

Capacitance (Note 7)

Symbol	Parameter	Typ	Max	Units	Conditions
C_{IN}	Control Pin Input Capacitance	3	6	pF	$V_{CC} = 3.3\text{V}$
$C_{I/O \text{ OFF}}$	Input/Output Capacitance "OFF - State"	7	14	pF	$V_{CC}, \overline{OE} = 3.3\text{V}$

Note 7: $T_A = +25^{\circ}\text{C}$, $f = 1\text{ Mhz}$, Capacitance is characterized but not tested.

AC Loading and Waveforms




Note: C_L includes load and stray capacitance

Note: Input PRR = 1.0 MHz, t_W = 500 ns

Test	Switch
t_{PD}	Open
t_{PLZ}/t_{PZL}	V_I
t_{PHZ}/t_{PZH}	GND


FIGURE 1. AC Test Circuit

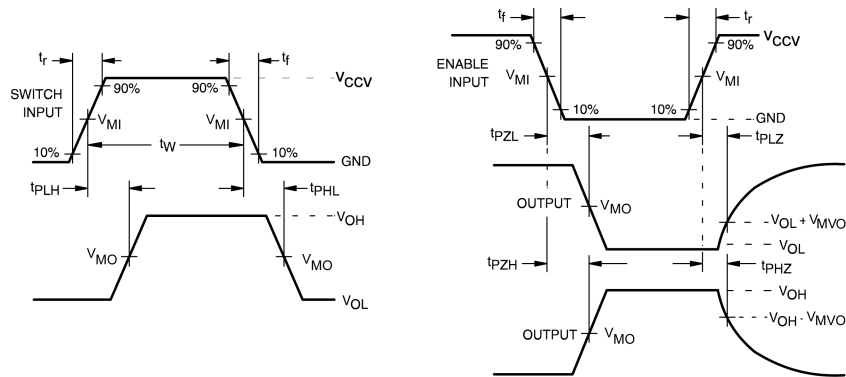

V_{CC}		
Symbol	$3.3V \pm 0.3V$	$2.5V \pm 0.2V$
V_{MI}	1.5V	$V_{CC}/2$
V_{MO}	1.5V	$V_{CC}/2$
V_{MVO}	0.3V	0.15V
V_I	6.0V	$2 \times V_{CC}$
V_{CCV}	3.0	V_{CC}
t_r/t_f	2 ns	2.5 ns

FIGURE 2. AC Waveforms

Physical Dimensions inches (millimeters) unless otherwise noted

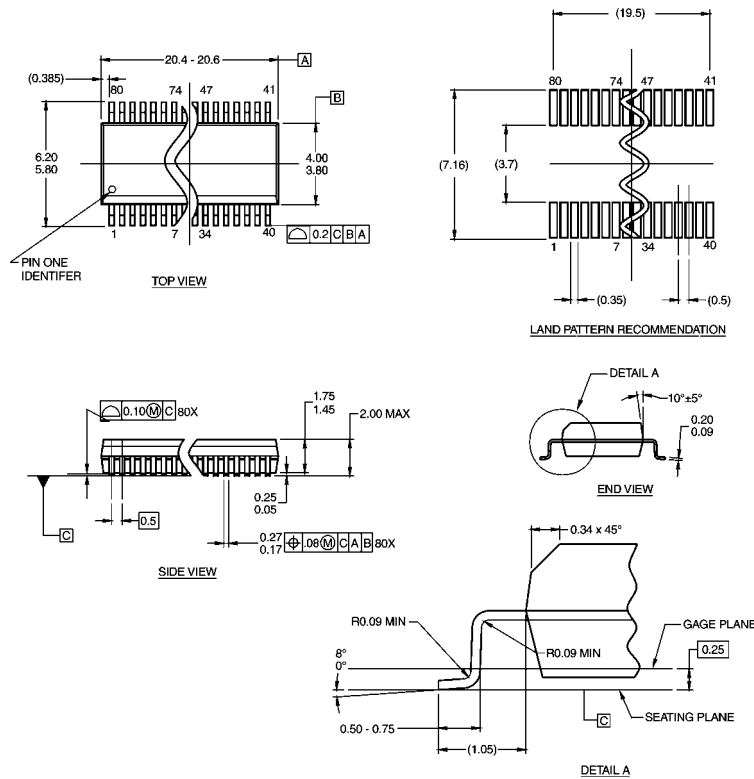

NOTES:

- THIS PACKAGE CONFORMS TO JEDEC MO-154 VERSION BC.
- ALL DIMENSIONS IN MILLIMETERS.
- DRAWING CONFORMS TO ASME Y14.5M-1994.
- DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

MQA80Arev1

80-Lead, QVSOP, JEDEC MO-154, 0.150" Wide Package Number MQA80A

Technology Description

The Fairchild Switch family derives from and embodies Fairchild's proven switch technology used for several years in its 74LVX3L384 (FST3384) bus switch product.

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com