



Description



Mechanical Dimensions

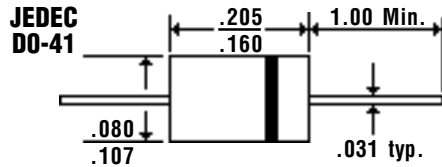


Features


- HIGH TEMPERATURE METALLURGICALLY BONDED CONSTRUCTION
- SINTERED GLASS CAVITY-FREE JUNCTION
- 1.0 AMP OPERATION @ $T_A = 75^\circ\text{C}$, WITH NO THERMAL RUNAWAY
- TYPICAL $I_R < 0.1 \mu\text{Amp}$

Electrical Characteristics @ 25°C.	1N4933GP . . . 37GP Series					Units
Maximum Ratings	1N4933GP	1N4934GP	1N4935GP	1N4936GP	1N4937GP	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	400	600	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	Volts
DC Blocking Voltage... V_{DC}	50	100	200	400	600	Volts
Average Forward Rectified Current... $I_{F(av)}$ Current 3/8" Lead Length @ $T_A = 75^\circ\text{C}$	1.0					Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3ms, 1/2 Sine Wave Superimposed on Rated Load	30					Amps
Forward Voltage @ Rated Forward Current and 25°C... V_F	1.2					Volts
DC Reverse Current... I_R @ Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$		5.0			μAmps
	$T_A = 125^\circ\text{C}$		100			μAmps
Typical Junction Capacitance... C_J (Note 1)	15					pF
Typical Thermal Resistance... $R_{\theta JA}$ (Note 2)	55					$^\circ\text{C} / \text{W}$
Typical Reverse Recovery Time... t_{RR} (Note 3)	200					nS
Operating & Storage Temperature Range... T_J, T_{STRG}	-65 to 175					$^\circ\text{C}$


Forward Current Derating Curve

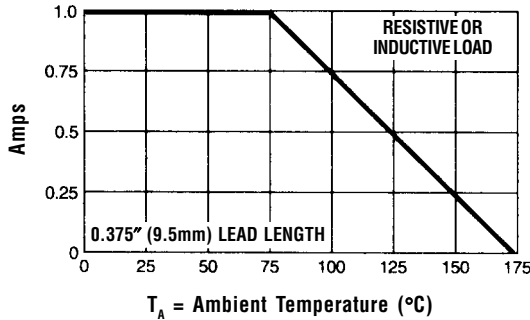


**Non-Repetitive
Peak Forward Surge Current**

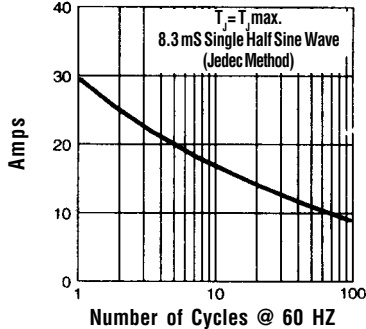


Typical Junction Capacitance

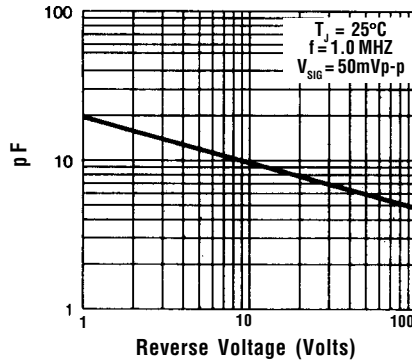

Typical Instantaneous Forward Characteristics

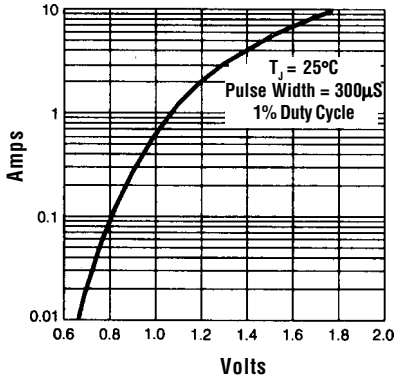

Typical Reverse Characteristics

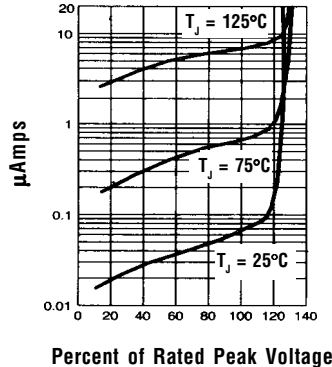

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
 2. Thermal Resistance from Junction to Ambient at 3/8" Lead Length, P.C. Board Mounted.
 3. Reverse Recovery Condition $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$.