


GI810 THRU GI818

GLASS PASSIVATED JUNCTION FAST SWITCHING RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.0 Ampere

PATENTED*

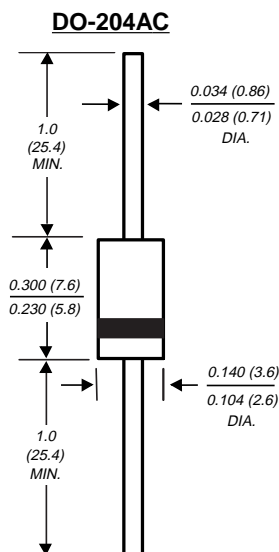

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by

Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

SUPERECTOR®

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ Fast switching for high efficiency
- ◆ 1.0 Ampere operation at $T_A=75^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AC molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.015 ounce, 0.4 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | GI 810 | GI 811 | GI 812 | GI 814 | GI 816 | GI 817 | GI 818 | UNITS |
|--|-----------------|--|--------|--------|--------|--------|--------|--------|---------------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum average forward rectified current $0.375"$ (9.5mm) lead length at $T_A=75^\circ\text{C}$ | $I_{(AV)}$ | 1.0 | | | | | | | Amp |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_A=75^\circ\text{C}$ | I_{FSM} | 30.0 | | | | | | | Amps |
| Maximum instantaneous forward voltage at 1.0A | V_F | 1.2 | | | | | | | Volts |
| Maximum DC reverse current at rated DC blocking voltage | I_R | $T_A=25^\circ\text{C}$: 10.0 $T_A=100^\circ\text{C}$: 100.0 | | | | | | | μA |
| Maximum reverse recovery time (NOTE 1) | t_{rr} | 750.0 | | | | | | | ns |
| Typical junction capacitance (NOTE 2) | C_J | 25.0 | | | | | | | pF |
| Typical thermal resistance (NOTE 3) | $R_{\theta JA}$ | 45.0 | | | | | | | $^\circ\text{C}/\text{W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -65 to +175 | | | | | | | $^\circ\text{C}$ |

NOTES:

- (1) Reverse recovery test conditions: $I_F=1.0\text{A}$, $V_R=30\text{V}$, $di/dt=50\text{A}/\mu\text{s}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient at $0.375"$ (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES GI810 THRU GI818

