

# 5mm SQUARE THIN TYPE ISOLATOR

## MODEL **ESI-5BB** [ ] **0906 M 01 - T**

(1)            (2)            (3)            (4)            (5)            (6)

(1) Series **ESI-5BB ; 2.0mm Height for 800MHz Band**

(2) Rotating Direction (R or L)


(3) Center Frequency

(4) M ; MHz

(5) Control No.

(6) T ; Taping

Blank;Bulk

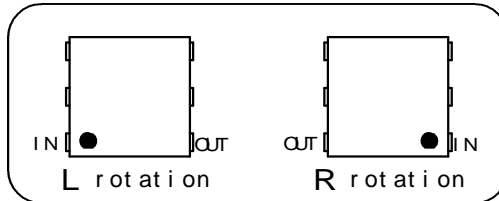

### Specification

Frequency (MHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	Attenuation		Handling Power Max. (W)	Reflection Power Max. (W)
				at 2f Min. (dB)	at 3f Min. (dB)		
887-925	0.70	12	1.6	15	15	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85

Impedance ; 50 ohms Typ.

### Shape & Size

