


D•XB, D•XBH SERIES SINGLE IN-LINE, HIGH CURRENT CHASSIS MOUNT BRIDGE RECTIFIERS

600 Volts 10 to 25 Amps Standard Recovery



| HVCA Number | Maximum Peak Reverse Voltage V_{RRM} Per Leg PRK, VPK | Max. Average Rectified Current Resistive Load @ T_c case I_{o} @ 60Hz $^{\circ}\text{C}$ | Max. Forward Peak Surge Current @ 8.3ms Superimposed I_{FM} (Surge) A_{PK} | Max. Reverse Current @PRV @ $25^{\circ}\text{C } T_A$ I_r $\mu\text{A dc}$ | Max. Forward Voltage @ $25^{\circ}\text{C } T_A$ V_{FM} V_{PK} | Figure |
|-------------|---|---|--|--|---|--------|
| D10XB60 | 600 | 10 | 150 | 10 | 5 | 1 |
| D10XB60H | 600 | 10 | 200 | 10 | 5 | 1 |
| D15XB60 | 600 | 15 | 250 | 10 | 7.5 | 2 |
| D15XB60H | 600 | 15 | 300 | 10 | 7.5 | 2 |
| D20XB60 | 600 | 20 | 300 | 10 | 10 | 2 |
| D25XB60 | 600 | 25 | 400 | 10 | 12 | 2 |

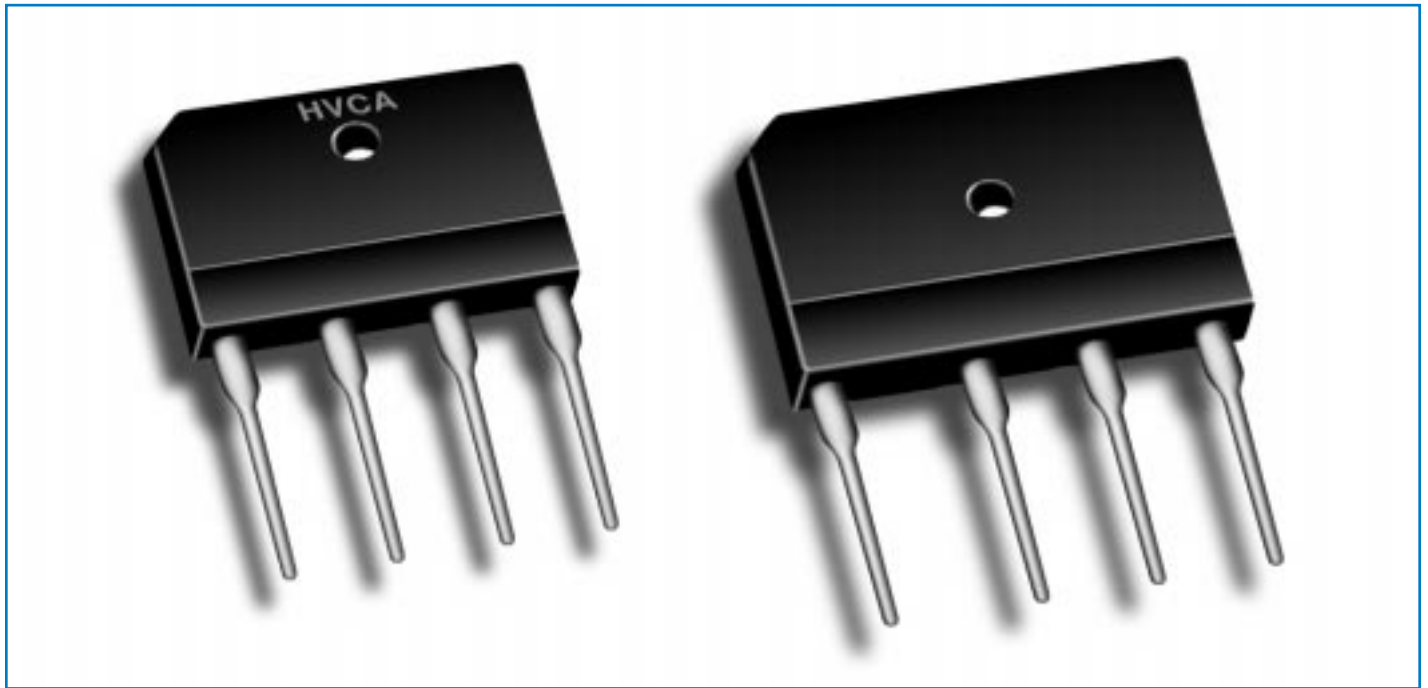