


**IN74ALS240A**

**OCTAL BUFFER / DRIVER  
WITH 3-STATE OUTPUTS**

This octal buffer/driver is designed specially to improve both the performance and density of 3-state memory address drivers, clock drivers and bus-oriented receivers and transmitters. When this device is used with the 'ALS241, 'AS241A, 'ALS244 and AS244A, the circuit designer has a choice of selected combinations of inverting and noninverting outputs, symmetrical active-low output-enable (OE) inputs and complementary OE and OE inputs. This device features high fan-out and improved fan-in.


The IN74ALS240A is characterized for operation from 0°C to 70°C.

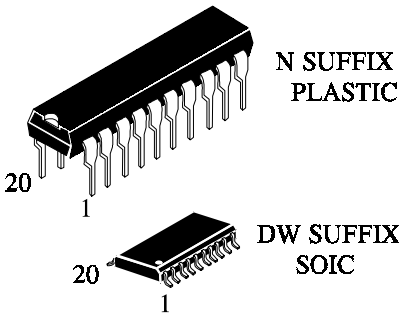


**ORDERING INFORMATION**

IN74LS240AN Plastic  
 IN74ALS240AD SOIC  
 T<sub>A</sub> = 0° to 70° C for all packages


**Logic Symbol**

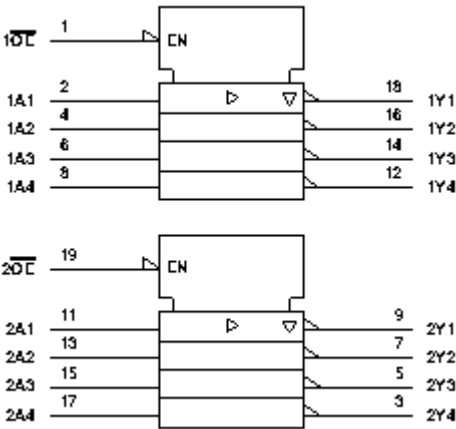

**Logic Diagram (Positive Logic)**

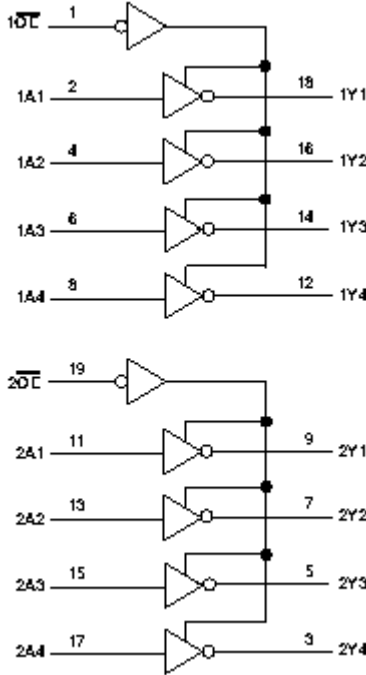

**PIN ASSIGNMENT**

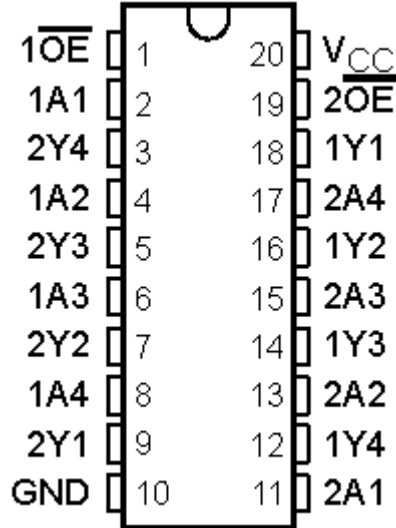

**FUNCTION TABLE**

INPUTS		OUTPUT
OE	A	Y
L	H	L
L	L	H
H	X	Z

**ABSOLUTE MAXIMUM RATINGS**

**OVER OPERATING FREE-AIR TEMPERATURE RANGE**

Supply voltage, $V_{CC}$	7 V
Input voltage, $V_I$	7 V
Voltage applied to a disabled 3-state output	5.5V
Operating free-air temperature range, $T_A$	0°C to 70°C.
Storage temperature range	-65°C to 150°C

**RECOMMENDED OPERATING CONDITIONS**

		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			V
$V_{IL}$	Low-level input voltage			0.8	V
$I_{OH}$	High-level output current			-15	mA
$I_{OL}$	Low-level output current			24	mA
$T_A$	Operating free-air temperature	0		70	°C

**ELECTRICAL CHARACTERISTICS OVER RECOMMENDED OPERATING FREE-AIR TEMPERATURE RANGE**

Parameter	Test Conditions		MIN	TYP**	MAX	UNIT
V <sub>IK</sub>	V <sub>CC</sub> = 4.5V	I <sub>I</sub> = -18mA			-1.2	V
V <sub>OH</sub>	V <sub>CC</sub> = 4.5V to 5.5V	I <sub>OH</sub> = -0.4mA	V <sub>CC</sub> -2			V
	V <sub>CC</sub> = 4.5V	I <sub>OH</sub> = -3mA	2.4	3.2		V
		I <sub>OH</sub> = -15mA	2			
V <sub>OL</sub>	V <sub>CC</sub> = 4.5V	I <sub>OL</sub> = 12 mA		0.25	0.4	V
		I <sub>OL</sub> = 24 mA		0.35	0.5	
		I <sub>OL</sub> = 48 mA*		0.35	0.5	
I <sub>OZH</sub>	V <sub>CC</sub> = 5.5V	V <sub>O</sub> = 2.7V			20	μA
I <sub>OZL</sub>	V <sub>CC</sub> = 5.5V	V <sub>O</sub> = 0.4V			-20	μA
I <sub>I</sub>	V <sub>CC</sub> = 5.5V	V <sub>I</sub> = 7V			0.1	mA
I <sub>IH</sub>	V <sub>CC</sub> = 5.5V	V <sub>I</sub> = 2.7V			20	μA
I <sub>IL</sub>	V <sub>CC</sub> = 5.5V	V <sub>I</sub> = 0.4V			-0.1	mA
I <sub>O***</sub>	V <sub>CC</sub> = 5.5V	V <sub>O</sub> = 2.25V	-30		-112	mA
I <sub>CC</sub>	V <sub>CC</sub> = 5.5V	Output high		4	11	mA
		Outputs low		13	23	
		Outputs disabled		14	25	

\*- Applies only to the -1 version and only if V<sub>CC</sub> is between 4.75V and 5.25V

\*\* - All typical values are at V<sub>CC</sub>=5V, T<sub>A</sub>=25°C

\*\*\* - The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I<sub>OS</sub>

**SWITCHING CHARACTERISTICS**

Parameter	From (input)	To (output)	V <sub>CC</sub> = 4.5 V to 5.5 V C <sub>L</sub> = 50 pF R <sub>1</sub> = 500 Ω R <sub>2</sub> = 500 Ω T <sub>A</sub> = MIN to MAX*		UNIT
			MIN	MAX	
t <sub>PLH</sub>	A	Y	2	9	ns
t <sub>PHL</sub>			2	9	
t <sub>PZH</sub>	OE	Y	5	13	ns
t <sub>PZL</sub>			5	18	
t <sub>PHZ</sub>	OE	Y	2	10	ns
t <sub>PLZ</sub>			3	12	

\*- For conditions shown as MIN and MAX, use the appropriate value specified under recommended operating conditions