

W154A4SUKPBGKW

HYPER RED

BLUE / GREEN

Features

- UNIFORM LIGHT OUTPUT.
- LOW POWER CONSUMPTION.
- I.C. COMPATIBLE.
- LONG LIFE-SOLID STATE RELIABILITY.


Description

The Hyper Red source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

The Blue source color devices are made with InGaN on SiC Light Emitting Diode.

The Green source color devices are made with InGaN on SiC Light Emitting Diode.

Package Dimensions

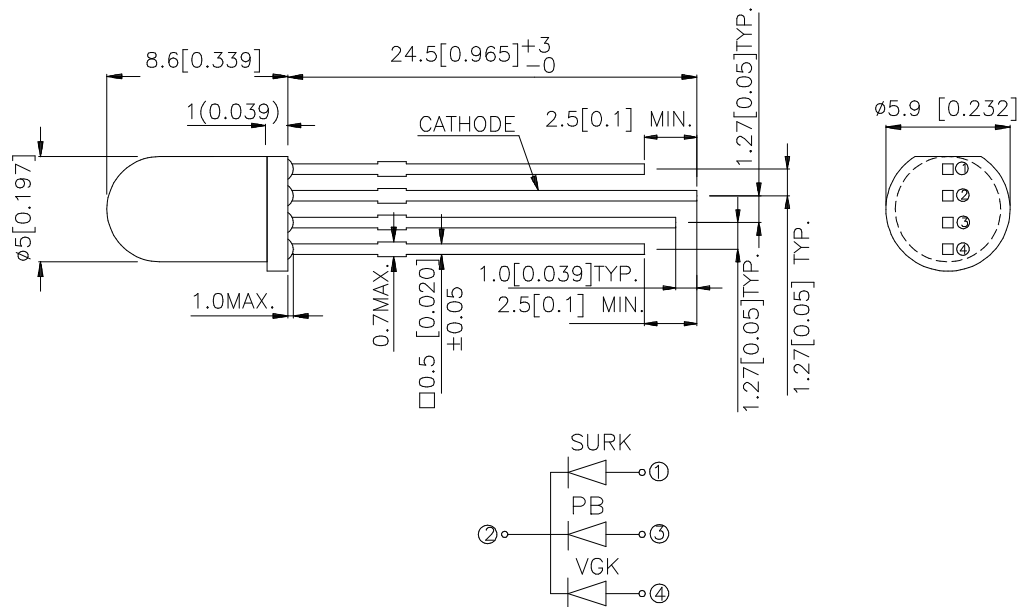

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25 (0.01)$ unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20 mA		Viewing Angle
			Min.	Typ.	2θ1/2
W154A4SUKPBVGKW	HYPHER RED (InGaAlP)	WHITE DIFFUSED	380	600	60°
	BLUE (InGaN)		110	350	
	GREEN (InGaN)		280	500	

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ _{peak}	Peak Wavelength	Hyper Red Blue Green	650 468 515		nm	I _F =20mA
λ _D	Dominate Wavelength	Hyper Red Blue Green	635 470 525		nm	I _F =20mA
Δλ _{1/2}	Spectral Line Half-width	Hyper Red Blue Green	28 25 30		nm	I _F =20mA
C	Capacitance	Hyper Red Blue Green	35 65 45		pF	V _F =0V;f=1MHz
V _F	Forward Voltage	Hyper Red Blue Green	1.95 3.65 4.2	2.5 4.2 4.8	V	I _F =20mA
I _R	Reverse Current	All		10	μA	V _R = 5V

Absolute Maximum Ratings at T_A=25°C






Parameter	Hyper Red	Blue	Green	Units
Power dissipation	170	102	105	mW
DC Forward Current	30	30	25	mA
Peak Forward Current [1]	185	160	130	mA
Reverse Voltage	5	5	5	V
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 5 Seconds			

Notes:


- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2mm below package base.

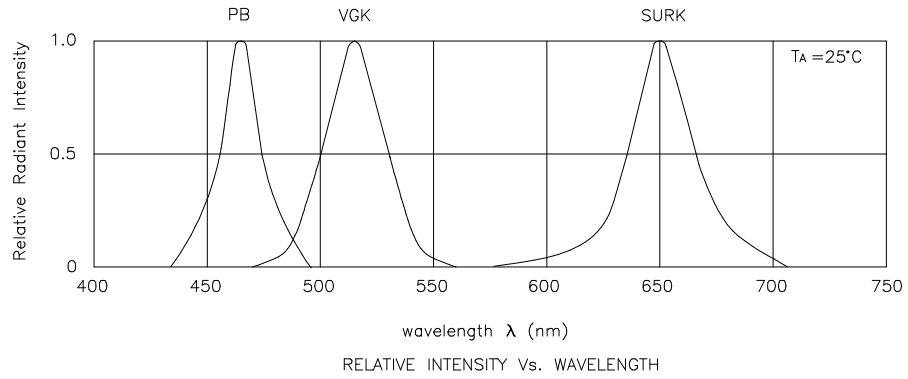


W154A4SUKPBVGKW Hyper Red

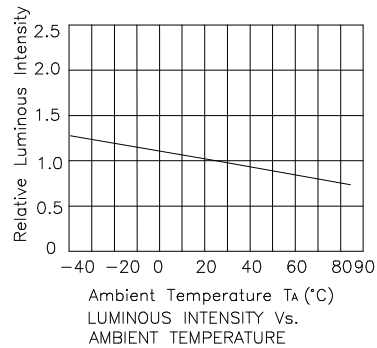


Blue




Forward Voltage(V)
FORWARD CURRENT Vs.
FORWARD VOLTAGE




If-Forward Current (mA)
LUMINOUS INTENSITY Vs.
FORWARD CURRENT



Ambient Temperature Ta (°C)
FORWARD CURRENT
DERATING CURVE

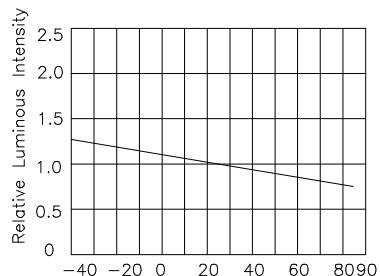


Ambient Temperature Ta (°C)
LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE




SPATIAL DISTRIBUTION


Green




Forward Voltage(V)
FORWARD CURRENT Vs.
FORWARD VOLTAGE




IF-Forward Current (mA)
LUMINOUS INTENSITY Vs.
FORWARD CURRENT



Ambient Temperature Ta (°C)
FORWARD CURRENT
DERATING CURVE

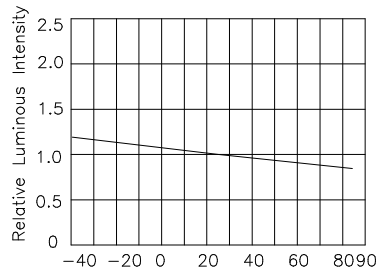

Ambient Temperature Ta (°C)
LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION