

## Features

- Highly Integrated Downconverter
- Operates over 2.8 V to 5 V Supply Voltage
- Dual-Band and Triple-Mode Operation
- High Linearity, IP3 = 10 dBm typical
- Adjustable Gain and IP3
- 4mm FQFP-N Plastic Package


## Description

M/A-COM's MADCSM0001 is a downconverter suitable for Dual-Band and Triple-Mode Operation. The MADCSM0001 has a 50-ohm matched input, consumes low DC power and incorporates an on-chip switch that determines CDMA and AMPS mode select. The designer can tailor the linearity and gain performance of the MADCSM0001 according to the system needs.

The MADCSM0001 is ideally suited for wireless applications where low noise, low current and high linearity are important features.

The MADCSM0001 is fabricated using M/A-COM's 0.5-micron low noise E/D GaAs MESFET process. The process features full passivation for increased performance and reliability.

## FQFP-N, 4mm, 20 Lead

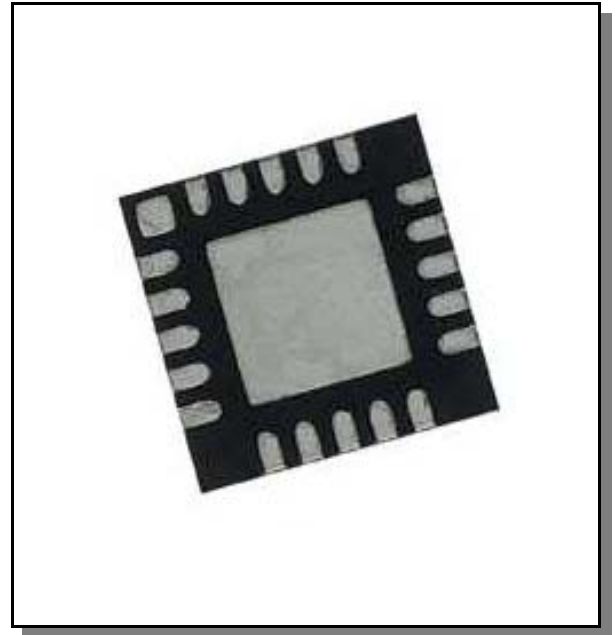

## Cellular Band - Electrical Specifications:

$T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\ \text{Ohms}$ ,  $V_{DD} = 3.0\ \text{V}$ ,  $\text{MODE\_SEL} = 0\ \text{V}/3.0\ \text{V}$

RF Frequency = 880 MHz, LO Frequency = 965 MHz, IF Frequency = 85 MHz

Parameter	Test Conditions	Units	Min	Typ	Max
LO Power	—	dBm	-10	-8	-5
Conversion Gain	LO = -8 dBm	dB	5	10	12
Noise Figure	LO = -8 dBm	dB	—	8	—
Input IP3	LO = -8 dBm	dBm	5	10	—
Return Loss	RF Port	dB	—	12	—
	LO Port	dB	—	25	—
	IF Port	dB	—	17	—
Isolation	LO to IF	dB	—	13	—
	RF to IF	dB	—	28	—
Current	LO = -8 dBm	mA	—	10	15


**PCS Band - Electrical Specifications:** $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\ \Omega$ ,  $V_{DD} = 3.0\ \text{V}$ 

RF Frequency = 1960 MHz, LO Frequency = 1750 MHz, IF Frequency = 210 MHz

Parameter	Test Conditions	Units	Min	Typ	Max
LO Power	—	dBm	-10	-8	-5
Conversion Gain	LO = -8 dBm	dB	9.5	12	14.5
Noise Figure	LO = -8 dBm	dB	—	8	—
Input IP3	LO = -8 dBm	dBm	4	10	—
Return Loss	RF Port LO Port IF Port	dB	— — —	12 15 19	— — —
Isolation	LO to IF RF to IF	dB dB	— —	39 59	— —
Current	LO = -8 dBm	mA	—	13	17

**Pin Configuration**

Pin No.	Function	Description
1	CELL MIX	Cellular Mixer RF Input/ Mixer IF Output
2	GND	DC and RF Ground
3	PCS IFA IN	PCS IFA Input
4	GND	DC and RF Ground
5	PCS MIX	PCS Mixer RF Input/ Mixer IF Output
6	PCS LO IN	PCS LO Buffer Input (-10 to -5 dBm)
7	GND	DC and RF Ground
8	PCS VDD	PCS Downconverter Supply Voltage. Must be RF bypassed
9	GND	DC and RF Ground
10	CELL LO IN	Cellular LO Buffer Input (-10 to -5 dBm)
11	PCS SRC	Parallel RC network determines the PCS IFA Current, Gain and IIP3.
12	PCS IF OUT	PCS IF Out. VDD and IF matching required.
13	GND	DC and RF Ground
14	CELL IF OUT2	Cellular IF Out2. VDD and IF matching required.
15	CELL IF OUT1	Cellular IF Out1. VDD and IF matching required.
16	MODE SEL	Selects between Cellular IF Out1 and IF Out2
17	MODE SEL VDD	Mode Select Network Supply Voltage
18	CELL SRC	Parallel RC network determines the Cellular IFA Current, Gain and IIP3.
19	CELL VDD	Cellular Downconverter Supply Voltage. Must be RF bypassed.
20	CELL IFA IN	Cellular IFA Input

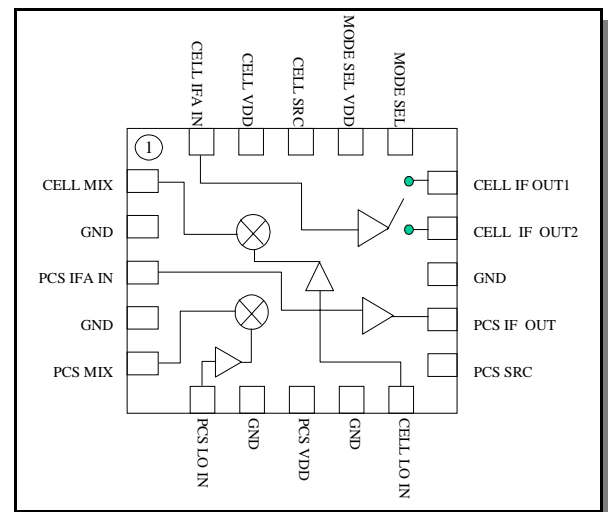**Functional Block Diagram****Absolute Maximum Ratings**<sup>1</sup>


Parameter	Absolute Maximum
Voltage	6 V
Input Power	0 dBm
Operating Temperature	-30°C to +85°C
Storage Temperature	-65°C to +150°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

## Sample Board Schematic

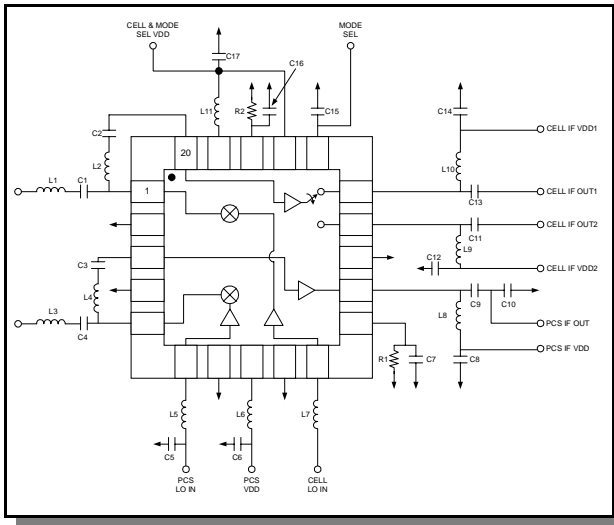

## Recommended PCB Configuration

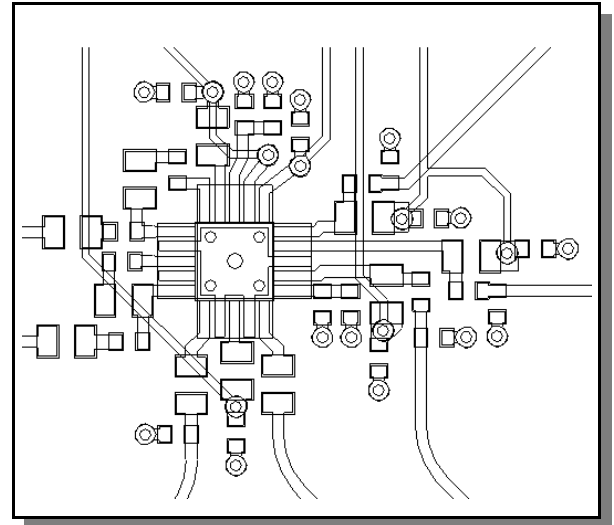

## External Circuitry Parts List

Ref Designation	Value	Purpose
C1	2.7 pF	RF Matching
C2,C3	1000 pF	RF/IF Bypass
C4	1 pF	RF Matching
C5	2 pF	RF Matching
C6,C7,C8,C12,C14, C15,C16,C17	0.1 $\mu$ F	RF/IF Bypass
C9	39 pF	IF Matching
C10	12 pF	IF Matching
C11,C13	33 pF	IF Matching
L1,L11	22 nH	RF Matching
L2	270 nH	IF Matching
L3	6.8 nH	RF Matching
L4	120 nH	IF Matching
L5,L6	5.1 nH	RF/IF Matching
L7	15 nH	RF Matching
L8	33 nH	IF Choke
L9,L10	150 nH	IF Choke
R1	56 Ohms	PCS Source Bias
R2	51 Ohms	Cellular Source Bias


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Typical Performance Curves vs. Temperature - Cellular Frequency Band,  
 LO = -8 dBm, V<sub>DD</sub> = 3.0 V


Conversion Gain (IF1)

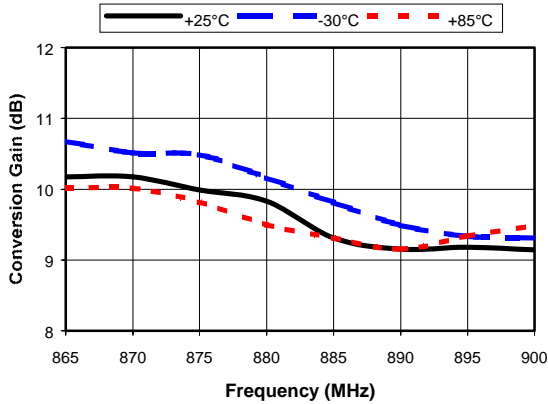


Conversion Gain (IF2)

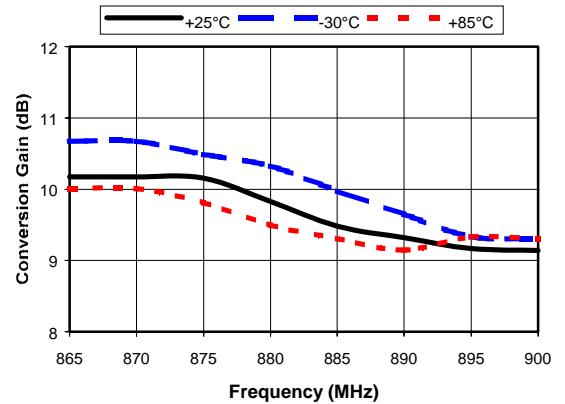


Input IP3 (IF1)

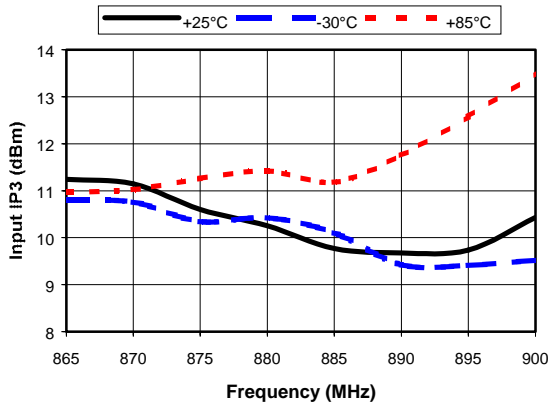


Input IP3 (IF2)

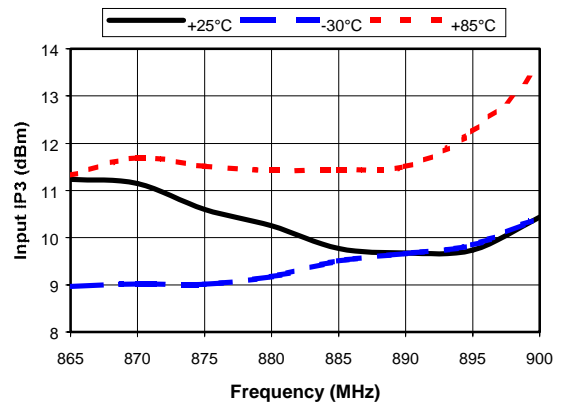

Noise Figure (IF1)

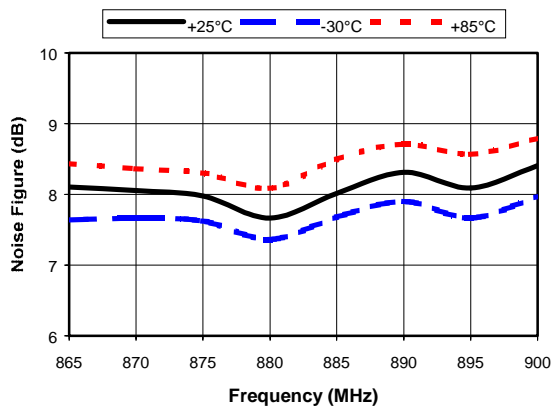

Noise Figure (IF2)

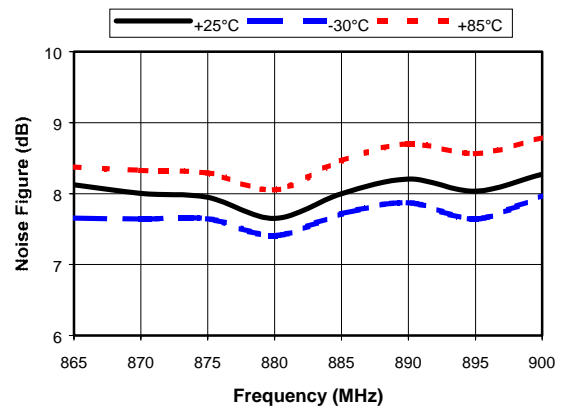


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel.+44 (1344) 869 595, Fax+44 (1344) 300 020

Typical Performance Curves vs. Temperature - Cellular Frequency Band, LO = -8 dBm, V<sub>DD</sub>= 3.0 V


LO to IF1 Isolation

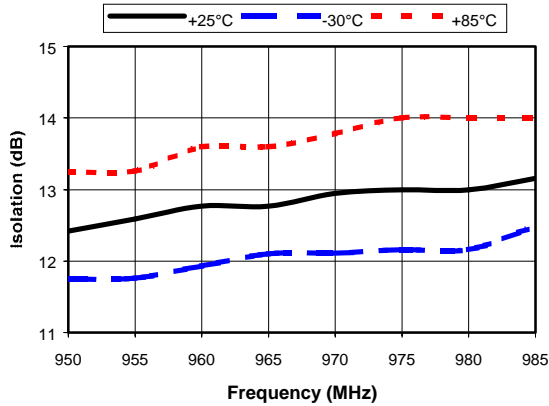


LO to IF2 Isolation

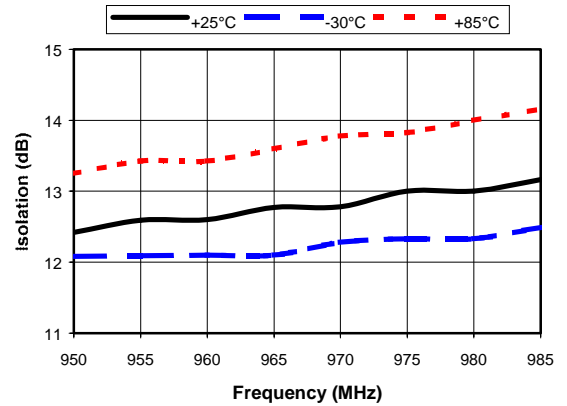


RF to IF1 Isolation

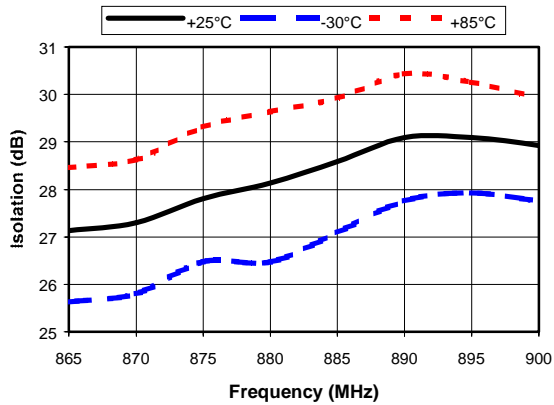


RF to IF2 Isolation

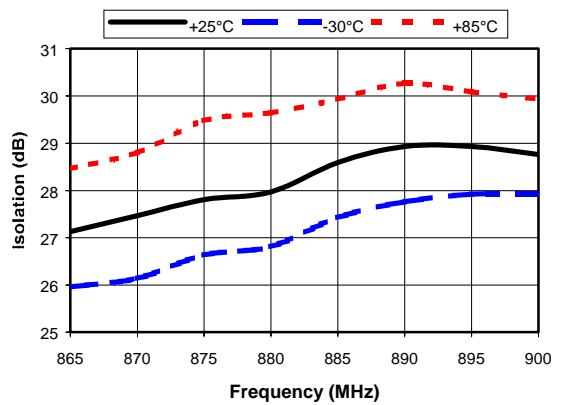

Current (IF1)

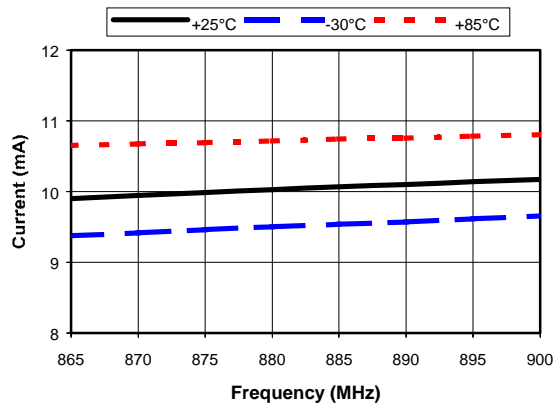

Current (IF2)

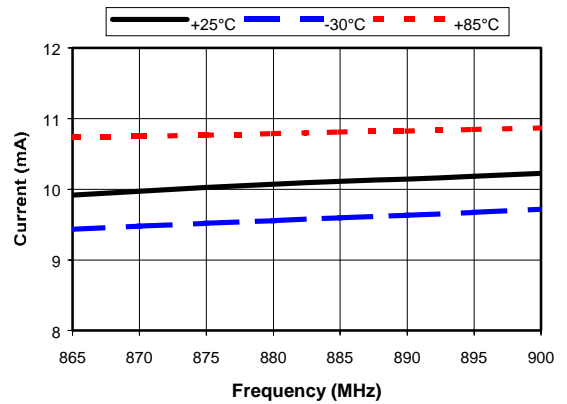


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel.+44 (1344) 869 595, Fax+44 (1344) 300 020

Typical Performance Curves vs. Temperature - Cellular Frequency Band,  
 LO = -8 dBm,  $V_{DD}$  = 3.0 V


LO Port Match

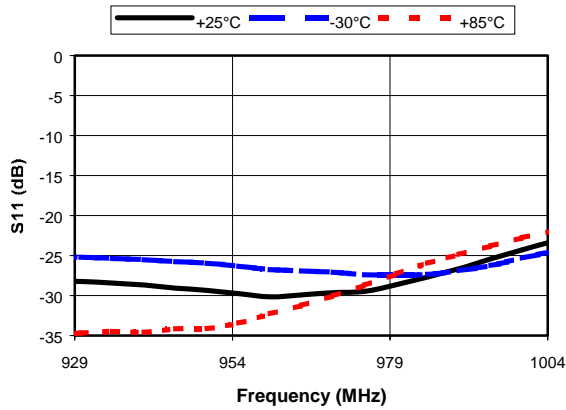


RF Port Match

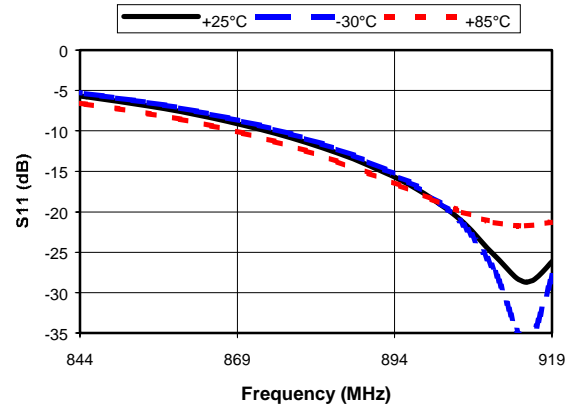

IF1 Port Match

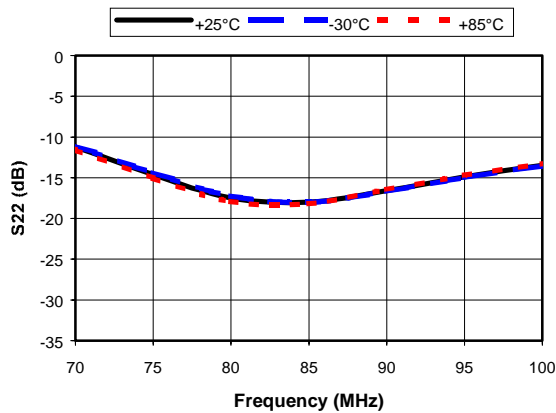

IF2 Port Match

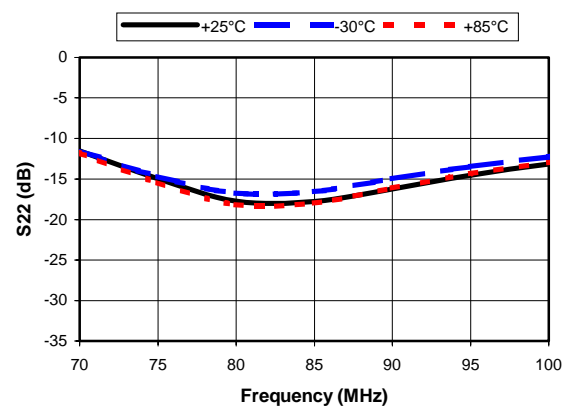


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Typical Performance Curves vs. Temperature - PCS Frequency Band, LO = -8 dBm, V<sub>DD</sub> = 3.0 V


Conversion Gain

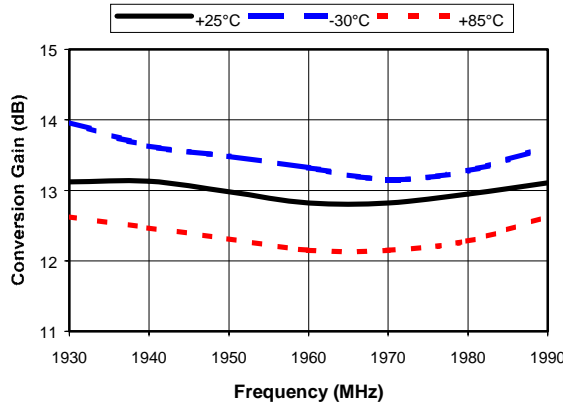


Input IP3

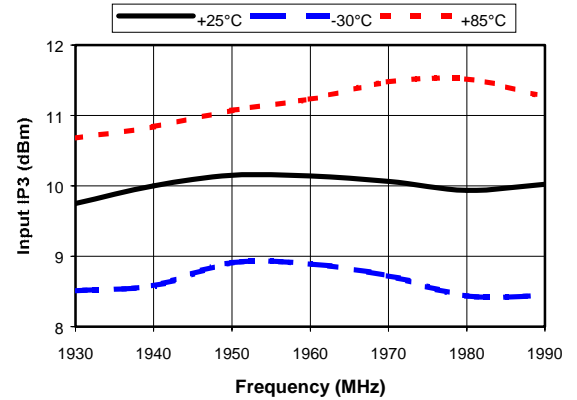


Noise Figure

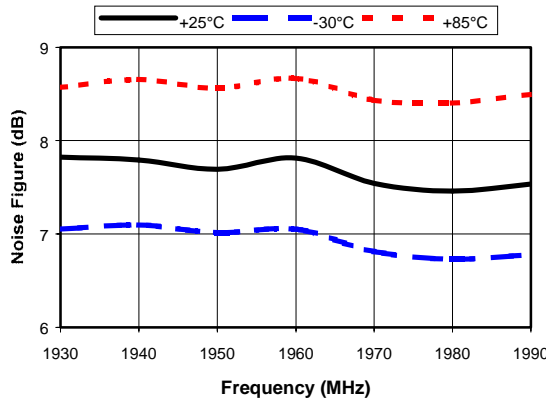


LO to IF Isolation

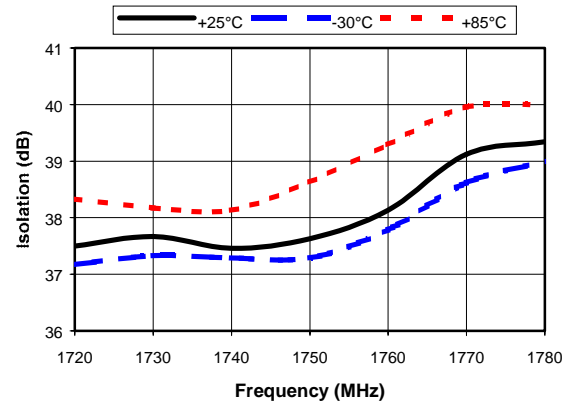

RF to IF Isolation

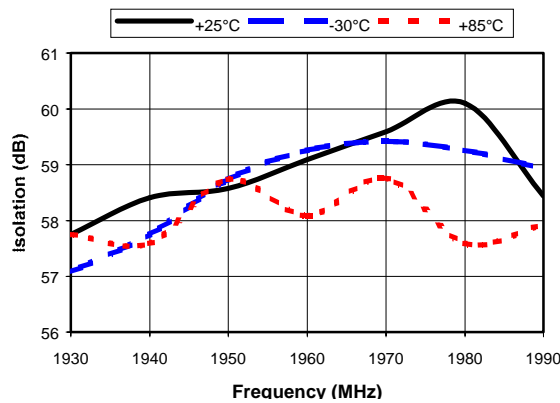

Current

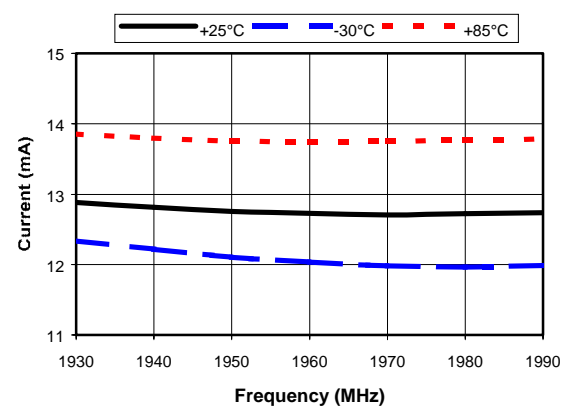


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Typical Performance Curves vs. Temperature - PCS Frequency Band, LO = -8 dBm, V<sub>DD</sub> = 3.0 V


LO Port Match

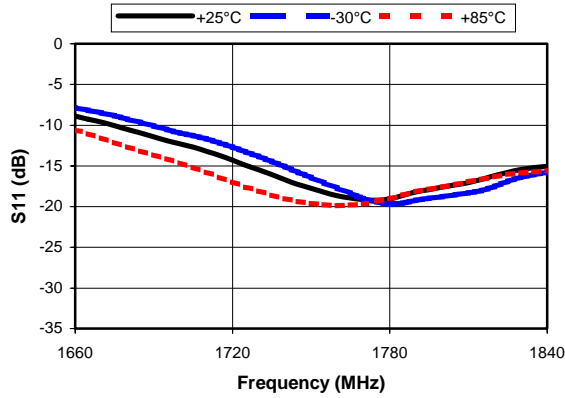


RF Port Match

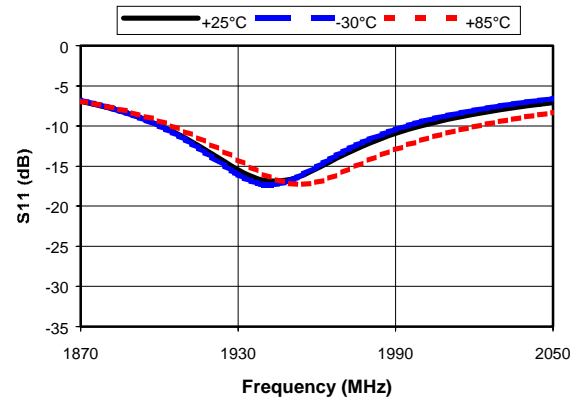

IF Port Match

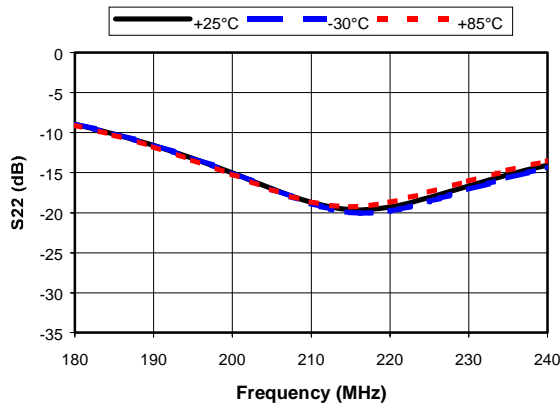

FQFP-N, 4mm, 20 Lead

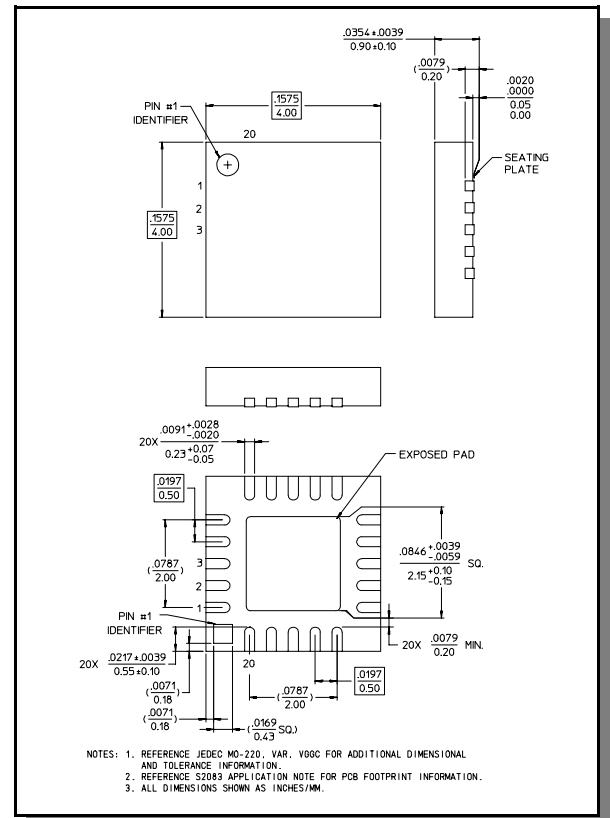

Ordering Information

Part Number	Package
MADCSM0001	Bulk Packaging
MADCSM0001TR*	Tape and Reel (1K Reel)
MADCSM0001SMB	Sample Board

\* Reference Application Note M513 for reel size information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.



- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020