

# Surface Mount Directional Coupler

## JDC-20-1W+ JDC-20-1W

50Ω 50 to 750 MHz




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

### Outline Drawing

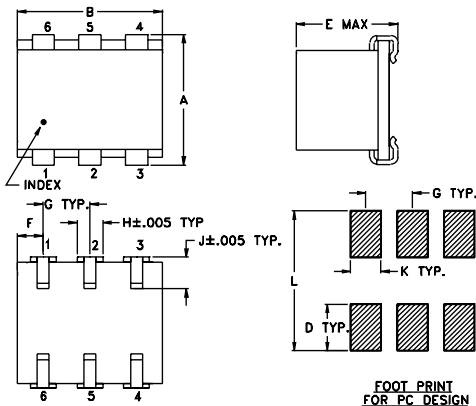


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

### Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

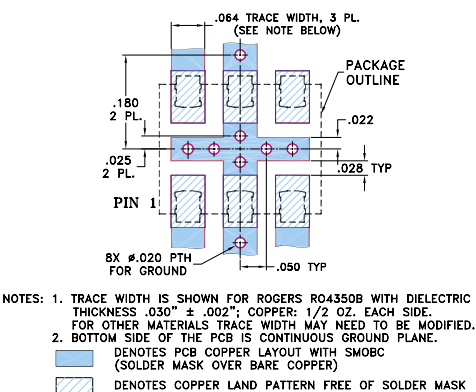

### Features

- wideband, 50 to 750 MHz
- low insertion loss, 0.5 dB typ.
- excellent solderability

### Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

CASE STYLE: BH292  
PRICE: \$ 14.95 ea. QTY (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		L Max.	MU Max.
f <sub>L</sub> -f <sub>U</sub>									
50-750	19.5±0.5	±0.5	0.5	0.9	22	15	1.2	0.5	0.5

1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
50.00	0.33	19.77	21.32	30.32	32.06	25.34
150.00	0.33	19.87	21.83	34.90	38.90	29.25
250.00	0.35	19.87	22.89	36.40	41.45	30.37
330.00	0.35	19.87	24.06	36.11	40.25	30.40
385.00	0.40	19.87	25.12	35.07	38.62	29.96
435.00	0.42	19.82	26.45	33.87	37.00	29.35
480.00	0.46	19.83	27.52	32.62	35.61	28.65
525.00	0.44	19.76	28.59	31.36	34.22	27.88
650.00	0.50	19.68	28.53	27.83	30.53	25.66
750.00	0.55	19.59	25.15	25.26	27.85	24.06

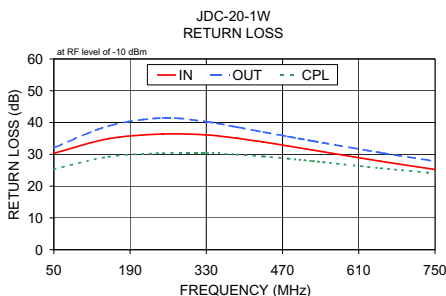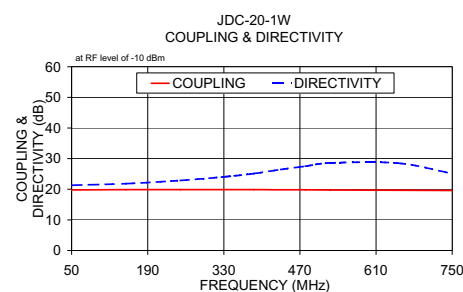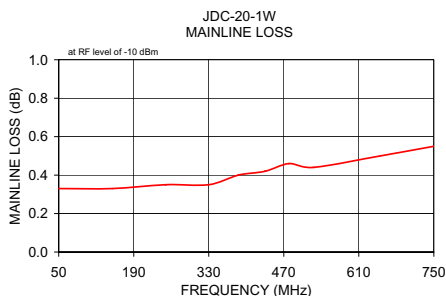

### electrical schematic

