

Surface Mount Directional Coupler

JDC-6-1+ JDC-6-1

50Ω 5 to 400 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

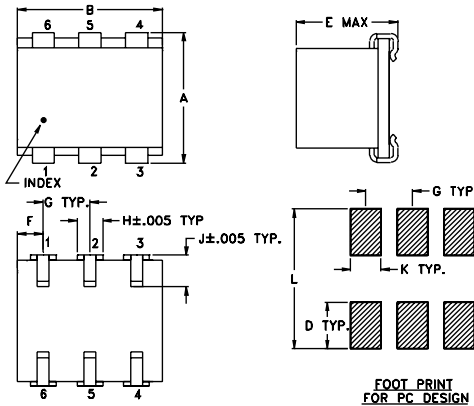


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

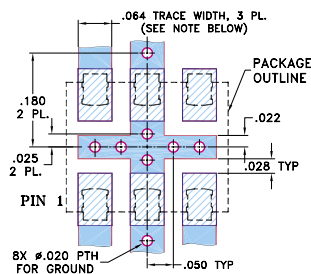

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 5 to 400 MHz
- low insertion loss, 1.7 dB typ.
- high directivity, 25 dB typ.
- good VSWR, 1.25 typ.
- excellent solderability

Applications

- communications
- VHF/UHF

CASE STYLE: BH292
PRICE: \$ 14.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W		
	Nom.	Flatness	L		M		U		L		M		U			Typ.	Max.	Max.
5-400	6.5±0.5	±0.5	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.	
			1.6	2.0	1.7	2.4	2.0	2.4	35	30	25	20	20	15	1.25	0.5	0.5	

L = 5-40 MHz M = 40-200 MHz U = 200-400 MHz

1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	1.58	6.15	38.87	15.68	16.95	17.56
23.00	1.62	6.15	37.15	15.87	16.85	17.48
41.00	1.67	6.14	34.77	15.99	16.83	17.50
62.00	1.66	6.20	32.17	16.15	16.81	17.52
92.00	1.66	6.22	29.29	16.44	16.80	17.58
152.00	1.72	6.27	25.25	17.21	16.85	17.82
210.00	1.84	6.24	22.81	18.27	16.96	18.17
265.00	1.86	6.29	21.09	19.62	17.11	18.64
340.00	1.98	6.42	19.22	22.31	17.25	19.47
400.00	2.09	6.41	18.19	25.59	17.25	20.20

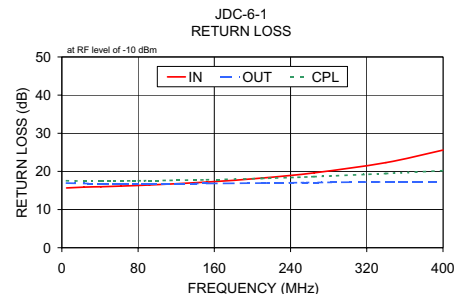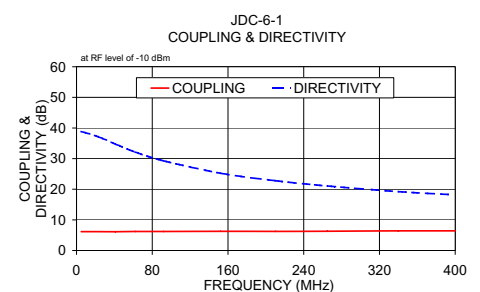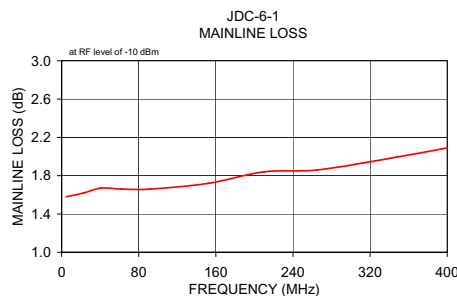

electrical schematic

