


M2035, M2036, and M2037 Series 5.0 x 7.0 x 1.4 mm HCMOS Compatible Surface Mount Oscillators



- ± 20 ppm stability
- Standby function
- Ideal for WLAN and IEEE802.11 Applications

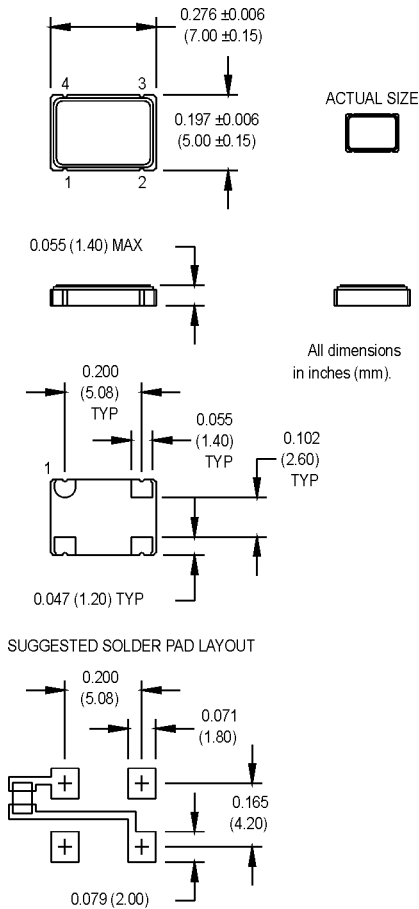

Pin Connections

PIN	FUNCTION
1	Standby
2	Ground
3	Output
4	+Vdd

Ordering Information

	M203X	D	8	Q	C	N	00.0000 MHz
Product Series							
M2035 = 2.85V							
M2036 = 3.0V							
M2037 = 3.3V							
Temperature Range							
D: -10°C to +70°C							
6: -20°C to +70°C							
2: -40°C to +85°C							
Stability							
3: ± 100 ppm	4: ± 50 ppm						
6: ± 25 ppm	8: ± 20 ppm **						
Output Type							
Q: Standby Function							
Symmetry/Logic Compatibility							
C: 45/55 CMOS							
Package/Lead Configurations							
N: Leadless							
Frequency (customer specified)							

** -10° to +70° only

	PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition	
Electrical Specifications	Frequency Range	F	1.5		125	MHz	See Note 1	
	Frequency Stability	$\Delta F/F$			± 20	ppm	See Note 2	
	Operating Temperature	T _A	-10		+70	°C		
	Input Voltage	V _{dd}		3.15	3.3	3.45	V	3.3V
				2.85	3.0	3.15	V	3.0V
				2.7	2.85	3.0	V	2.85V
	Input Current	I _{dd}	1.500 to 20.000 MHz			15	mA	3.3V
			20.001 to 50.000 MHz			20	mA	
			50.001 to 67.000 MHz			30	mA	
			67.001 to 125.000 MHz			55	mA	
	Symmetry (Duty Cycle)		45		55	%	½ V _{dd}	
	Rise/Fall Time	Tr/Tf	80.000 MHz			4	ns	See Note 2
			22.000 to 44.000 MHz			6	ns	10% to 90% V _{dd} 10% to 90% V _{dd}
	Logic "1" Level	V _{oh}	90% V _{dd}				V	
	Logic "0" Level	V _{ol}				10% V _{dd}	V	
	Output Current	I _{oh}	-2				mA	
			+2				mA	
	Output Load					15	pF	
	Start-up Time					5	ms	
Standby Current					10	µA		
Standby Function		Pin 1 high or floating: clock signal output Pin 1 low: output disables to high impedance						
Output Disable Time					150	ns		
Output Enable Time					5	ms		
Environmental	Mechanical Shock	Per MIL-STD-202, Method 213, Condition C						
	Vibration	Per MIL-STD-202, Method 201 & 204						
	Reflow Solder Conditions	240°C for 10 s max.						
	Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm.cc/s of helium)						
	Solderability	Per EIAJ-STD-002						

1. Consult factory for available frequencies in this range.
2. Inclusive of calibration, deviation over temperature, supply voltage change, load change, shock, vibration, and 10 years aging.

M-tron reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of such product.

M-tron Industries, Inc., PO Box 630, Yankton, SD 57078-0630, USA Phone: 605-665-9321 or 1-800-762-8800 Fax: 605-665-1709 Website: www.mtron.com
M-tron Industries Limited, 1104 Shanghai Industrial Investment Building, 48-62 Hennessy Road, Wanchai, Hong Kong, China Phone: 852-2866-8023 Fax: 852-2529-1822

Revised 8/14/03