

Common Mode Choke for Telecom Applications


EPZ3022G

- Designed for 4-Wire Links, such as ISDN-S/T and T1/E1/CEPT
- High Frequency Chokes for EMI Reduction
- Operating Temperature : 0°C to +70°C


Electrical Parameters @ 25° C

OCL (μ H Min.) +25°C	Interwinding Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	Hipot (Vrms)	DCR (Ω Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms		
33	20	0.3	500	0.2


Schematic



Typical Common Mode Attenuation

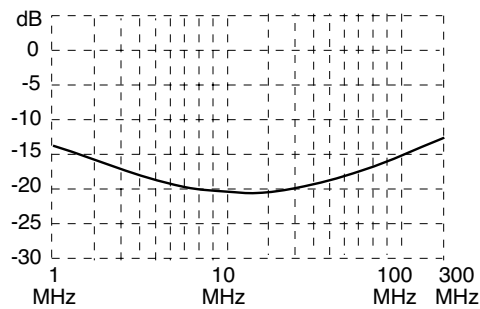

Package

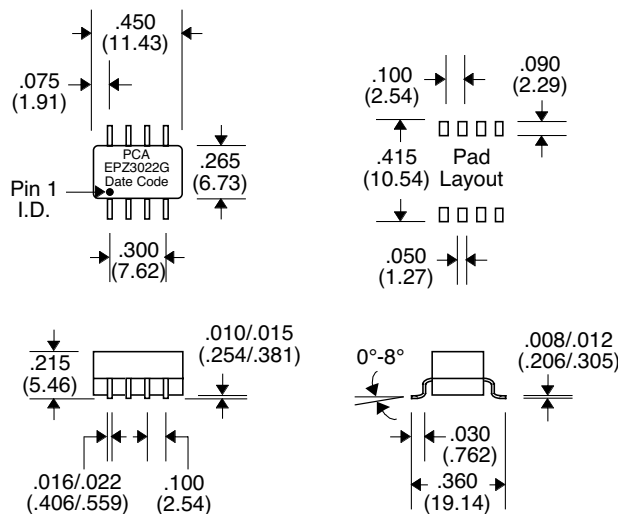

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$