


FEATURES




- LOW COST
- BUILT IN CAPACITORS

SPECIFICATIONS

FREQUENCY	2.00 MHz	4.00 MHz	6.00 MHz	20.00 MHz
DIMENSIONS	FIGURE 1	FIGURE 2	FIGURE 3	FIGURE 2
FREQUENCY TOLERANCE	±0.5% MAX		±0.3% MAX	
RESONANT IMPEDANCE	30 OHMS MAX			
FREQUENCY STABILITY OVER TEMPERATURE	±0.3% MAX (-20°C TO +80°C)			
OPERATING TEMPERATURE RANGE	-20°C TO +80°C			
ISOLATION RESISTANCE	100 M OHM MIN			
FREQUENCY AGING (10 YEARS)	±0.3% MAX			
WITHSTANDING VOLTAGE	100 VDC, 5 sec. MAX			
BUILT-IN CAPACITANCE	30 pF ±20% MAX			
MAX VOLTAGE	6 VDC, 15Vp-p AC			
STORAGE TEMPERATURE RANGE	-35°C TO +85°C			

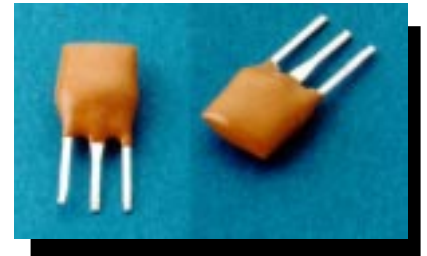

OUTLINE DRAWINGS

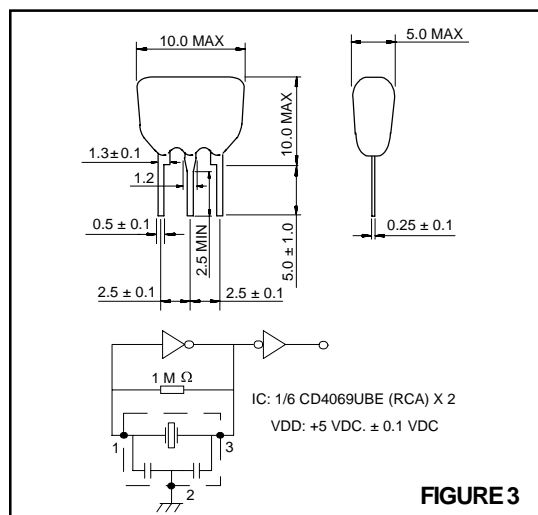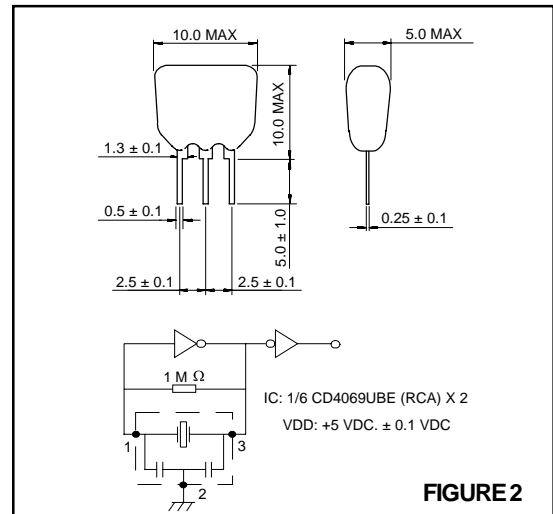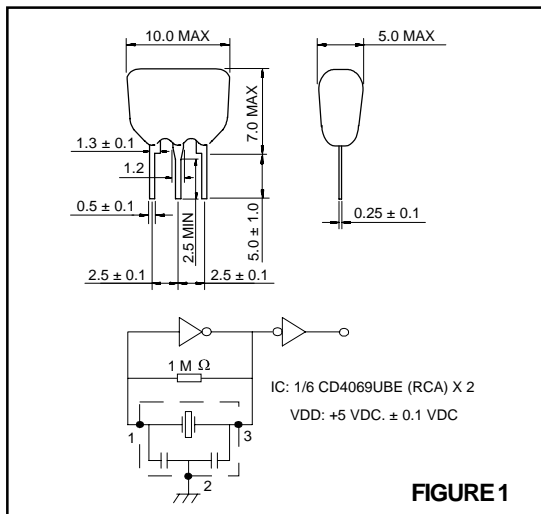

PART NUMBERING SYSTEM

SERIES	-	FREQUENCY
POC		IN MHz