

# BEI GYROCHIP™

## Model QRS11

Micromachined Angular Rate Sensor



### Applications

- **Stabilization**
  - Satellite Communication Antennas
  - Optical Line-of-Sight Systems
  - Missile Seekers
- **Controls**
  - Aircraft & Missile Flight Control
  - Attitude Control
  - Yaw Dampers
- **Guidance**
  - Missile Mid-Course Guidance
  - Inertial/GPS Navigation Systems
- **Instrumentation**
  - Rocket Boosters
  - Simulation & Training Aids

### Description

The BEI GyroChip™ Model QRS11 is a “MEMS” technology, solid-state “gyro on a chip.” This DC input/high-level DC output device is fully self contained, extremely small and lightweight. No external support electronics are required. Since the inertial sensing element is comprised of just one micromachined piece of crystalline quartz (no moving parts), it has a virtually “unlimited” life. The Model QRS11 is a mature product in high volume production. It is fully qualified and used on numerous advanced aircraft, missile, and space systems.

### Features

- High-Performance Inertial Sensor
- Compact, Rugged Package
- Long Operating Life
- Over 100,000 Hours MTBF
- Internal Electronics
- DC Input/High Level DC Output
- Wide Bandwidth
- Fast Start-Up

### Operation

The BEI GyroChip™ Model QRS11 utilizes a one piece, micromachined, vibrating quartz tuning fork sensing element. Applying the Coriolis effect, a rotational motion about the sensor’s input axis produces a DC voltage output proportional to the rate of rotation. Use of piezoelectric quartz material simplifies the active element resulting in exceptional stability over temperature and product life.




**BEI** SYSTRON DONNER INERTIAL DIVISION  
BEI TECHNOLOGIES, INC.

For applications assistance or more information on any of  
Systron Donner Inertial Division’s micromachined inertial sensors,  
Call 1-800-227-1625.

# BEI GYROCHIP™

## Model QRS11

### Micromachined Angular Rate Sensor

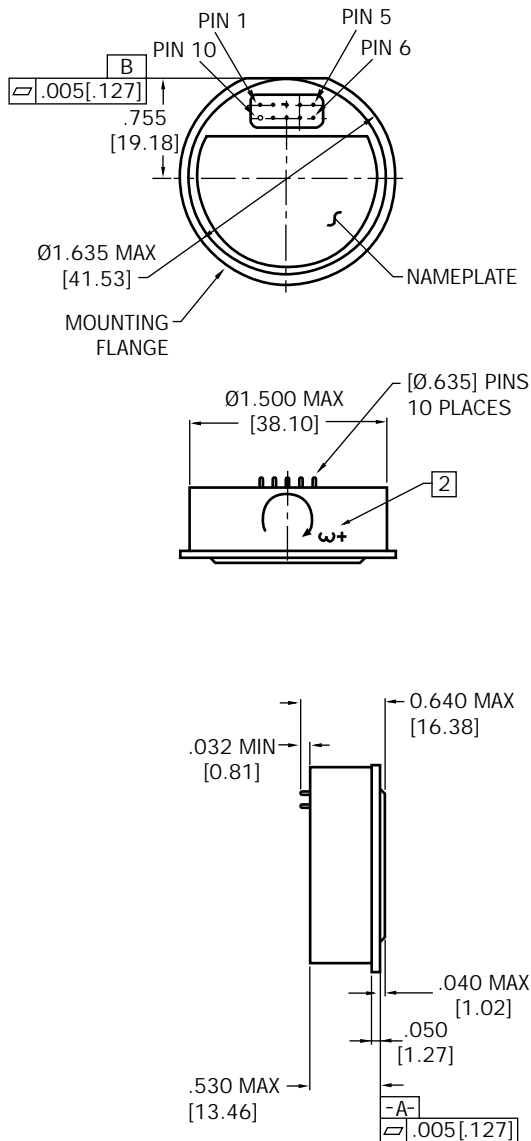

#### NOTES:

1. QRS11 IS SUPPLIED WITH TWO MOUNTING RINGS, MOUNTING SCREWS & MATING TEST CONNECTOR.
2. ANGULAR RATE APPLIED AS SHOWN WILL PRODUCE A POSITIVE OUTPUT (NOT MARKED ON UNIT).
3. UNIT OF MEASURE IS IN INCHES/[MM].
4. A DC VOLTAGE INPUT ( $\pm 1.0$  Vdc MAX.) APPLIED TO THE SELF-TEST WILL RESULT IN A CORRESPONDING PROPORTIONAL DC OUTPUT VOLTAGE.
5. TTL COMPATIBLE BIT OUTPUT SIGNAL OF  $\geq 2.4$  Vdc (REFERENCED TO POWER GROUND) INDICATING A PROPERLY FUNCTIONING UNIT.

QRS11-XXXX-XXX	
Solder Pin	Assignment
1	No Connection, Leave Open
2	Self Test Input <sup>4</sup>
3	+Vdc Input
4	Power Ground
5	BIT Output <sup>5</sup>
6	No Connection, Leave Open
7	Rate Output
8	Signal Ground
9	-Vdc Input
10	Case Ground

#### PARAMETER

PARAMETER	SUMMARY SPECIFICATIONS	
	QRS11-0XXXX-100**	QRS11-0XXXX-101**
<b>Part Number</b>	QRS11-0XXXX-100**	QRS11-0XXXX-101**
Performance Level	Standard	High
<b>Power Requirements</b>		
Input Voltage	+ and - 5 Vdc $\pm 5\%$ regulation	
Input Current	$\leq 80$ mA (each supply)	
Input Power Noise Limits	$< 10$ mV <sub>rms</sub> wideband, except at $8.7 \pm 0.5$ KHz, $< 1$ mV <sub>rms</sub>	
<b>Performance</b>		
Standard Ranges	$\pm 50, 100, 200, 500, 1000^\circ/\text{sec}$	
Full Range Output (Nominal)	$\pm 2.5$ Vdc	
Scale Factor Calibration (at 22°C)	$\leq 1\%$ of value	
Scale Factor over Temperature (Dev. from 22°C)	$\leq 0.03\%/^\circ\text{C}$	
Bias Calibration (at 22°C)	$\leq 2.0^\circ/\text{sec}^*$	$\leq 0.5^\circ/\text{sec}^*$
Bias Variation over Temperature (Dev. from 22°C)	$\leq 1.80^\circ/\text{sec}^*$	$\leq 0.35^\circ/\text{sec}^*$
Short Term Bias Stability (100 sec at const. temp)	$\leq 0.002^\circ/\text{sec}^*$	
Long Term Bias Stability (1 year)	$\leq 0.2^\circ/\text{sec}$	
G Sensitivity	$\leq 0.02^\circ/\text{sec/g}$	
Start-Up Time	$< 1$ sec	
Bandwidth ( $-90^\circ$ )	$> 60$ Hz	
Non-Linearity	$\leq 0.05\%$ of F.R.	
Threshold/Resolution	$\leq 0.004^\circ/\text{sec}^*$	
Output Noise (DC to 100Hz)	$\leq 0.010^\circ/\text{sec}/\sqrt{\text{Hz}}^*$	
Operating Life	10 years, typical	

#### Environments

Operating Temperature	-40°C to +80°C
Storage Temperature	-55°C to +100°C
Vibration Operating	8 g <sub>rms</sub> 20 Hz to 2 kHz random (Consult factory for other vibration level requirements)
Vibration Survival	20 g <sub>rms</sub> 20 Hz to 2 kHz random, 5 minutes/axis
Shock	200 g, any axis
Weight	$\leq 60$ grams

#### AVAILABLE OPTIONS

- Special Ranges
- Low Noise
- Extended Temperature Range
- Extended Bandwidth
- Flying Leads

\*Values indicated for  $\pm 100^\circ/\text{sec}$  range. \*\*"XXXX" designates  $\pm$  range.

**BEI** SYSTRON DONNER INERTIAL DIVISION  
BEI TECHNOLOGIES, INC.

#### DIVISION HEADQUARTERS

Systron Donner Inertial Division  
2700 Systron Drive, Concord, CA 94518-1399  
Tel: 1-925-671-6400 or 1-800-227-1625  
Fax: 1-925-671-6590  
E-mail: [service@systron.com](mailto:service@systron.com)  
World Wide Web: <http://www.systron.com>

#### EUROPEAN HEADQUARTERS

Systron Donner Inertial Division  
Evegate Business Centre, Evegate Park Barn  
Smeeth Ashford, Kent, England TN25 6SX  
Tel: ++44 (0) 1303 812778  
Fax: ++44 (0) 1303 812708  
E-mail: [systron@easynet.co.uk](mailto:systron@easynet.co.uk)

A subsidiary of BEI TECHNOLOGIES, INC.  
©1998 BEI Systron Donner Inertial Division. GyroChip is a registered trademark of BEI Sensors & Systems Company. All rights reserved. Printed in U.S.A.