

Unit in mm


### Telecommunication

### Data Acquisition

### Measurement Instrumentation

The Toshiba TLP595G consists of an aluminum gallium arsenide infrared emitting diode optically coupled to a photo-MOSFET in a six lead plastic DIP package. The TLP595G is a bi-directional switch which can replace mechanical relays in many applications.

- Peak Off-State Voltage : 400V (Min.)
- On-State Current : 150mA (Max.) (A Connection)
- On-State Resistance : 12Ω (Max.) (A Connection)
- Isolation Voltage : 2500Vrms (Min.)
- UL Recognized : UL1577, File No. E67349
- Trigger LED Current (Ta = 25°C)

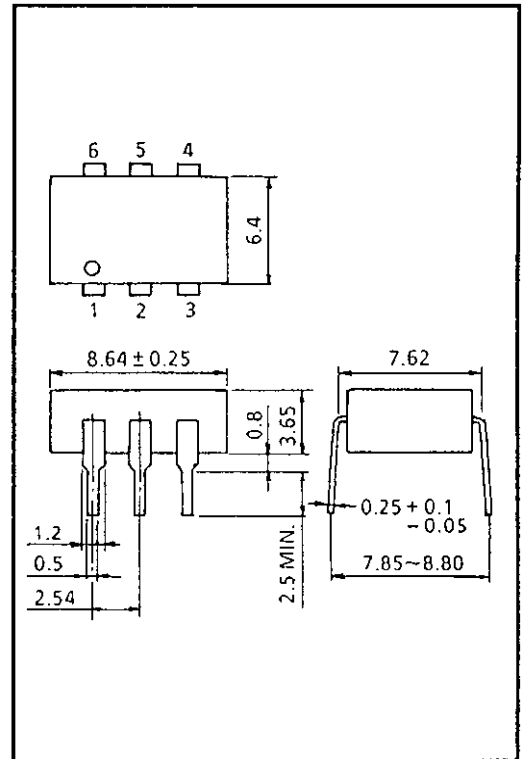


Supplementary Information	Page (s)
Lead Form Options	31-32
Tape and Reel	39-40


JEDEC	—
EIAJ	—
TOSHIBA	11-9A1

Weight : 0.49g

### Pin Configuration (Top View)

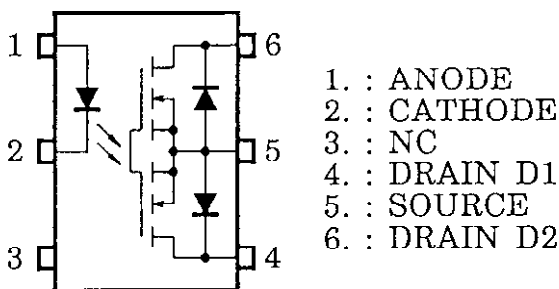

### Schematic

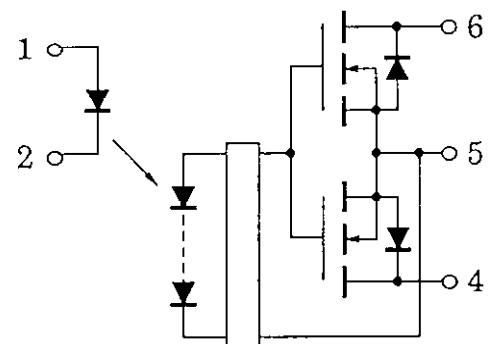

The information contained here is subject to change without notice.

The information contained herein is presented only as guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. These TOSHIBA products are intended for usage in general electronic equipments (office equipment, communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these TOSHIBA products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, spaceship, traffic signal, combustion control, all types of safety devices, etc.). TOSHIBA cannot accept liability to any damage which may occur in case these TOSHIBA products were used in the mentioned equipments without prior consultation with TOSHIBA.

CLASSIFICATION (Note 1)	TRIGGER LED CURRENT (mA)		MARKING OF CLASSIFICATION
	@ $I_{ON} = 150\text{mA}$		
	MIN.	MAX.	
(IFT2)	–	2	T2
Standard	–	5	T2, Blank

Note 1: Application type name for certification test, please use standard product type name, i.e., TLP595G (IFT2): TLP595G

**Maximum Ratings (Ta = 25°C)**


CHARACTERISTIC		SYMBOL	RATING	UNIT	
LED	Forward Current	$I_F$	30	mA	
	Forward Current Derating (Ta ≥ 25°C)	$\Delta I_F / ^\circ\text{C}$	-0.3	mA/°C	
	Peak Forward Current (100µs pulse, 100pps)	$I_{FP}$	1	A	
	Reverse Voltage	$V_R$	5	V	
	Junction Temperature	$T_j$	125	°C	
DETECTOR	Off-State Output Terminal Voltage	$V_{OFF}$	400	V	
	On-State RMS Current	A Connection	150	mA	
		B Connection	200		
		C Connection	300		
	On-State Current Derating (Ta ≥ 25°C)	A Connection	$\Delta I_{ON} / ^\circ\text{C}$	-1.5	mA/°C
		B Connection	-2.0		
		C Connection	-3.0		
Junction Temperature	$t_j$	125	°C		
Storage Temperature Range		$T_{stg}$	-55~100	°C	
Operating Temperature Range		$T_{opr}$	-20~85	°C	
Lead Soldering Temperature (10s)		$T_{sol}$	260	°C	
Isolation Voltage (AC, 1 min., R.H. ≤ 60%) (Note 2)		$BV_S$	2500	$V_{rms}$	

Note 1: Device considered a two terminal device: pins 1, 2 and 3 shorted together, and pins 4, 5 and 8 shorted together.

**Recommended Operating Conditions**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MX.	UNIT
Supply Voltage	$V_D$	–	–	320	V
Forward Current	$I_F$	10	15	20	mA
On-State Current	$I_{ON}$	–	–	150	mA
Operating Temperature	$T_{opr}$	-20	–	80	°C

**Circuit Connections**

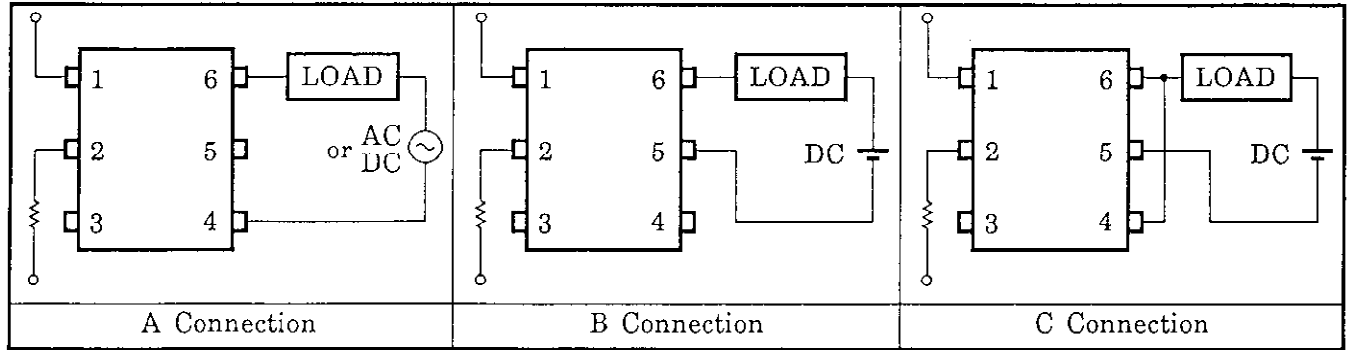

**Individual Electrical Characteristics (Ta = -25°C)**

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.*	MX.	UNIT
LED	Forward Voltage	$V_F$	$I_F = 10\text{mA}$	1.2	1.4	1.7	V
	Reverse Current	$I_R$	$V_R = 3\text{V}$	–	–	10	$\mu\text{A}$
	Capacitance	$C_T$	$V = 0, f = 1\text{MHz}$	–	15	–	pF
DETECTOR	Off-State Current	$I_{OFF}$	$V_{OFF} = 400\text{V}$	–	–	1	$\mu\text{A}$
	Capacitance	$C_{OFF}$	$V = 0, f = 1\text{MHz}$	–	–	–	pF

**Coupled Electrical Characteristics (Ta = 25°C)**

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MX.	UNIT
Trigger LED Current		$I_{FT}$	$I_{ON} = 150\text{mA}$	–	1	5	mA
On-State Resistance	A Connection	$R_{ON}$	$I_{ON} = 150\text{mA}, I_F = 10\text{mA}$	–	8	12	$\Omega$
	B Connection		$I_{ON} = 200\text{mA}, I_F = 10\text{mA}$	–	4	6	
	C Connection		$I_{ON} = 300\text{mA}, I_F = 10\text{mA}$	–	2	3	

**Isolation Characteristics (Ta = 25°C)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MX.	UNIT
Capacitance Input to Output	$C_S$	$V_S = 0, f = 1\text{MHz}$	–	0.8	–	pF
Isolation Resistance	$R_S$	$V_S = 500\text{V}, \text{R.H.} \leq 60\%$	$5 \times 10^{10}$	$10^{14}$	–	$\Omega$
Isolation Voltage	$BV_S$	AC, 1 minute	2500	–	–	$V_{\text{rms}}$
		AC, 1 second in oil	–	5000	–	$V_{\text{dc}}$
		DC, 1 minute in oil	–	5000	–	

**Switching Characteristics (Ta = 25°C)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MX.	UNIT
Turn-on Time	$t_{\text{on}}$	$V_{\text{DD}} = 20\text{mA}, R_L = 200\Omega$ $I_F = 10\text{mA}$ (Note 3)	–	0.3	1.0	ms
Turn-off Time	$t_{\text{off}}$		–	0.2	1.0	







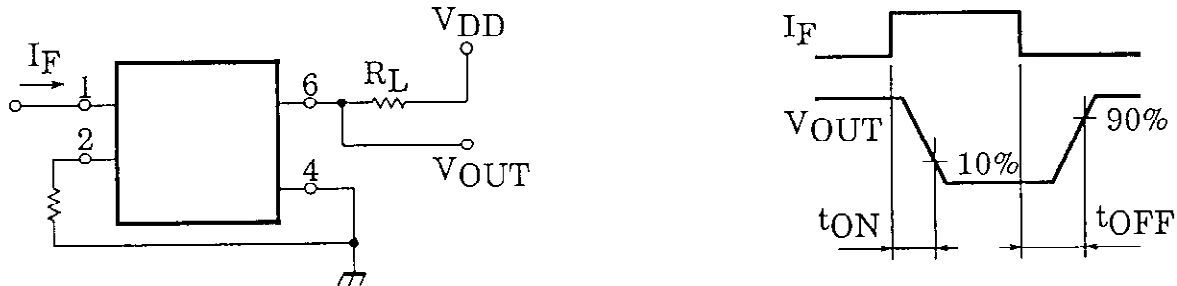



Figure 1. Switching Time Test Circuit

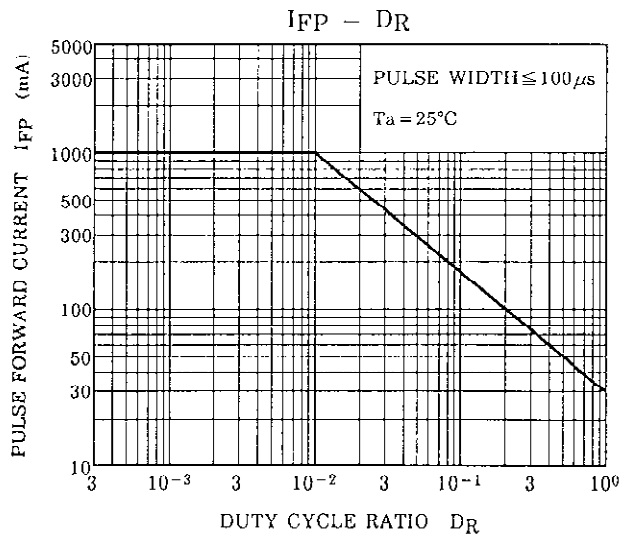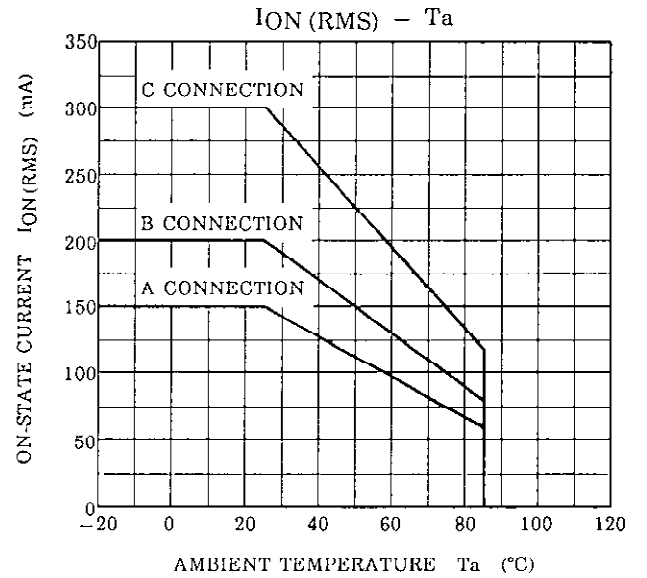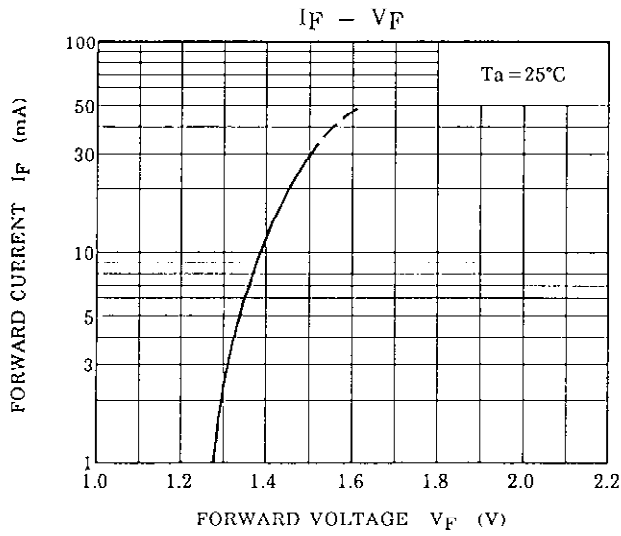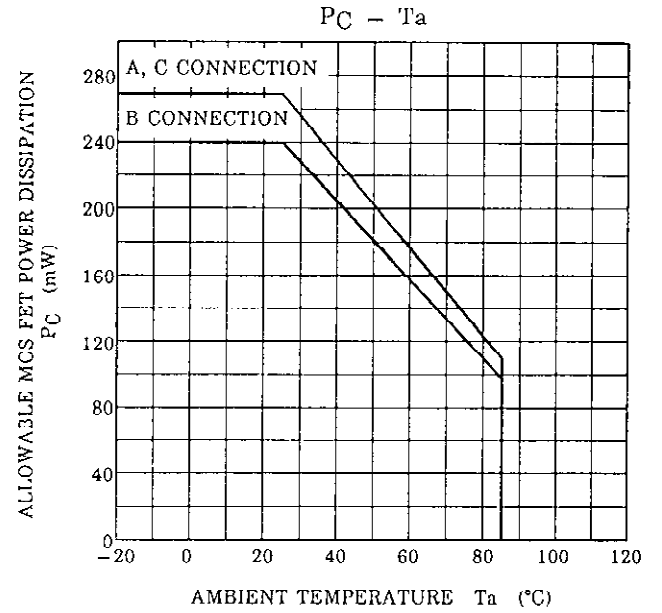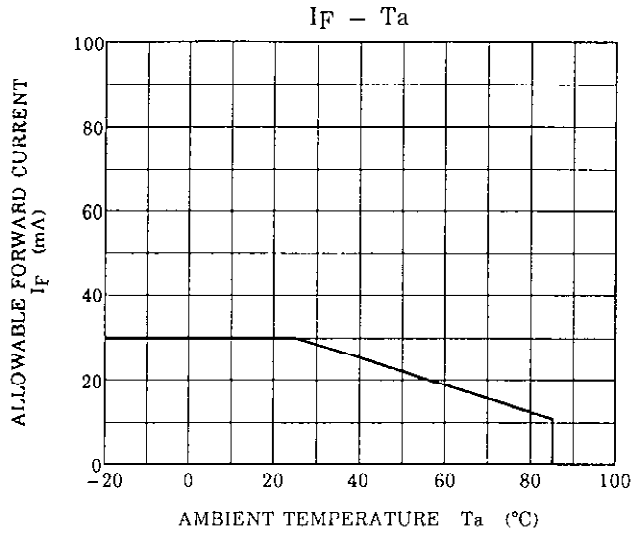


$I_{ON} - I_F$  (A CONNECTION)

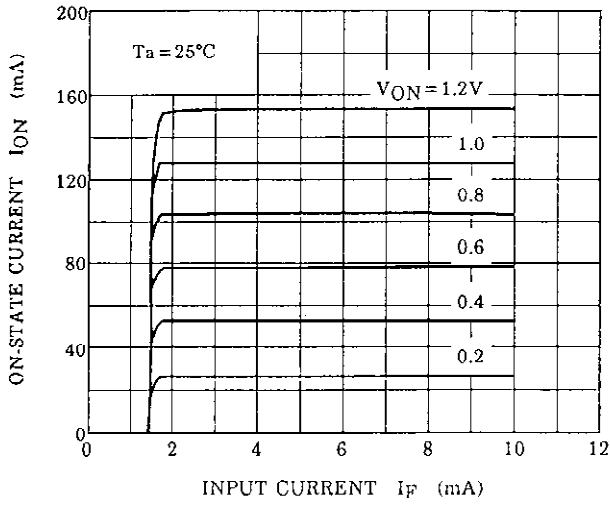


$t_{ON} - I_F$

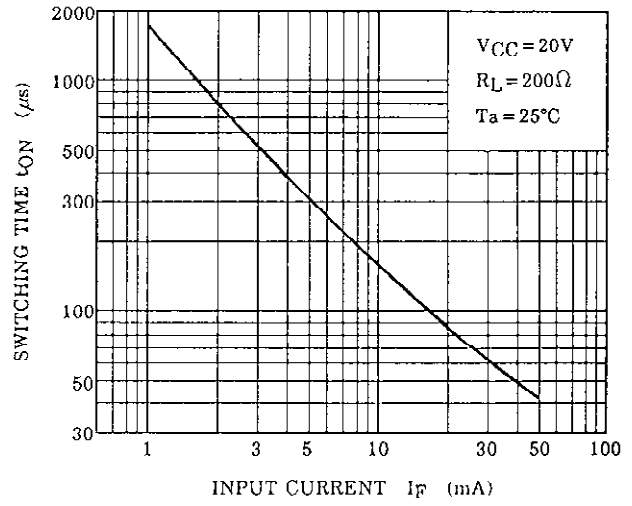


$V_{ON} - I_F$  (A CONNECTION)




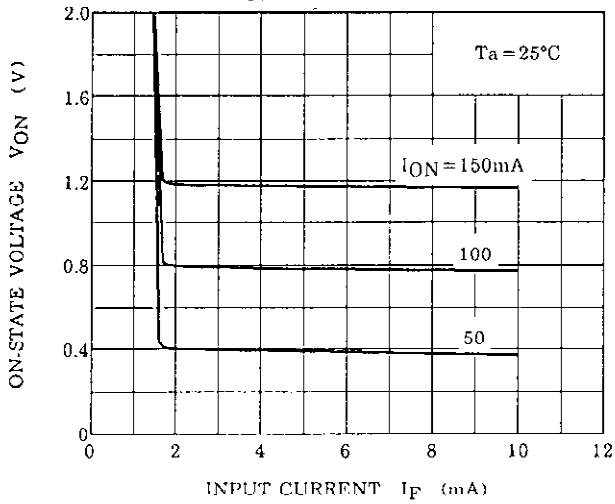


$t_{OFF} - I_F$

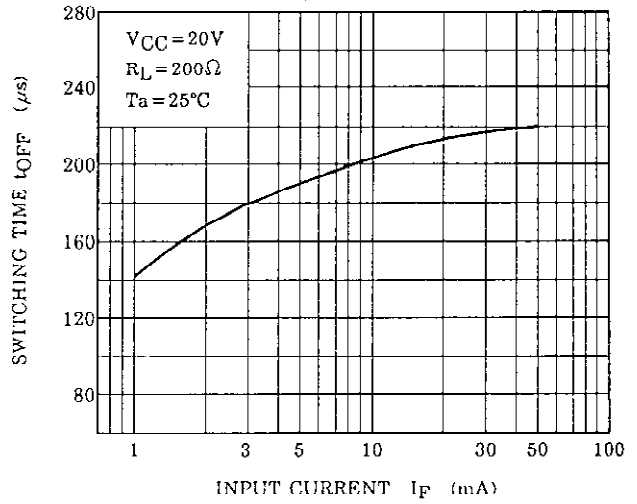

$I_{ON} - V_{ON}$  (A CONNECTION)

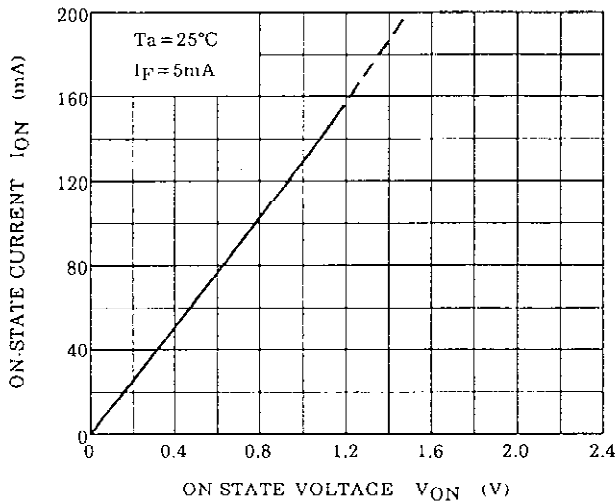

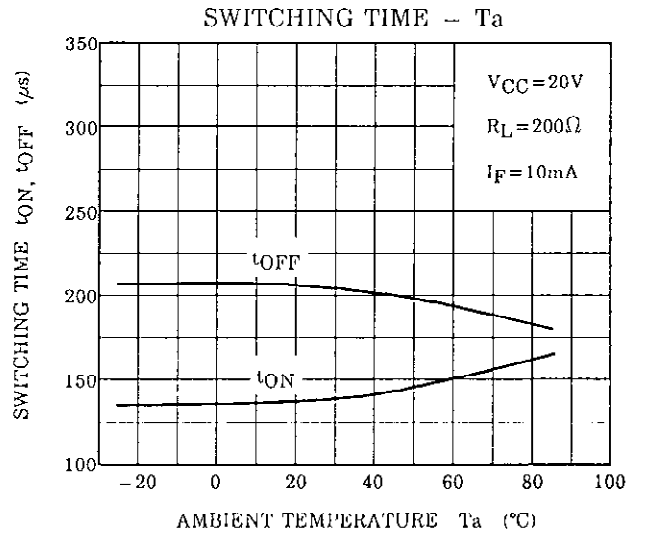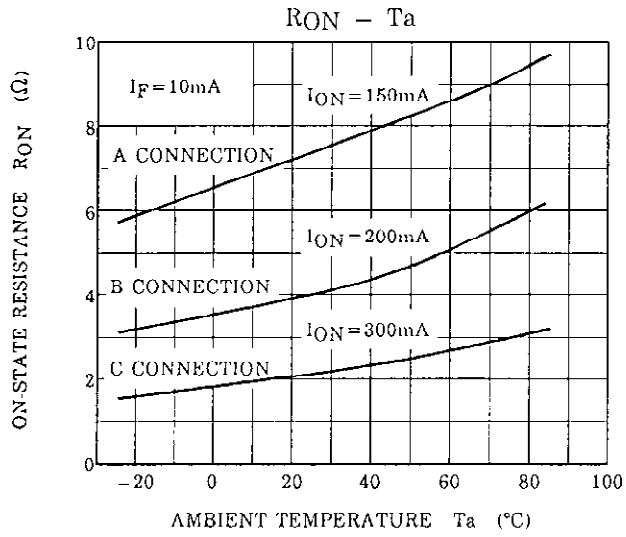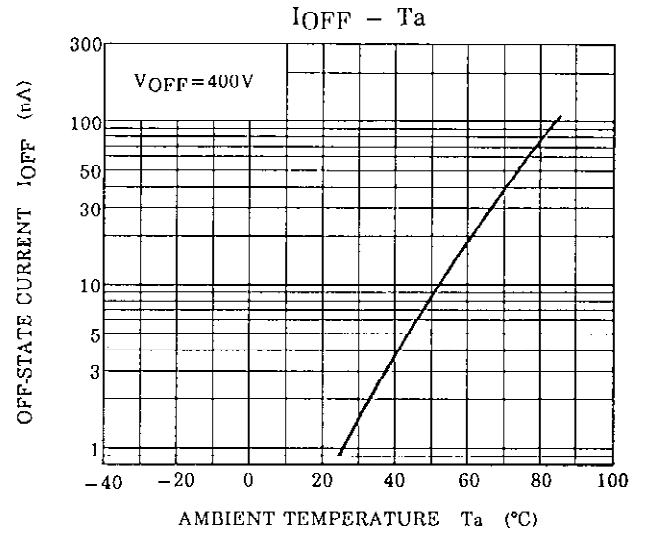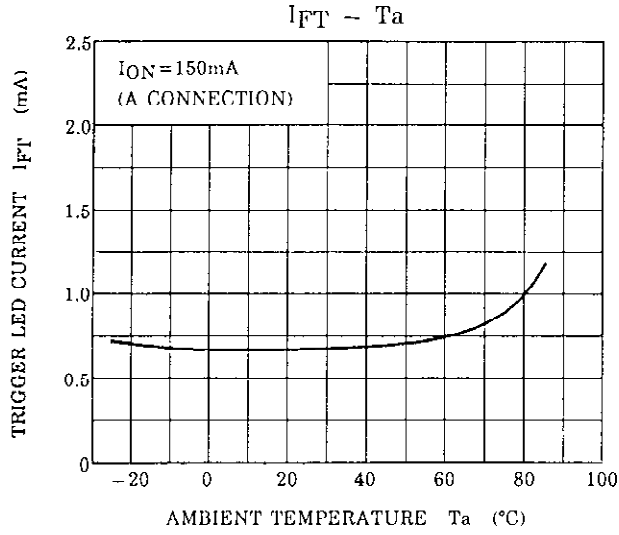

Notes