

## SAC-3P-M12Y/2XM 8FS VP

Order No.: 1683549

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1683549>

Y-distributor/connector M12, with female connector M8, 3-pos.  
connector (parallel)

### Commercial data

EAN	4017918166946
Pack	1 Pcs.
Customs tariff	85366990
Weight/Piece	0.0133 KG
Catalog page information	Page 88 (PC-2007)

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data

#### General data

Nominal current $I_N$	3 A
Nominal voltage $U_N$	60 V
Number of positions	3
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 10 \text{ G}\Omega$
Ambient temperature (operation)	-25 °C ... 90 °C

#### General characteristics

Coding	A - standard
Inflammability class acc. to UL 94	HB

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

### Certificates / Approvals

Approval logo




### requested approbations


Certification	GOST
---------------	------

### Drawings

Dimensioned drawing

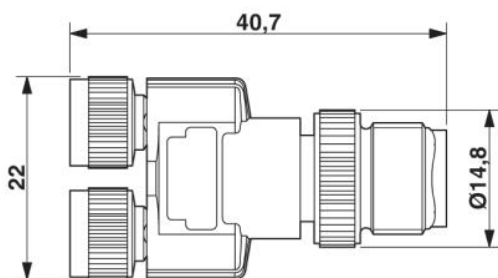


Circuit diagram

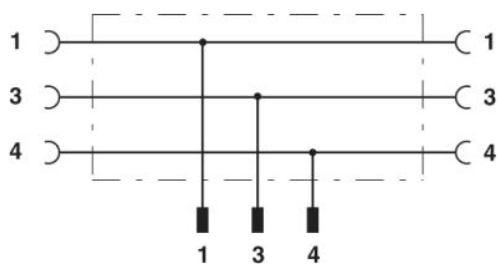


Contact assignment of the M12/M8 Y distributor

Schematic diagram

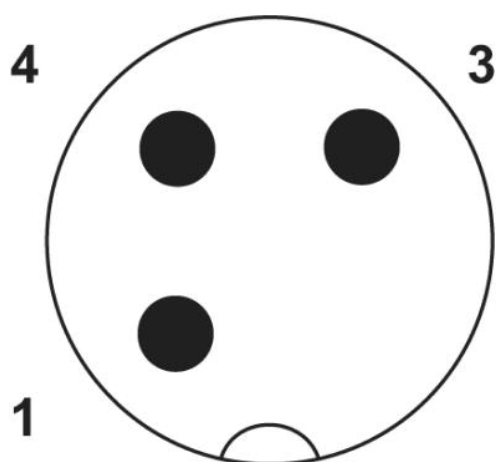

Pin assignment M12 plug, 3-pos., A-coded, view male side

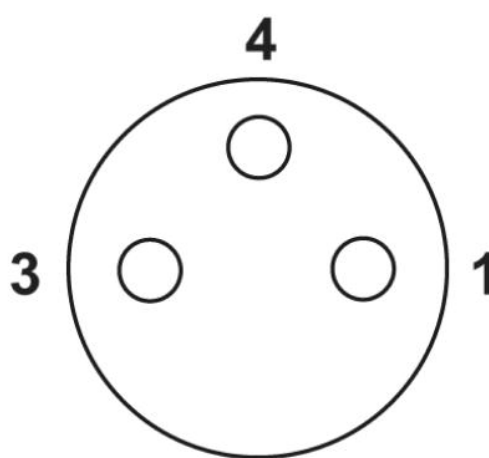

Pin assignment M8 socket, 3-pos., view female side

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;