





INSULATION RELATED SPECIFICATIONS

			 7.62mm pitch TLP721	 10.16mm pitch TLP721F
Minimum Creepage Distance (*)	Cr		7.0mm	8.0mm
Minimum Clearance (*)	Cl		7.0mm	8.0mm
Minimum Insulation Thickness	ti	0.5mm		
Comperative Tracking Index (DIN IEC112/VDE0303, Part 1)	CTI	175 (VDE0110 Teil 1/01.89 Group IIIa)		

((\*) in accordance with DIN VDE0110 Teil 1/01.89, Table 2, & 4)

(\*1) If a printed circuit is incorporated, the creepage distance and clearance may be reduced below this value (e. g. at a standard distance between soldering eye centres of 7.5mm). If this is not permissible, the user shall take suitable measures.

(\*2) This photocoupler is suitable for 'safe electrical isolation' only within the safety limit data.

Maintenance of the safety data shall be ensured by means of protective circuits.

VDE Test sign : Marking on product  
for VDE0884


**4**

Marking on packing  
for VDE0884



**0884**

Marking Example :

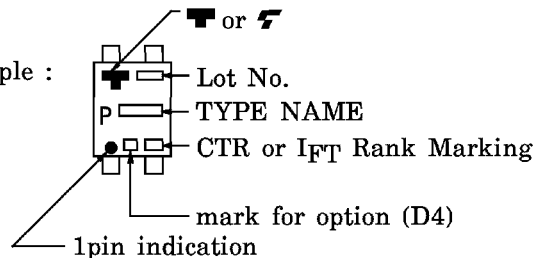

961001EBC2'

- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Figure 1 Partial discharge measurement procedure according to VDE0884  
Destructive test for qualification and sampling tests.

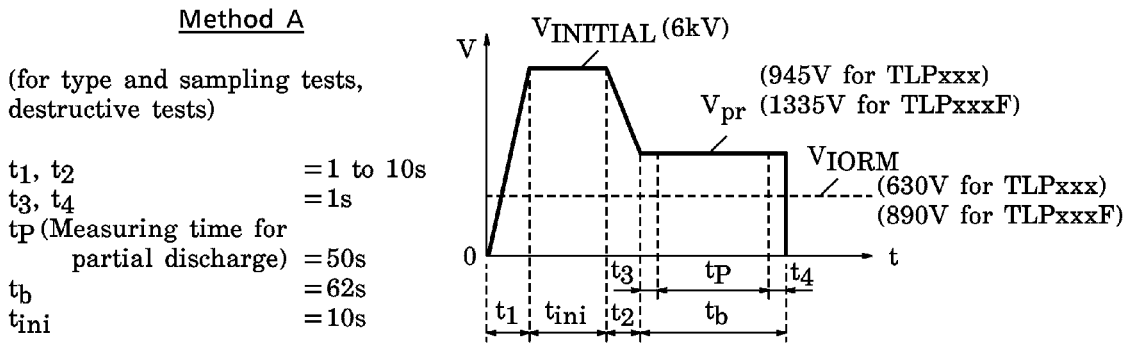


Figure 2 Partial discharge measurement procedure according to VDE0884  
Non-destructive test for 100% inspection.

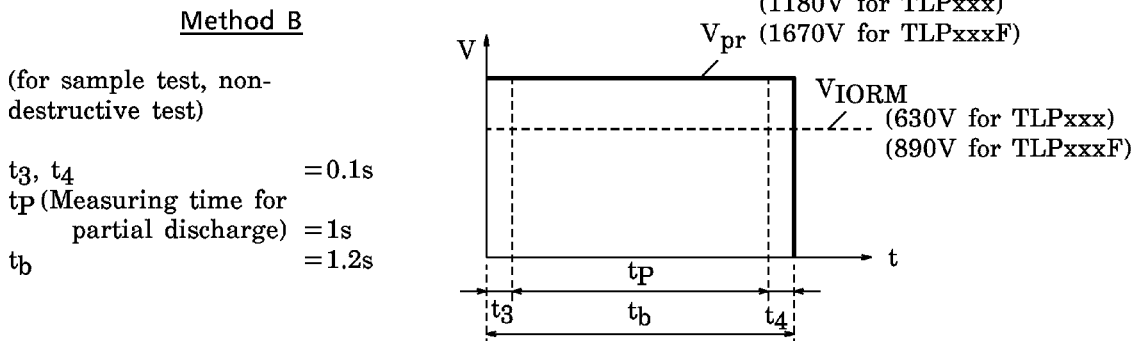


Figure 3 Dependency of maximum safety ratings on ambient temperature

