


- △ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ MATERIAL: POLYESTER FILM 0.025 [.010] THICK, 2 LAYERS EACH SIDE.
- △ COPPER WIRE— 0.23 [.009] THICK x 15.24 [.500] WIDE.
- △ SHIELD— PVC, 0.025 [.010] THICK.
- △ CABLE MARKED WITH "AMP INC PN 553079 TYPE FCC UL CSA 12 AWG, CU 300V, 20 AMP 60° C" IN COLOR SPECIFIED FOR CONTINUOUS LENGTH OF ROLL AS SHOWN.
- △ CAUTION: THE UNDERCARPET CABLE MAY NOT BE USED OUTDOORS OR IN WET LOCATIONS; WHERE THE CABLE WOULD BE SUBJECT TO CORROSIVE VAPORS; IN ANY HAZARDOUS (CLASSIFIED) LOCATION; OR IN RESIDENTIAL, SCHOOL, AND HOSPITAL BUILDINGS.

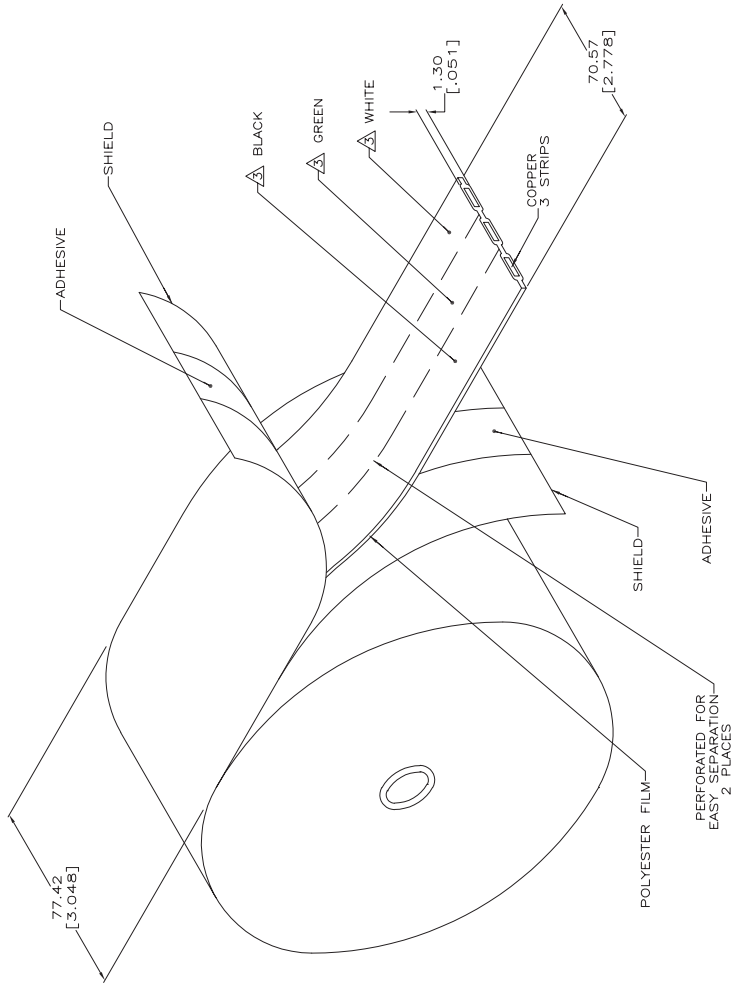

30.7	[100]	3-553079-4
15.5	[50]	3-553079-3
76.5	[250]	3-553079-1

LENGTH PER REEL — M [FEET]

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

TYCO ELECTRONICS CORPORATION
HARRISBURG, PA 17105-5605

REVISIONS

DATE

BY

CHKD

APP'D

108-6038

12 AWG, POWER, UNDERCARPET

100779

553079

CUSTOMER DRAWING