

PART NUMBER	REV	FIRST USED
687395-1	AC	854400-1
7-687395-7	AC	SPARE PARTS KIT



TERMINAL NAME: .250 FLAG FASTON™				
TE P/N	MFG P/N	.018 THK	.018 THK	.016 THK
1949687	SFO-61T-250A	60645	141697	63604
		41531	61156	42511
		41532	63517	42742
		41799	63555	60641
		41800	63651	60712
		41801	100646	63445
		41802		150561
		42041		42404
		150560		STEEL
				1742543
				1742460

TERM APPL SPEC 114-2078

CRIMPING DATA			
PAD LTR	CRIMP HEIGHT	WIRE SIZE	
A	.070 ±.002 [1.78mm±0.05mm]	12	
B	.060 ±.002 [1.52mm±0.05mm]	14	
C	.052 ±.002 [1.32mm±0.05mm]	16	
D	.048 ±.002 [1.22mm±0.05mm]	18	
CRIMP	SIZE	TYPE	RANGE
WIRE	.160 [4.06mm]	TAB LOCK	18-12
INSUL	.180 [4.57mm]	0	.110-.200
FEED	.767	APPL INST	SET UP GAGE
		Δ18031	LAYOUT
WIRE STRIP LENGTH	-		

LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	DN	APVO
A	66	AC	ECR-08-032566	02-2009	CC ND

-1	LEADMAKER G	MECH POST FEED
-77	-	SPARE PARTS KIT

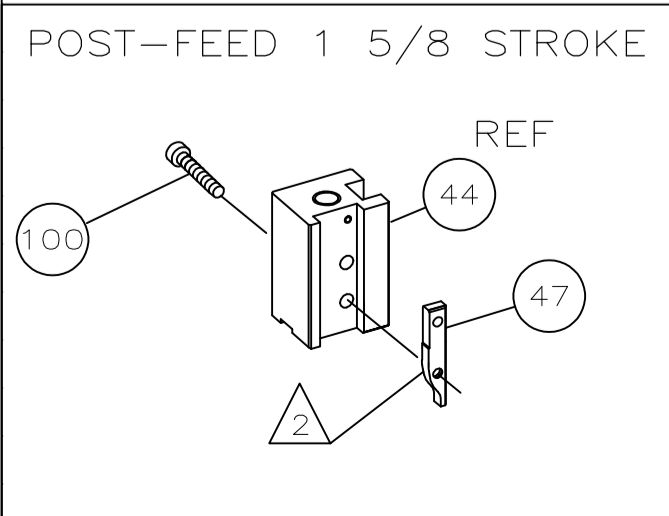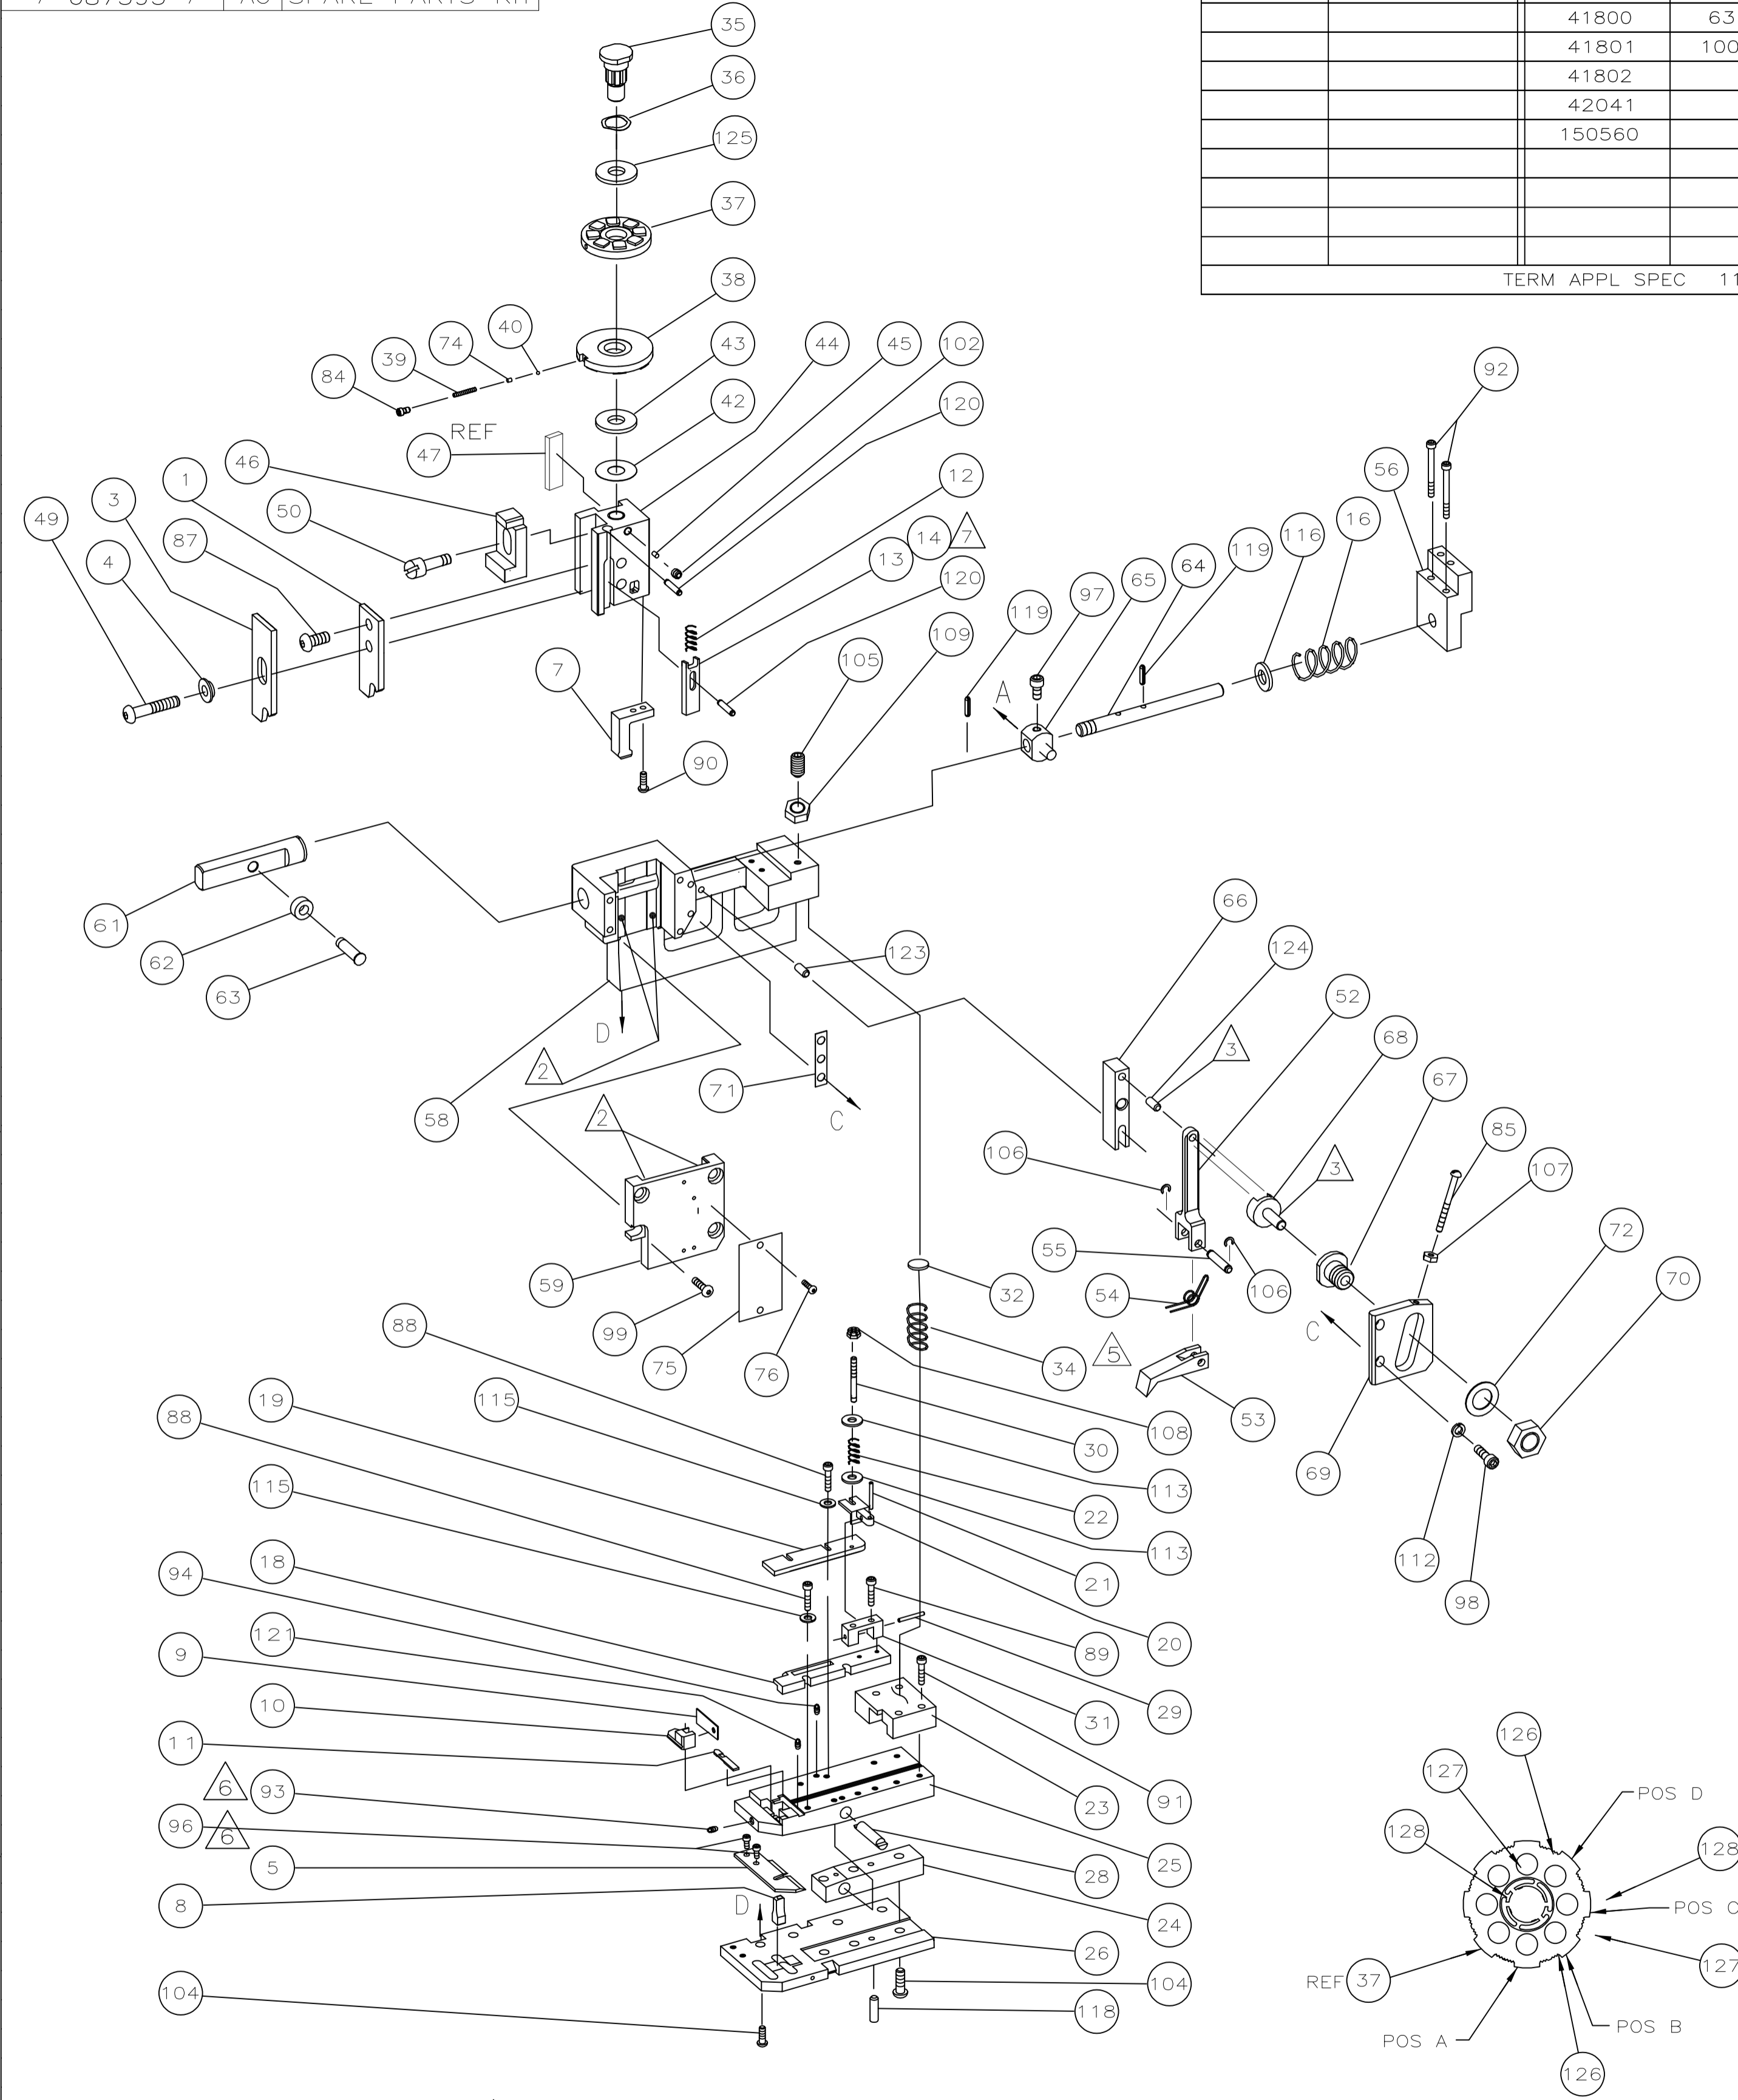

- 1 RECOMMENDED SPARE PARTS.
- 2 GREASE LIGHTLY.
- 3 LUBRICATE DAILY USING NO. 20 MACHINE OIL.
- 4. DO NOT EXCEED 80 C.P.M. WITH THIS APPLICATOR.
- 5. AFTER ASSEMBLY OF APPLICATOR, PROPER SPRING PRESSURE (ITEM 34) CAN BE OBTAINED BY TIGHTENING SET SCREW (ITEM 105) UNTIL CONTACT IS MADE WITH SPACER (ITEM 32) THEN TIGHTEN AN ADDITIONAL 5 1/2 - 6 REVOLUTIONS.

- 6 APPLY LOCTITE TO ITEM 93.
- 7 CHANGE POSITIONER AS REQUIRED TO CENTER TERMINAL OVER ANVIL. FASTEN EXTRA POSITIONER TO APPLICATOR.

- 2 -	5-354779-7	PIN, WIRE DISC (.3275)D	129
- 2 -	4-354779-7	PIN, WIRE DISC (.3225)C	128
- 2 -	3-354779-0	PIN, WIRE DISC (.3140)B	127
- 2 -	1-354779-3	PIN, WIRE DISC (.3055)A	126
- 1 -	986950-1	WASHER, FLAT PRECISION	125
- 1 -	1-21030-2	PIN, DOWEL (Ø.187X.62)	124
- 1 -	1-21030-6	PIN, DOWEL (Ø.187X1.25)	123
- 1 -			122
- 1 -	3-21028-2	PIN, SLOTTED SPRING (Ø.094X.25)	121
- 2 -	4-21028-9	PIN, SLOTTED SPRING (Ø.125X.38)	120
- 2 -	5-21028-1	PIN, SLOTTED SPRING (Ø.125X.50)	119
- 1 -	21029-5	PIN, SLOTTED SPRING (Ø.188X.75)	118
- 1 -			117
- 1 -	21899-4	WASHER, FLAT (5/16)	116
- 4 -	21024-4	WASHER, LOCK (#8)	115
- 1 -			114
- 2 -	21899-2	WASHER, FLAT (#10)	113
- 2 -	21024-5	WASHER, LOCK (#10)	112
- 1 -			111
- 1 -			110
- 1 -	1-22202-7	NUT, HEX (5/16-24)	109
- 1 -	21022-3	NUT, HEX (LOCKING)(10-32)	108
- 1 -	21018-5	NUT, HEX (6-32)	107
- 2 -	21045-3	RING, RET "C" (Ø.187)FD PIN	106
- 1 -	8-21007-5	SCREW, SKT SET(5/16-24x.75)	105
- 7 -	2-22733-8	SCREW, BHC (1/4-20X.63)	104
- 1 -			103
- 1 -	21009-2	SCREW, SKT SET(1/4-20x.25)	102
- 1 -			101
- 1 -	3-21000-9	SCREW, SHC (10-32X1.00)	100
- 4 -	3-21000-8	SCREW, SHC (8-32X2.00)	99
- 2 -	3-21000-6	SCREW, SHC (10-32X.62)	98
- 1 -	3-21000-4	SCREW, SHC (10-32X.38)	97
- 2 -	7-21000-6	SCREW, SHC (10-32X.38)	96
- 1 -			95
- 1 -	4-21006-5	SCREW, SKT SET (8-32X.62)	94
- 1 -	21061-9	SCREW, SKT SET (8-32X.25)	93
- 2 -	9-21000-3	SCREW, SHC (8-32X2.00)	92
- 4 -	2-21000-9	SCREW, SHC (8-32X.75)	91
- 2 -	1-23030-1	SCREW, SHC (NYLOK)(8-32X.62)	90
- 2 -	2-21000-8	SCREW, SHC (8-32X.62)	89
- 4 -	2-22603-3	SCREW, HEX (8-32X.62)	88
- 1 -	2-21002-1	SCREW, BHC (8-32X.38)	87
- 1 -			86
- 1 -	6-23715-5	SCR, PAN HD(6-32x1.50)FEED ADJ	85
- 1 -	23030-1	SCREW, SHC(NYLOK)(6-32X.38)	84
- 1 -			83
- 1 -			82
- 1 -			81
- 1 -			80
- 1 -			79
- 1 -			78
- 1 -			77
- 2 -	21017-2	SCR, DRIVE(#2X.19)ID	76
- 1 -	461264-1	PLATE, IDENTIFICATION	75
- 1 -	690603-1	SPRING, ASSIST	74
- 1 -			73
- 1 -	458109-1	WASHER, SPECIAL	72
- 1 -	690517-1	SPACER	71
- 77 -1	U/M	PART NO	DESCRIPTION
			ITEM NO
QTY	PARTS LIST		

- 1 -	22594-8	NUT, HEX	70
- 1 -	240628-1	PLATE, ADJ	69
- 1 -	240626-1	SHAFT, PIVOT	68
- 1 -	240633-1	BUSHING	67
- 1 -	240630-1	LEVER, INTERMEDIATE	66
- 1 -	1804317-1	BLOCK, PIVOT	65
- 1 -	1633286-1	SCR, ADJ	64
- 1 -	240659-3	PIN, CAM ROLLER	63
- 1 -	240658-1	ROLER, CAM	62
- 1 -	240631-1	ROD, FEED	61
- 1 -			60
- 1 -	455164-1	CAP ASSEMBLY	59
- 1 -	455162-1	HOUSING	58
- 1 -			57
- 1 -	1804319-1	GUIDE, FEED ROD	56
- 1 -	240624-1	PIN, FEED FINGER	55
- 1 -	691499-1	SPRING, FEED FINGER	54
- 1 -	454568-1	FINGER, FEED	53
- 1 -	240634-1	LEVER, TERMINAL	52
- 1 -			51
- 1 -	22353-8	SCREW, SHOULDER	50
- 1 -	3-21002-5	BOLT, CRIMPER	49
- 1 -			48
- 1 -	238015-1	CAM, POST-FEED 1 5/8 ST	47
- 1 -	690578-1	BLOCK, INSULATION ADJUST	46
- 1 -	690191-1	PLUG, NYLON	45
- 1 -	454574-1	RAM	44
- 1 -	690125-1	WASHER, LAMINATED	43
- 1 -	690124-4	WASHER, RAM	42
- 1 -			41
- 1 -	23241-6	BALL, STEEL	40
- 1 -	690170-1	SPRING, COMPRESSION	39
- 1 -	690142-1	DISC, INSULATION	38
- 1 -	354777-1	WIRE DISC, PLASTIC	37
- 1 -	22480-5	WASHER, SPRING	36
- 1 -	690212-1	POST, RAM	35
- 1 -	3-23846-5	SPRING, HINGE BAR	34
- 1 -			33
- 1 -	690573-1	SPACER, SPRING	32
- 1 -	454569-1	MOUNT, DRAG	31
- 1 -	1-22354-8	STUD, DRAG	30
- 1 -	21030-2	PIN, MOUNT, DRAG	29
- 1 -	1633530-1	PIN, HINGE	28
- 1 -			27
- 1 -	684905-1	PLATE, BASE	26
- 1 -	454579-2	HINGE BAR	25
- 1 -	690571-1	BLOCK, STABILIZER	24
- 1 -	690585-1	BLOCK, PRESSURE	23
- 1 -	22282-5	SPRING, DRAG	22
- 1 -	21030-6	LEVER, DRAG	21
- 1 -	454570-1	DRAG, STOCK	20
- 1 -	454573-1	GUIDE, STRIP (REAR)	19
- 1 -	454571-1	GUIDE, STRIP (FRONT)	18
- 1 -			17
- 1 -	4-22284-9	SPRING, FEED RETURN	16
- 1 -			15
- 1 -	1-692134-3	POSITIONER, TERMINAL	14
- 1 -	692134-1	POSITIONER, TERMINAL	13
- 1 -	5-22280-5	SPRING, TERM. POSITIONER	12
- 1 -	454711-1	PLATE, REAR SHEAR	11
- 1 -	454709-1	ANVIL INSERT	10
- 1 -	690569-1	PLATE, FRONT SHEAR	9
1 1 1	690575-1	ANVIL	8
- 1 -	454575-4	BLADE, SLUG	7
- 1 -			6
- 1 -	684906-1	PLATE, ANVIL RETAINING	5
- 1 -	690574-1	SPACER, TUBULAR INSUL CRIMPER	4
1 1 1	690588-2	CRIMPER, INSULATION	3
- 1 -			2
1 1 1	690587-1	CRIMPER, WIRE	1
- 77 -1	U/M	PART NO	DESCRIPTION
			ITEM NO
QTY	PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± .005	1 PLC ± .005	2 PLC ± .005	3 PLC ± .005	4 PLC ± .005	ANGLES ± .005
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	

APPROVED: J. ELBIN, 09-14-99

END FEED HINGE BAR APPLICATOR

SCALE: NTS SHEET 1 OF 1 REV AC