

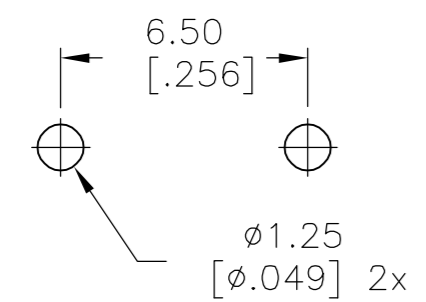
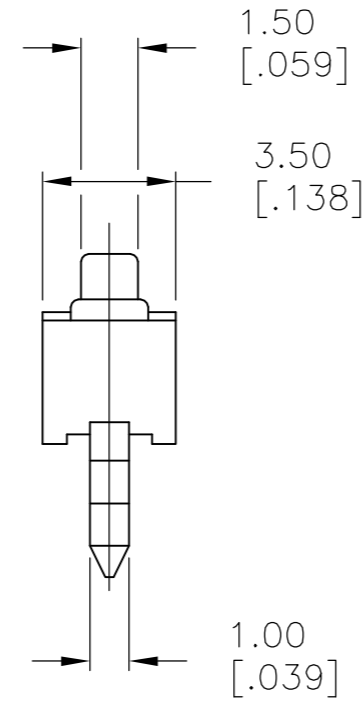


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	ECO-07-001263		13FEB2007	RB	MS	

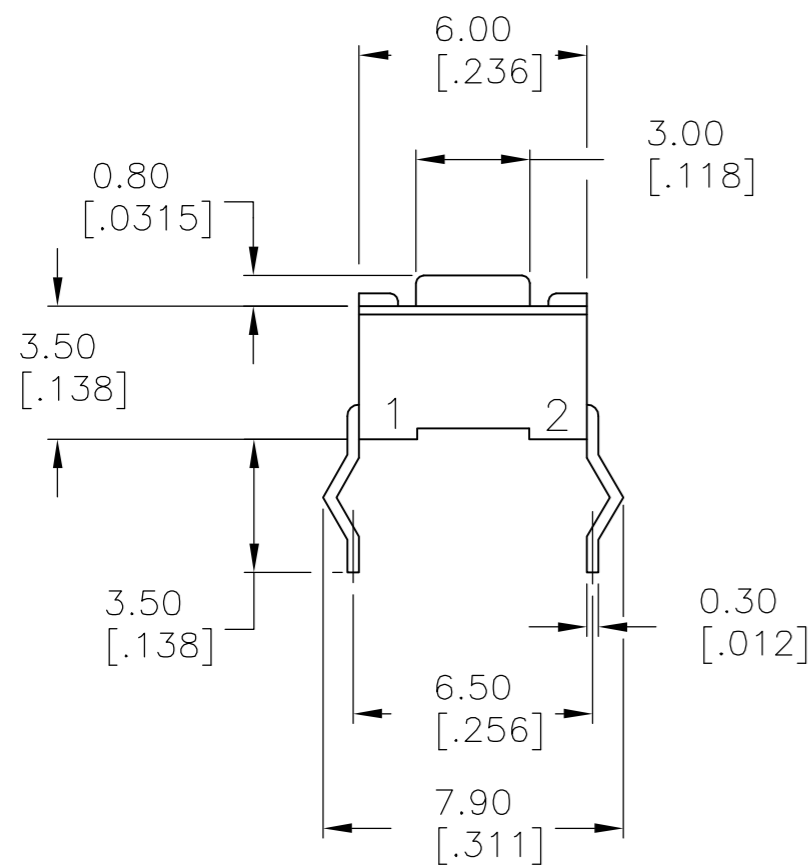

P.C. HOLE LAYOUT  
 TOLERANCE ±.002,  
 UNLESS OTHERWISE NOTED

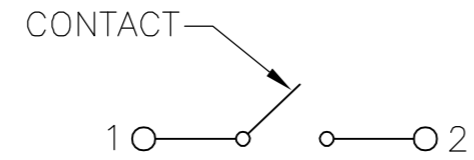

CIRCUIT DIAGRAM  
 NOTE: TERMINAL NUMBERS  
 ARE FOR REFERENCE ONLY  
 AND DO NOT APPEAR ON  
 SWITCHES.

**SPECIFICATIONS:**

**Materials:**  
 Case, Nylon 66, UL94HB, Natural finish  
 Cover, Stainless Steel  
 Actuator, PBT UL94HB, Black  
 Moving contact, Copper Alloy, Silver finish  
 Fixed contact/Terminal, Copper Alloy, Silver over Nickel finish

**Electrical:**  
 Max Contact Rating, 50mA@ 24V DC, Per EIA-448, Method 6  
 Min Contact Rating, 10microamp@1V DC  
 Initial Contact resistance, 50 milliohms max, Per EIA-364-23B, each position  
 Insulation Resistance, 1000 Megohm min. Per EIA-364-21C each position  
 Dielectric strength, 500 V AC for 1 minute, Per EIA-364-20B, Condition 1, each position.  
 Life Expectancy, 100,000 cycles

**Mechanical:**  
 Actuation force, SEE P/N TABLE  
 Actuation Travel, .25 +.20/-.10 mm  
 Life Expectancy, 100,000 cycles min (2 cycles per second and 150% actuation force),  
 Per EIA-448 Methods 8 and 9  
 Vibration, Per EIA 364-28D, Condition VII, Level E  
 Mechanical Shock, Per EIA-364-27C, Condition A

**Environmental:**  
 Operating Temperature, -35 to +85 degrees C, Per EIA-448, Method 10  
 Storage Temperature, -35 to +85 degrees C  
 Humidity and Temperature Cycling Per EIA-364-31B, Method III  
 Thermal Shock, Per EIA-364-32C, -35 to +85 degrees C  
 Solderability, Per EIA-364-52, Class 2, Category 1, Temp, 245 degrees C max,  
 Time, 2.5 seconds max, 95% Minimum coverage  
 Resistance to Solder Heat, Per 109-202, Condition B  
 1. No change in initial electrical and mechanical characteristics

**NOTES:**

- ALL MATERAILS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(ROHS).

100,000	130±50gf	FSMCH	1825966-1
LIFE CYCLE	ACTUATION FORCE	ALCO PART NUMBER	TYCO PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 13FEB2007	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK M SARVER 13FEB2007	NAME TACT SWITCH, 3.5 x 6.0 x 4.3 mm, HIGH TEMP, FSMCH	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD M SARVER 13FEB2007	DRAWING NO A2 00779 C=1825966	
MATERIAL SEE SPECIFICATIONS		FINISH SEE SPECIFICATIONS	WEIGHT -	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1	REV A