



Features

- Coax TV & Communication Station Protector in a compact enclosure
- cUL_{US} Listed per UL 1863

BOURNS®

7041 Series – Station Enclosure

The Model 7041 Series combines the Bourns 1740 Series of Coax broadband protectors and station protectors (optional) into a compact residential protector enclosure. Refer to the respective data sheets for additional information on the elements that make up this system.

How To Order

7041 - 1X - XX

Model Number Designator _____

Comm Protector _____
 0 = None
 1 = Yes (not available in U.S.A.)

Comm Protector Type _____
 E = 155HS-MSP (2378-35-HS) Broadband Voice/Data Systems
 Y = 155HS-BC* (2378-35-BC) Balance-Sensitive DSL Systems

B = 125EW (2374-01) Sealed Gas Tube (UL, Bellcore)
 C = 125EW-R (2375-01) Sealed Gas Tube (REA, UL, CSA)
 M = J130S (2380-27-01) Solid State Protector (UL)
 O = No Station Protectors

* BC = For DSL systems requiring capacitive balance ≤ 1pF.
 Standard packaging is 50 units per box.


Coax Protector Type _____

Part Number	Protector Sparkover Voltage	Description
2 = 1740-15	150V	Standard CATV
3 = 1740-23	230V	CATV/Tel with ring voltage
4 = 1740-35	350V	CATV/Tel with ring voltage

Product Dimensions

High	Wide	Deep
144.8	86.4	55.9
(5.7)	(3.4)	(2.2)

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

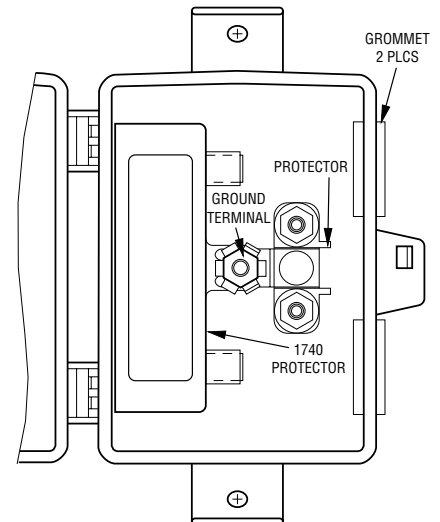

All offered protectors are UL approved.



Reliable Electronic Solutions

Asia-Pacific:

TEL +886- (0)2 25624117

FAX +886- (0)2 25624116

Europe:

TEL +41-41 7685555

FAX +41-41 7685510

North America:

TEL +1-909 781-5500

FAX +1-909 781-5700

bourns.com