October 1988 Revised March 2000

# DM74LS136 Quad 2-Input Exclusive-OR Gate with Open-Collector Outputs

#### **General Description**

FAIRCHILD

SEMICONDUCTOR


This device contains four independent gates, each of which performs the logic exclusive-OR function.

#### **Ordering Code:**

Order Number	Package Number	Package Description
DM74LS136M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow
DM74LS136N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

### **Connection Diagram**



#### Truth Table

Inp	uts	Output	
Α	В	Z	
L	L	L	
L	н	н	
н	L	н	
н	н	L	

H = HIGH Voltage Level L = LOW Voltage Level

© 2000 Fairchild Semiconductor Corporation DS009819

www.fairchildsemi.com

## Absolute Maximum Ratings(Note 1)

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	$0^{\circ}C$ to $+70^{\circ}C$
Storage Temperature Range	-65°C to +150°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

## **Recommended Operating Conditions**

Symbol	Parameter	Min	Nom	Max	Units
V <sub>CC</sub>	Supply Voltage	4.75	5	5.25	V
VIH	HIGH Level Input Voltage	2			V
/ <sub>IL</sub>	LOW Level Input Voltage			0.8	V
OL	LOW Level Output Current			8	mA
Γ <sub>A</sub>	Free Air Operating Temperature	0		70	°C

#### **Electrical Characteristics**

Over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 2)	Max	Units
VI	Input Clamp Voltage	$V_{CC} = Min, I_I = -18 \text{ mA}$			-1.5	V
I <sub>CEX</sub>	HIGH Level Output Current	$V_{CC} = Min, V_O = 5.5V$			100	μΑ
V <sub>OL</sub>	LOW Level Output Voltage	$V_{CC} = Min, I_{OL} = Max$ $V_{IH} = Min$		0.35	0.5	V
		$I_{OL} = 4 \text{ mA}, V_{CC} = Min$		0.25	0.4	
I <sub>I</sub>	Input Current @ Max Input Voltage	$V_{CC} = Max, V_I = 7V$			0.2	mA
I <sub>IH</sub>	HIGH Level Input Current	$V_{CC} = Max, V_I = 2.7V$			40	μΑ
IIL	LOW Level Input Current	$V_{CC} = Max, V_I = 0.4V$			-0.6	mA
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = Max			10	mA


Note 2: All typicals are at V\_{CC} = 5V, T\_A = 25^{\circ}C.

Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

## **Switching Characteristics**

at  $V_{CC}=5V$  and  $T_A=25^\circ C$ 

	Parameter	R <sub>L</sub> =	Units	
Symbol		C <sub>L</sub> = 15 pF		
		Min	Max	
t <sub>PLH</sub>	Propagation Delay Time		23	ns
	LOW-to-HIGH Level Output		25	
t <sub>PHL</sub>	Propagation Delay Time		23	ns
	HIGH-to-LOW Level Output		23	115

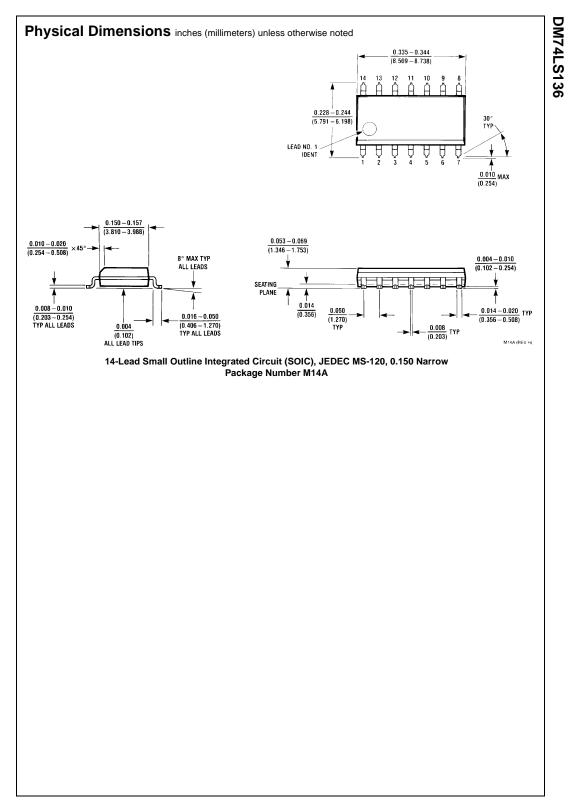

www.fairchildsemi.com

