

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	EGSM Rx (50/50)	DATE	May 22, 2003
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary

Table 1. Electrical specifications

Passband: 925 ~ 960 MHz						
Item	Condition	Specification		Unit	Remark	
		Min.	Тур.	Max.	Oiit	
Insertion loss	925 -960 MHz	_	2.3	2.6	dB	+25+/-2°C
		-	-	3.3	dB	
Ripple	925 -960 MHz	_	0.9	1.6	dB	+25+/-2°C
		-	-	1.8	dB	
Absolute attenuation	D.C880 MHz	40	53	-	dB	
	880-905 MHz	25	39	-	dB	
	905-915 MHz	18	30	-	dB	
	980-1025 MHz	23	30	-	dB	
	1025-2000 MHz	35	50	-	dB	
	2000-3000 MHz	30	46	-	dB	
	3000-6000 MHz	25	40	-	dB	
Input VSWR	Unbalance	-	1.7	2.1	-	
Output VSWR	Balance	-	1.7	2.1	-	
Amplitude balance	925 -960 MHz	-1.0	-	+1.0	dB	
Phase balance	925 -960 MHz	170	-	190	deg.	
Input impedance	Unbalance	50		ohm		
Output impedance	Balance	50		ohm		
Input power	880 -915 MHz	+13		dBm	1/4 duty	
Operating temperature		-30 to +85		°C		
Device size		2.5	x 2.0. x 1.0	max.	mm	

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED		
System	EGSM Rx (50/50)	DATE	May 22, 2003	
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary	


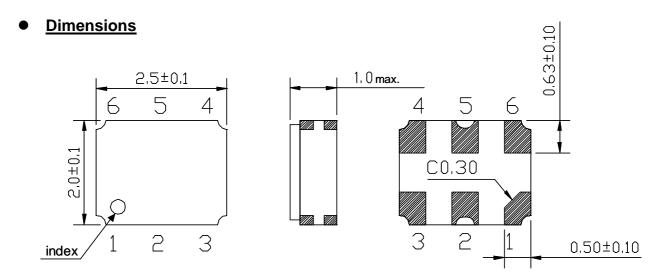


Fig.1 Unit: mm

Pin Configuration

Pin No.	Symbol	Function
1	GND	Ground
2	IN	Unbalanced pin
3	GND	Output
4	OUT	Balanced pin
5	GND	Ground
6	OUT	Balanced pin

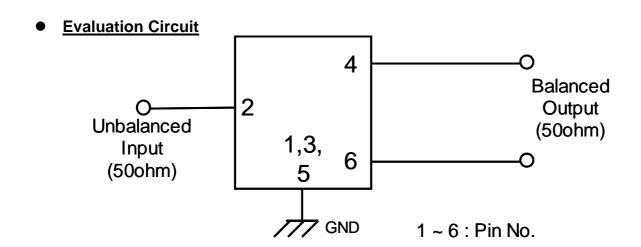

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	EGSM Rx (50/50)	DATE	May 22, 2003
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary



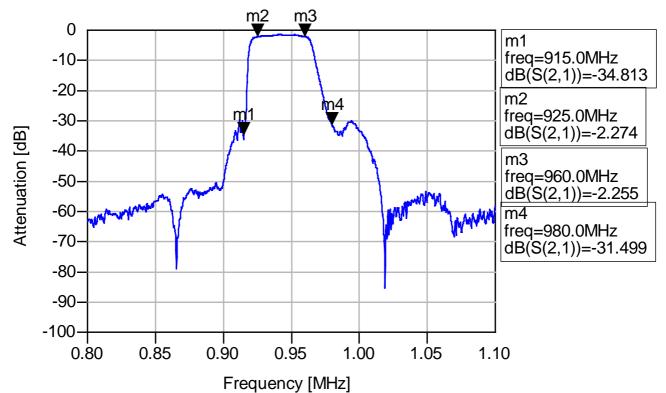


Fig.1 Pass-band Characteristics

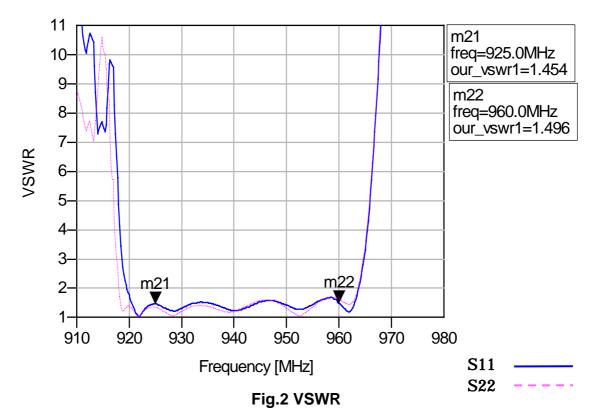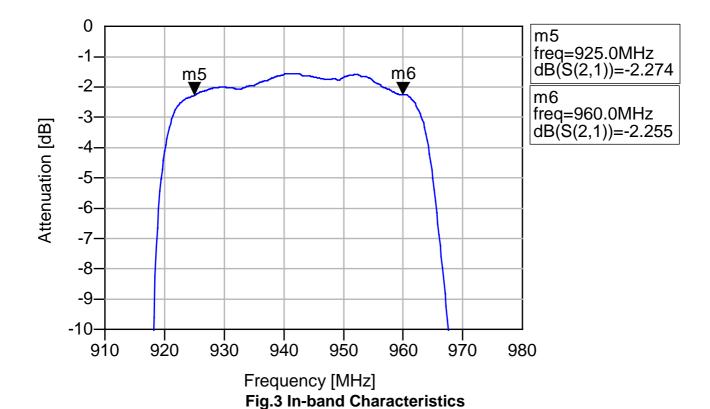

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	EGSM Rx (50/50)	DATE	May 22, 2003
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary



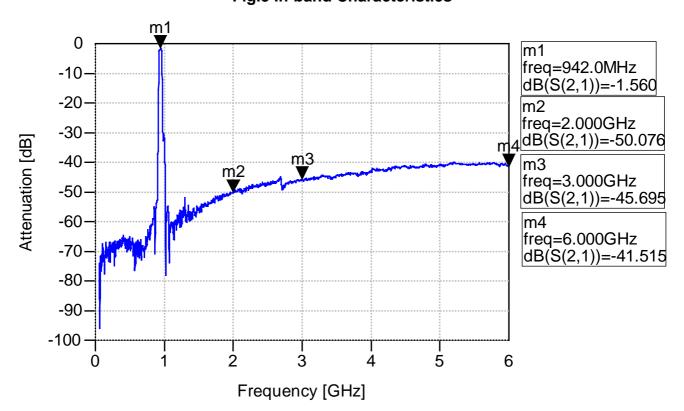
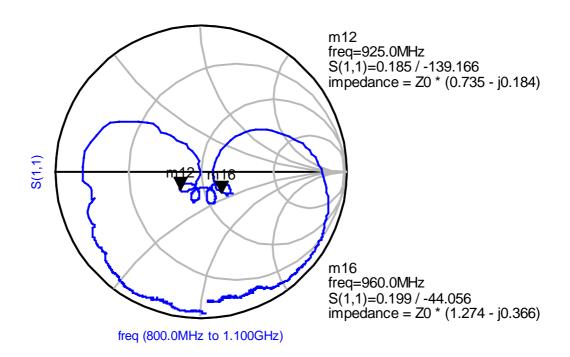


Fig.4 Wide-band Characteristics

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	EGSM Rx (50/50)	DATE	May 22, 2003
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary



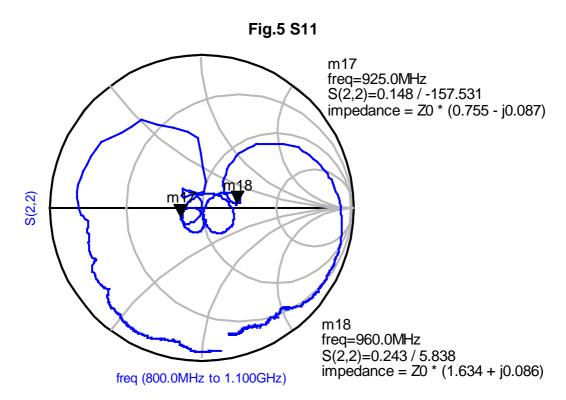
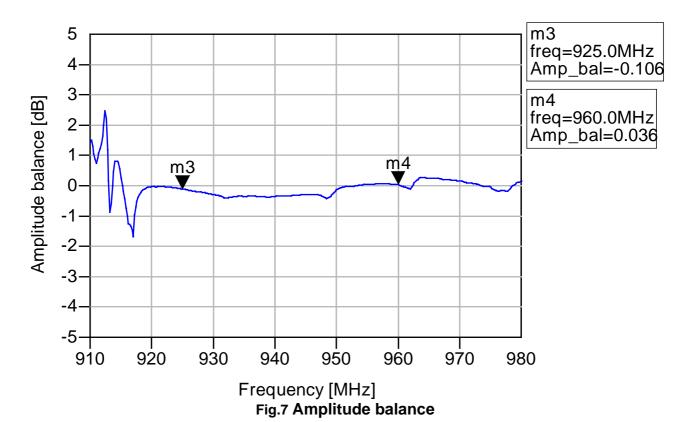


Fig.6 S22

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	EGSM Rx (50/50)	DATE	May 22, 2003
FMD Part Number	FAR-F5CQ-942M50-B25A	Version 4.0	Preliminary



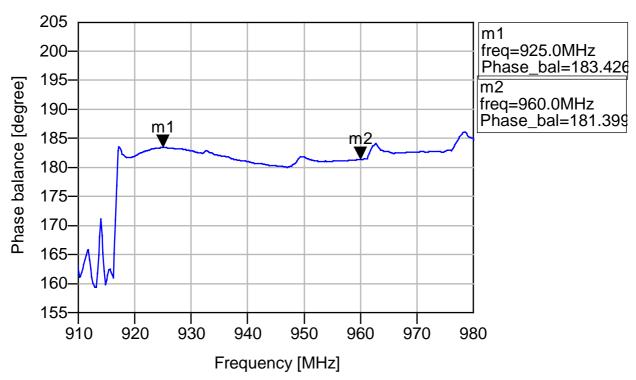


Fig.8 Phase balance