


2WAY-0° POWER SPLITTER / COMBINERS

Designer's Kit **K1-ZX10+**

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION!

FREE deluxe storage case

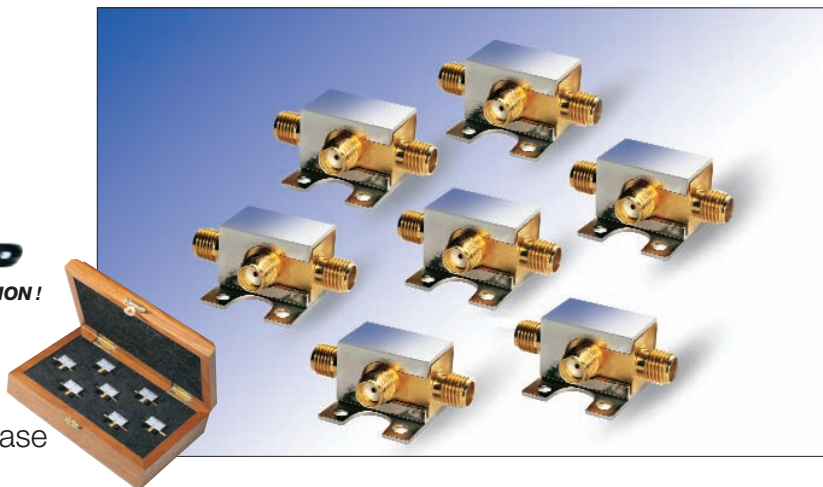

2 to 12600MHz

ZX10+ Features

- Low insertion loss
- Excellent amplitude unbalance
- Very good phase unbalance
- Rugged unibody construction
- SMA-F connectors
- Small Size (L) 0.74" x (W) 0.90" x (H) 0.54"
dimensions include case bracket
- Low cost

\$199⁹⁵
only *ea. kit (7 models, 1 of each, 7 total)*

Kit K1-ZX10+ Electrical specifications of each model

Model	Frequency (MHz)	Isolation (dB)		Ins. Loss (dB) Above 3dB		Phase Unbal. (Degrees)	Ampl. Unbal. (dB)
		Typ.	Min.	Typ.	Max.	Max.	Max.
ZX10-2-12+	2-1200	21	16	0.50	1.5	3.0	0.5
ZX10-2-20+	200-2000	20	16	0.80	2.2	6.0	0.4
ZX10-2-25+	1000-2500	20	14	1.20	2.2	10.0	1.2
ZX10-2-42+	1900-4200	23	10	0.20	1.0	3.0	0.3
ZX10-2-71+	2950-7100	23	10	0.25	0.9	3.0	0.4
ZX10-2-98+	4750-9800	23	10	0.30	1.2	9.0	0.5
ZX10-2-126+	7400-12600	23	10	0.30	1.3	10.0	0.5

Protected under U.S. Patents 6,790,049 & 6,963,255



All models are RoHS compliant

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
M105263
K1-ZX10+