
SCLS117B - DECEMBER 1982 - REVISED MAY 1997

- Synchronous Load
- Direct Overriding Clear
- Parallel-to-Serial Conversion
- Package Options Include Plastic Small-Outline (D) and Ceramic Flat (W) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

description

The 'HC166 parallel-in or serial-in, serial-out registers feature gated clock (CLK, CLK INH) inputs and an overriding clear (CLR) input. The parallel-in or serial-in modes are established by the shift/load (SH/LD) input. When high, SH/LD enables the serial (SER) data input and couples the eight flip-flops for serial shifting with each clock (CLK) pulse. When low, the parallel (broadside) data inputs are enabled, and synchronous loading occurs on the next clock pulse. During parallel loading, serial data flow is inhibited. Clocking is accomplished on the low-to-high-level edge of CLK through a 2-input positive-NOR gate permitting one input to be used as a clock-enable or clock-inhibit function. Holding either CLK or CLK INH high inhibits clocking; holding either low enables the other clock input. This allows the system clock to be free running, and the register can be stopped on command with the other clock input. CLK INH should be changed to the high level only when CLK is high. CLR overrides all other inputs, including CLK, and resets all flip-flops to zero.

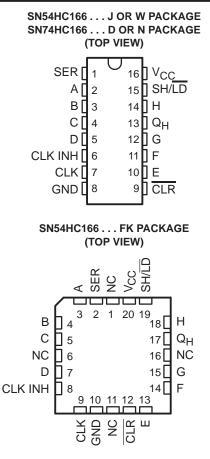

NC - No internal connection

The SN54HC166 is characterized for operation over the full military temperature range of –55°C to 125°C. The SN74HC166 is characterized for operation from –40°C to 85°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




Copyright © 1997, Texas Instruments Incorporated

SCLS117B - DECEMBER 1982 - REVISED MAY 1997

FUNCTION TABLE												
		IND	IITE			0	OUTPUT	S				
	INPUTS						INTERNAL					
CLR	SH/LD	CLK INH	CLK	SER	PARALLEL AH	QA	QB	QH				
L	Х	Х	Х	Х	Х	L	L	L				
н	Х	L	L	Х	Х	Q _{A0}	Q_{B0}	Q _{H0}				
н	L	L	\uparrow	Х	ah	а	b	h				
н	Н	L	\uparrow	Н	Х	н	Q _{An}	Q _{Gn}				
н	Н	L	\uparrow	L	Х	L	Q _{An}	Q _{Gn}				
н	Х	Н	\uparrow	Х	Х	Q _{A0}	Q _{B0}	Q _{H0}				


logic symbol[†]

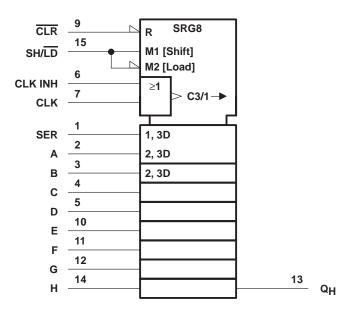

 \dagger This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, N, and W packages.




SCLS117B - DECEMBER 1982 - REVISED MAY 1997

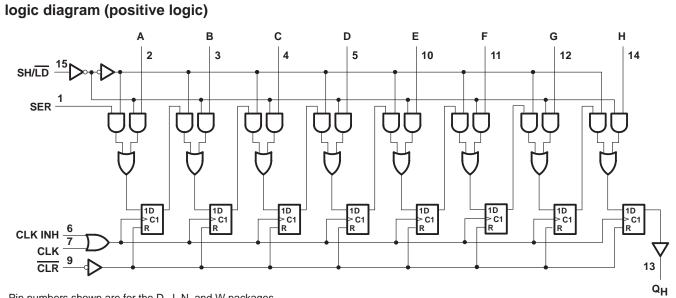

Pin numbers shown are for the D, J, N, and W packages.



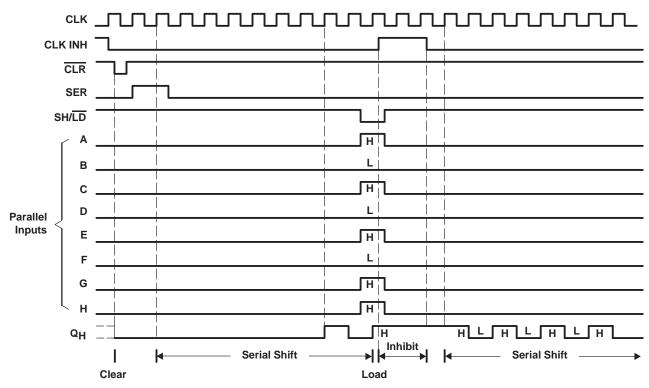



SCLS117B - DECEMBER 1982 - REVISED MAY 1997

absolute maximum ratings over operating free-air temperature range[†]

Supply voltage range, V _{CC}	–0.5 V to 7 V
Input clamp current, I_{IK} (V _I < 0 or V _I > V _{CC}) (see Note 1)	±20 mA
Output clamp current, I_{OK} (V _O < 0 or V _O > V _{CC}) (see Note 1)	±20 mA
Continuous output current, $I_O (V_O = 0 \text{ to } V_{CC})$	±25 mA
Continuous current through V _{CC} or GND	±50 mA
Package thermal impedance, θ_{JA} (see Note 2): D package	113°C/W
N package	78°C/W
Storage temperature range, T _{stg}	–65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

recommended operating conditions

			SN	154HC16	6	SN	V74HC16	6	UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
VCC	Supply voltage		2	5	6	2	5	6	V
		$V_{CC} = 2 V$	1.5			1.5			
VIH	High-level input voltage	$V_{CC} = 4.5 V$	3.15			3.15			V
		$V_{CC} = 6 V$	4.2			4.2			
		$V_{CC} = 2 V$	0		0.5	0		0.5	
\vee_{IL}	Low-level input voltage	$V_{CC} = 4.5 V$	0		1.35	0		1.35	V
		$V_{CC} = 6 V$	0		1.8	0		M MAX 5 6 0.5 1.35 1.8 VCC VCC 1000 500 400	
VI	Input voltage		0		VCC	0		VCC	V
VO	Output voltage		0		VCC	0		VCC	V
		$V_{CC} = 2 V$	0		1000	0		1000	
tt‡	Input transition (rise and fall) time	$V_{CC} = 4.5 V$	0		500	0		500	ns
		$V_{CC} = 6 V$	0		400	0		400	
Тд	Operating free-air temperature		-55		125	-40		85	°C

[‡] If this device is used in the threshold region (from V_{IL}max = 0.5 V to V_{IH}min = 1.5 V), there is a potential to go into the wrong state from induced grounding, causing double clocking. Operating with the inputs at t_t = 1000 ns and V_{CC} = 2 V does not damage the device; however, functionally, the CLK inputs are not ensured while in the shift, count, or toggle operating modes.



SCLS117B - DECEMBER 1982 - REVISED MAY 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		N	T _A = 25°C			SN54HC166		SN74HC166		UNIT
PARAMETER	TEST CC	INDITIONS	Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	1.9	1.998		1.9		1.9		
		I _{OH} = -20 μA	4.5 V	4.4	4.499		4.4		4.4		
∨он	$V_I = V_{IH} \text{ or } V_{IL}$	I_{OH} or VIL $6 V$ 5.9 5.9 5.9 $I_{OH} = -4 \text{ mA}$ $4.5 V$ 3.98 4.3 3.7 3.84 $I_{OH} = -5.2 \text{ mA}$ $6 V$ 5.48 5.8 5.2 5.34 $2 V$ 0.002 0.1 0.1 0.1		V							
		I _{OH} = -4 mA	4.5 V	3.98	4.3		3.7		3.84		
		I _{OH} = -5.2 mA	6 V	5.48	5.8		5.2		5.34		
		I _{OL} = 20 μA	2 V		0.002	0.1		0.1		0.1	V
			4.5 V		0.001	0.1		0.1		0.1	
VOL	$V_I = V_{IH} \text{ or } V_{IL}$		6 V		0.001	0.1		0.1		0.1	
		I _{OL} = 4 mA	4.5 V		0.17	0.26		0.4		0.33	
		I _{OL} = 5.2 mA	6 V		0.15	0.26		0.4		0.1	
lį	$V_I = V_{CC} \text{ or } 0$		6 V		±0.1	±100		±1000		±1000	nA
ICC	$V_{I} = V_{CC} \text{ or } 0,$	I _O = 0	6 V			8		160		80	μΑ
Ci			2 V to 6 V		3	10		10		10	pF



SCLS117B - DECEMBER 1982 - REVISED MAY 1997

timing requirements over recommended operating free-air temperature range (unless otherwise
noted)

				T _A =	25°C	SN54H	IC166	SN74H	IC166	
			Vcc	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	0	6	0	4.2	0	5	
fclock	Clock frequency		4.5 V	0	31	0	21	0	25	MHz
	t _w Pulse duration		6 V	0	36	0	25	0	29	
			2 V	100		150		125		
		CLR low	4.5 V	20		30		25		
	Dulas duration		6 V	17		26		21		
t _w Pulse duration		2 V	80		120		100		ns	
		CLK high or low	4.5 V	16		24		20		
			6 V	14		20		17		
			2 V	145		220		180		
		SH/LD high before CLK↑	4.5 V	29		44		36		
			6 V	25		38		31		
			2 V	80		120		100		
		SER before CLK↑	4.5 V	16		24		20		
			6 V	14		20		17		
		CLK INH low before CLK [↑]	2 V	100		150		125		
t _{su}	Setup time		4.5 V	20		30		25		ns
			6 V	17		26		21		
			2 V	80		120		100		
		Data before CLK↑	4.5 V	16		24		20		
			6 V	14		20		17		
			2 V	40		60		50		
		CLR inactive before CLK [↑]	4.5 V	8		12		10		
			6 V	7		10		9		
			2 V	0		0		0		
		SH/LD high after CLK↑	4.5 V	0		0		0		
			6 V	0		0		0		
			2 V	5		5		5		
		SER after CLK↑	4.5 V	5		5		5		
÷.	Hold time		6 V	5		5		5		20
t _h Hold time			2 V	0		0		0		ns
		CLK INH high after CLK↑	4.5 V	0		0		0		
			6 V	0		0		0		
			2 V	5		5		5		
		Data after CLK1	4.5 V	5		5		5		
			6 V	5		5		5		



SCLS117B - DECEMBER 1982 - REVISED MAY 1997

switching characteristics over recommended operating free-air temperature range, $C_L = 50 \text{ pF}$ (unless otherwise noted) (see Figure 1)


PARAMETER	FROM	то	Vaa	Т	_ = 25°C	;	SN54H	IC166	SN74H	IC166	UNIT
PARAMETER	(INPUT)	(OUTPUT)	Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX 5 5 5 5 5 150 30 26 190 38 32 95 19	UNIT
			2 V	6	11		4.2		5		
f _{max}			4.5 V	31	36		21		25		MHz
			6 V	36	45		25		MIN MAX 5		
			2 V		62	120		180		150	
^t PHL	CLR	Q _H	4.5 V		18	24		36		30	
			6 V		13	20		31		26	
			2 V		75	150		225		190	
^t pd	CLK	Q _H	4.5 V		15	30		45		38	ns
			6 V		13	26		38		32	
			2 V		38	75		110		95	
tt		Any	4.5 V		8	15		22		19	ns
			6 V		6	13		19		16	

operating characteristics, T_{A} = 25°C

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C _{pd}	Power dissipation capacitance	No load	50	pF



SCLS117B - DECEMBER 1982 - REVISED MAY 1997

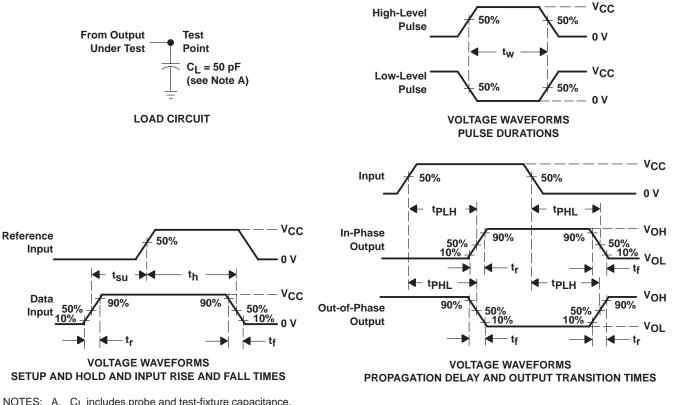

PARAMETER MEASUREMENT INFORMATION

NOTES: A. CL includes probe and test-fixture capacitance.

- B. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, Z_O = 50 Ω , t_f = 6 ns, t_f = 6 ns.
- C. For clock inputs, fmax is measured when the input duty cycle is 50%.
- D. The outputs are measured one at a time with one input transition per measurement.

E. tPLH and tPHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms



IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated