

November 2003 Revised January 2005

# FSA1156 • FSA1157 Low R<sub>ON</sub> Low Voltage SPST Analog Switch

### **General Description**

The FSA1156 and FSA1157 are high performance Single Pole/Single Throw (SPST) analog switches. The devices feature ultra low  $R_{ON}$  of  $0.75\Omega$  (typical) and will operate over the wide  $V_{CC}$  range of 1.65V to 5.5V. The devices are fabricated with sub-micron CMOS technology to achieve fast switching speeds. The select input is TTL level compatible. The FSA1156 has Normally Open operation and the FSA1157 has Normally Closed operation.

#### **Features**

- Maximum  $0.9\Omega$  On Resistance (R<sub>ON</sub>) for 4.5V supply at  $25^{\circ}$ C
- $\blacksquare \ 0.3\Omega$  maximum R  $_{\mbox{ON}}$  flatness for 4.5V supply
- Broad V<sub>CC</sub> operating range: 1.65V to 5.5V
- Fast turn-on and turn-off time
- Over-voltage tolerant TTL compatible control input
- Available in SC70 and MicroPak™ space saving surface mount packages
- Available in Lead (Pb) Free MicroPak packaging

## **Ordering Code:**


	Product			
Order Number	Code	Package	Package Description	Supplied As
	Top Mark	Number		
FSA1156P6	156	MAA06A	6-Lead SC70, EIAJ SC88, 1.25mm Wide	250 Units on Tape and Reel
FSA1156P6X	156	MAA06A	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel
FSA1156P6X_NL	156	MAA06A	Pb-Free 6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel
FSA1156L6X	EH	MAC06A	Pb-Free 6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel
FSA1157P6	157	MAA06A	6-Lead SC70, EIAJ SC88, 1.25mm Wide	250 Units on Tape and Reel
FSA1157P6X	157	MAA06A	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel
FSA1157L6X	EJ	MAC06A	Pb-Free 6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

 $\label{eq:microPak} \mbox{MicroPak}^{\mbox{\tiny TM}} \mbox{ is a trademark of Fairchild Semiconductor Corporation}.$ 


## **Analog Symbols**

#### Pin Assignments for SC70 Package



(Top View) FSA1156 (Normally Open)

#### Pin Assignments for SC70 Package




(Top View) FSA1157 (Normally Closed)

### **Truth Table**

Control Input (S)	Function of FSA1156	Function of FSA1157
L	OFF	ON
Н	ON	OFF


H = HIGH Logic Level L = LOW Logic Level

#### Pin Assignments for MicroPak™



(Top Through View) FSA1156 (Normally Open)

#### Pin Assignment for MicroPak™



(Top Through View) FSA1157 (Normally Closed)

## **Pin Descriptions**

Pin Name	Description
A, B	Data Ports
S	Control Input
NC	No Connect

## **Absolute Maximum Ratings**(Note 1)

# Recommended Operating Conditions (Note 3)

Supply Voltage (V<sub>CC</sub>) -0.5V to +6.0V 1.65V to 5.5V Switch Voltage (Note 2) –0.5V to  $V_{CC}$  +0.5V Supply Voltage (V<sub>CC</sub>) -0.5V to +6.0VInput Voltage (V<sub>IN</sub>) (Note 2) Control Input Voltage (Note 3) 0V to  $V_{CC}$ 0V to  $V_{CC}$ Input Diode Current -50 mA Switch Input Voltage -40°C to 85°C Switch Current 200 mA Operating Temperature

Peak Switch Current Thermal Resistance  $\theta_{JA}$  in Still Air

(Pulsed at 1mS duration, SC70 package 350°C/W

<10% Duty Cycle) 400 mA

Power Dissipation at 85°C

SC70 package 180 mW Storage Temperature Range ( $T_{STG}$ )  $-60\,^{\circ}\text{C}$  to +150 $^{\circ}\text{C}$  Maximum Junction Temperature ( $T_{J}$ ) +150 $^{\circ}\text{C}$ 

Lead Temperature (T<sub>L</sub>)

(Soldering, 10 seconds) +260°C
ESD (Human Body Model) 8000V

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Control input must be held HIGH or LOW and it must not float.

## DC Electrical Characteristics (all typical values are at 25°C unless otherwise specified)

Symbol	Parameter	V <sub>CC</sub>	T <sub>A</sub> = +25 °C		$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	
Symbol	r ai ailletei	(V)	Min	Тур	Max	Min	Max	Ullits	Conditions
V <sub>IH</sub>	Input Voltage HIGH	2.7 to 3.6				2.0		V	
		4.5 to 5.5				2.4		V	
V <sub>IL</sub>	Input Voltage LOW	2.7 to 3.6					0.6	V	
		4.5 to 5.5					0.8	V	
I <sub>IN</sub>	Control Input Leakage	2.7 to 3.6				-1.0	1.0	μА	$V_{IN} = 0V$ to $V_{CC}$
		4.5 to 5.5				-1.0	1.0	μА	VIN = 0 V to VCC
I <sub>NO(OFF)</sub> ,	OFF Leakage	5.5	-2.0		2.0	-20.0	20.0	nA	A = 1V, 4.5V
I <sub>NC(OFF)</sub>	Current	5.5	-2.0		2.0	-20.0	20.0	IIA	B = 4.5V, 1V
I <sub>A(ON)</sub>	ON Leakage	5.5	-4.0		4.0	-40.0	40.0	nA	A = 1V, 4.5V
	Current	5.5	-4.0		4.0	-40.0	40.0	ш	B = 1V, 4.5V or Floating
R <sub>ON</sub>	Switch On Resistance	2.7		1.4	2.1		2.5	Ω	I <sub>OUT</sub> = 100mA, B = 1.5V
	(Note 4)	4.5		0.75	0.9		1.0	22	I <sub>OUT</sub> = 100mA, B = 3.5V
R <sub>FLAT(ON)</sub>	On Resistance Flatness	2.7		0.6				Ω	I <sub>OUT</sub> = 100mA, B <sub>0</sub> = 0V, 0.75V,1.5V
	(Note 5)	4.5		0.1	0.2		0.3	22	$I_{OUT} = 100 \text{mA}, B_0 = 0 \text{V}, 1 \text{V}, 2 \text{V}$
I <sub>CC</sub>	Quiescent Supply	3.6		0.1	0.5		1.0		$V_{IN} = 0V$ or $V_{CC}$ , $I_{OLIT} = 0V$
	Current	5.5		0.1	0.5		1.0	μА	VIN - OV OI VCC, IOUT = OV

Note 4: On Resistance is determined by the voltage drop between A and B pins at the indicated current through the switch.

Note 5: Flatness is defined as the difference between the maximum and minimum value of On Resistance over the specified range of conditions.


# AC Electrical Characteristics (all typical value are at 25°C unless otherwise specified)


Symbol	Parameter	V <sub>CC</sub>	7	A = +25 °	С	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	Figure
		(V)	Min	Тур	Max	Min	Max	Omis	Conditions	Number
t <sub>ON</sub>	Turn ON Time	2.7 to 3.6		30.0	40.0		45.0	ns	B = 1.5V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 35 pF B = 3.0V, R <sub>L</sub> = 50Ω, C <sub>L</sub> = 35 pF	Figure 1
		4.5 to 5.5		15.0	20.0		25.0	115	$B = 3.0V, R_L = 50\Omega, C_L = 35 pF$	i iguie i
t <sub>OFF</sub>	Turn OFF Time	2.7 to 3.6		25.0	35.0		45.0	ns	$B = 1.5V, R_L = 50\Omega, C_L = 35 pF$	Figure 1
		4.5 to 5.5		22.0	30.0		40.0	115	$B = 3.0V, R_L = 50\Omega, C_L = 35 pF$	i iguie i
Q	Charge Injection	2.7 to 3.6		10.0				рС	$C_L = 1.0 nF, V_{GE} = 0 V,$	Figure 2
		4.5 to 5.5		20.0				рС	$R_{GEN} = 0\Omega$	
OIRR	OFF- Isolation	2.7 to 3.6		-65.0				dB	$f = 1MHz, R_1 = 50\Omega$	Figure 3
		4.5 to 5.5		-65.0				uБ	-	i iguie 3
BW	-3db Bandwidth	2.7 to 3.6		300				MHz	$R_1 = 50\Omega$	Figure 4
		4.5 to 5.5		300				IVII IZ	INL = 3022	i iguie 4
THD	Total Harmonic	2.7 to 3.6		0.001				%	$R_L = 600\Omega$ , $V_{IN} = 0.5V$ PP,	Figure 5
	Distortion	4.5 to 5.5		0.001				/0	f = 20Hz to 20kHz	i igule 5

# Capacitance

Symbol Param	Parameter	V <sub>CC</sub>		T <sub>A</sub> = +25°C	;	Units	Conditions	Figure
	r di dinotoi	(V)	Min	Тур	Max		Conditions	Number
C <sub>IN</sub>	Control Pin Input Capacitance	0		3.0		pF	f = 1MHz	Figure 6
C <sub>OFF</sub>	A/B Port OFF Capacitance	4.5		20.0		pF	f = 1MHz	Figure 6
C <sub>ON</sub>	A/B Port ON Capacitance	4.5		65.0		pF	f = 1MHz	Figure 6

# **Typical Operating Characteristics**

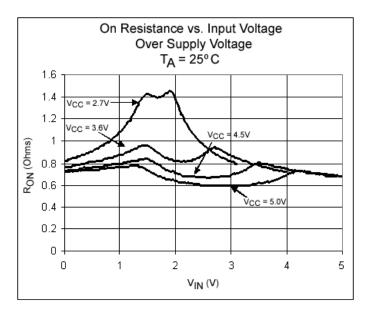

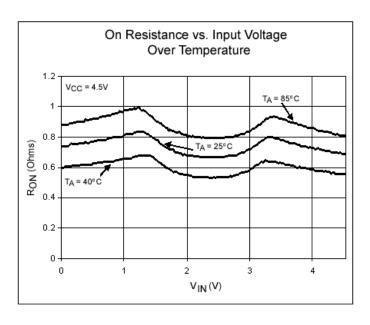

# **AC Loading and Waveforms** $t_r = t_f = 2 \text{ ns}$ 10% - 90% Control Input - 0.9 x V<sub>OUT</sub> -0.9 x V<sub>OUT</sub> Switch Output Logic Input Waveforms Inverted for Switches that have the Opposite Logic Sense $\mathbf{C}_{\mathbf{L}}$ Includes Fixture and Stray Capacitance FIGURE 1. Turn ON/OFF Timing $\Delta v_{\mathsf{OUT}}$ Vcc $\mathsf{R}_{\mathsf{GEN}}$ OFF OFF ON ON OFF OFF Control Input $Q = (\Delta V_{OUT})(C_L)$ FIGURE 2. Charge Injection V<sub>CC</sub> 10nF OFF-ISOLATION = $20\log \frac{V_{OUT}}{V_{IN}}$ NETWORK ANALYZER 50N 50Ω $ON-LOSS = 20log \frac{V_{OUT}}{V_{IN}}$ 0V or $V_{\mbox{\footnotesize CC}}$ Vcc 0dBm MEAS FIGURE 3. OFF Isolation

# AC Loading and Waveforms (Continued)




FIGURE 4. Bandwidth




FIGURE 5. Harmonic Distortion





FIGURE 6. ON/OFF Capacitance


# **Tape and Reel Specification**


TAPE FORMAT for SC70

., = . •				
Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
P6X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

### TAPE DIMENSIONS inches (millimeters)

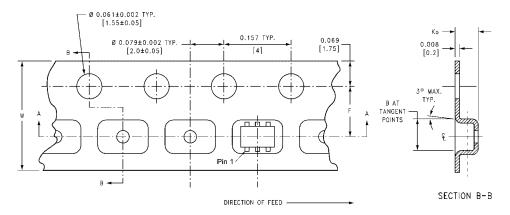






Packa	ige	MircoPa	Ta <sub>l</sub>	ре		Number	Cavity	Cover Tape
Design	ator		Sect			Cavities	Status	Status
			Leader (S			125 (typ)	Empty	Sealed
L6X	(		Car			5000	Filled	Sealed
			Trailer (H	lub End)		75 (typ)	Empty	Sealed
8.00 +0.30	2.000	4.00		4.00 0 0 0 0 1.60 TION A-A CALE:10X	-01.50 <sup>+0.</sup> 0.05	B ← B ← B ← B ← B ← B ← B ← B ← B ← B ←	3.50±0.05	SECTION B-B SCALE:10X
A -			(A)			TAPE SLOT	B C	
ape				T	AIL X	SCA	TAIL X LE: 3X	→ W <sub>3</sub> → W <sub>2</sub>
Size	Α	В	C	D	N	W1	W2	W3
mm	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.0
1	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.0)

# Physical Dimensions inches (millimeters) unless otherwise noted 0.65 B 1.25±0.10 2.10±0.10 0.20 +0.10 LAND PATTERN RECOMMENDATION ♦ max 0.1 **9** SEE DETAIL A 0.95±0.15 max 0.1 R0.14 GAGE PLANE R0.10 0.20 -- 0.425 NOMINAL DETAIL A NOTES: A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88. MAA06ARevC

- B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
- C. DIMENSIONS ARE IN MILLIMETERS.

6-Lead SC70, EIAJ SC88, 1.25mm Wide Package Number MAA06A

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

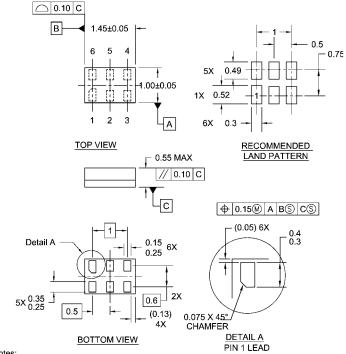

- Notes:
- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

Pb-Free 6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

### **Technology Description**

The Fairchild Switch family derives from and embodies Fairchild's proven switch technology used for several years in its 74LVX3L384 (FST3384) bus switch product.

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com