



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD

ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELB-1010 series is 12.7*6.35mm light bar display. Design for viewing distances up to 7 meters.
- There are separate anodes and cathodes for each light segment and choice of five colors is offered.
- These device are available with yellow offering a wide possibility in design.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELB-1010YD	GaAsP/GaP	Yellow	*****

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>




12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD


ECN : _____

Page: 2/5

■ Package Dimensions:

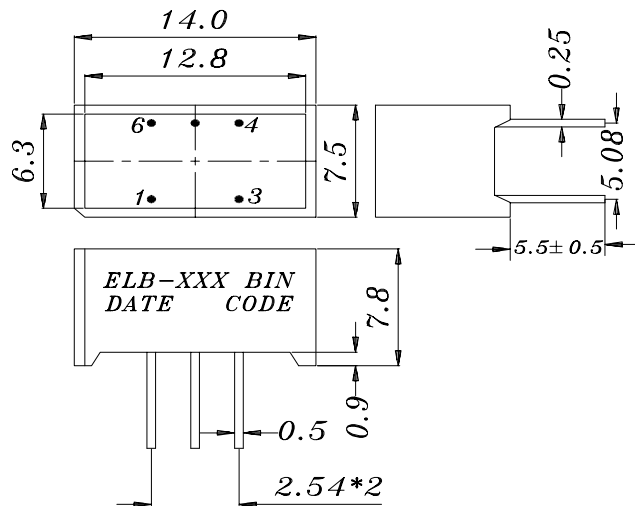

- 1 CATHODE A
- 2 NO PIN
- 3 ANODE B
- 4 CATHODE B
- 5 NO CONNECTION
- 6 ANODE A



■ NOTES:

- 1.All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
 - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD ECN : _____ Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	TsTg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	85	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA




■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	2.4	3.7	----	mcd	If=10mA
Peak Wavelength	λ p	----	585	----	nm	If=20mA
Dominant Wavelength	λ d	----	590	----	nm	If=20mA
Spectrum Radiation Bandwidth	△ λ	----	35	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	V	Vr=5V



12.7*6.35mm Light Bars

■ Typical Electro-Optical Characteristic Curves:

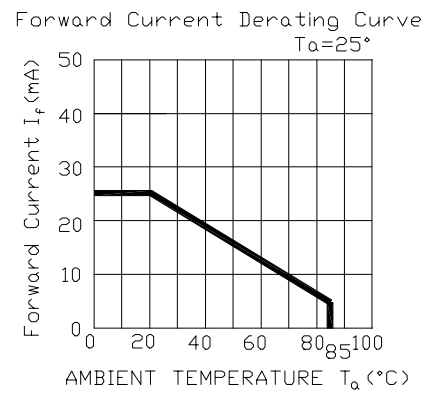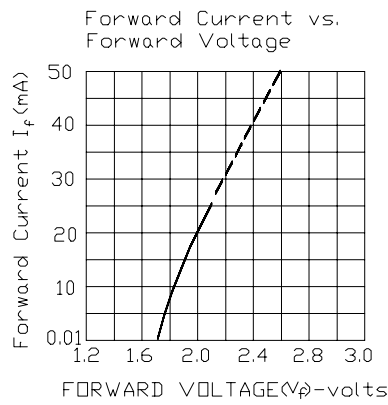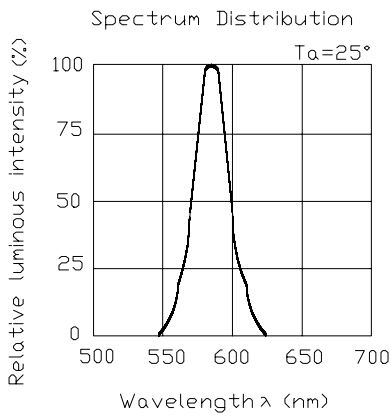



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD ECN : Page: 5/5

■ Reliability test item and condition:					
NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1